


TERMO DE ACEITE TÉCNICO

VSAT

Solicitante: VIVO- Projeto Escolas Rurais

Cliente: VIVO NOC/Operador: Rogerio Momi Frias

> **Empresa** VSAT-ID Link kbps **Plataforma EMC** Brasil VIVO-PER-25090445-PB 256/128

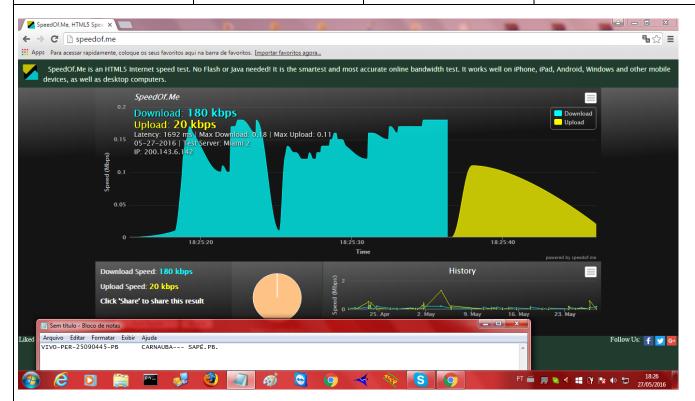

Satellite (DVB) RX Configuration

Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

ldx Pri SymbRate[Msps] Freq[GHz] Mode Popld SatId Pos SatName Enable Name

* 0 0 9.320000 12.055825 DVB-S2 102 0 0.0 E Yes 1 1 0.000000 0.000000 DVB-S2 2 0 0.0 E Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

: 1326, GlobalIP@Telstar-14R Network

Frequency : 12.056141 GHz Symbol Rate : 9.319862 Msps

S2 ModCod

- receiving : 1 QPSK-1/4 - current max : 16 8PSK-8/9

Pilot Frame length : Short DVB S2 Mode : ACM DVB S2 Stream type: MPEG-TS

Roll off : 0.20 : 13.1 dB SNR Input Power : -33 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -20 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 34.6 dBm EIRP : 45.5 dBW

Default CW Frequency: 14.125750 GHz

ATM mode : VC-Mux Header Compression: None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS) IDU Output Power : -21.0 dBm ODU Output Power : 34.8 dBm : 45.7 dBW EIRP Es/No : 12.0 dB

Header Compression: Disabled Timing correction : -156 us (262460 us)

Frequency correction: 30 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=750 ms 64 bytes from 8.8.8.8: time=520 ms 64 bytes from 8.8.8.8: time=530 ms 64 bytes from 8.8.8.8: time=530 ms 64 bytes from 8.8.8.8: time=530 ms

--- ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 520/570/750 ms