



TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Vitor Hugo


Cliente: VIVO

Empresa EMC
Brasil

VSAT-ID
VIVO-PER-26099292-PE

Link kbps
1024k/256k

Plataforma VSAT

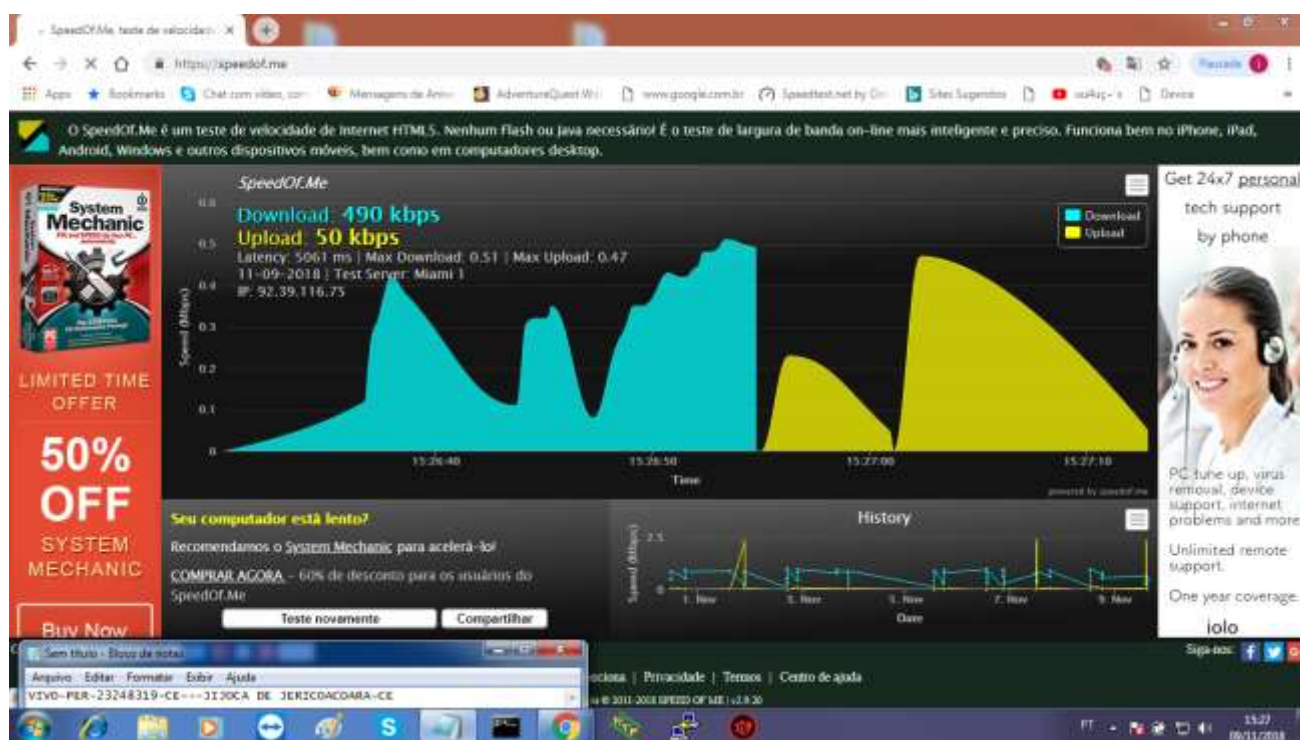

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>ping 8.8.8.8 -t

Disparando 8.8.8.8 com 32 bytes de dados:
Resposta de 8.8.8.8: bytes=32 tempo=600ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=668ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=611ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=830ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=877ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=573ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=683ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=765ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=830ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=899ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=616ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=727ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=849ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=900ms TTL=118

Estatísticas do Ping para 8.8.8.8:
    Pacotes: Enviados = 14, Recebidos = 14, Perdidos = 0 (0% de
    perda),
Aproximar um número redondo de vezes em milissegundos:
    Mínimo = 573ms, Máximo = 900ms, Média = 744ms
Control-C
^C
C:\Users\Asus>arp -a

Interface: 10.29.68.210 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.68.209      00-20-0e-10-7c-ae    dinâmico
10.29.68.215      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIU0-PER-23248319-CE-JIJOCA DE JERICOACOARA-CE_
```

Telnet 10.29.68.206

Satellite (DDB) TX Configuration

Auto start : Enabled
DUPC status : Disabled
IDB Output Power : -18 dBm
IDB Max Output Power : 4.9 dBm
ODB Output Power : 34.8 dBm
EIRP : 47.8 dBm
Default CW Frequency : 0.680000 GHz
OTM mode : SC-FSS
Header Compression : None

Satellite (DDB) Transmitter Status

State : On (DDB-RC32)
IDB Output Power : -14.1 dBm
ODB Output Power : 33.2 dBm
EIRP : 46.3 dBm
CW-M0 : 11.5 dB
Header Compression : Disabled
Timing correction : -84 us (248884 us)
Frequency correction: 838 Hz

Satellite (DDB) RX Configuration

Auto start : Enabled
Max Signalling MODCOD : 23 16QPSK-9/10
Max Traffic MODCOD : 28 32QPSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate(Mbps)	Freq(GHz)	Mode	PopId	SatId	Pas	SatName
0	0	38.000000	11.592000	DVB-S2 182	0	0.0 E		
1	1	25.333333	12.050000	DVB-S2 4	0	0.0 E		

Satellite (DDB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1336, 1148 Bonn
Frequency : 11.592179 GHz
Symbol Rate : 38.000000 Mbps
Q2 ModCod :
- receiving : 7 QPSK-3/4
- current max : 22 16QPSK-9/10
Pilot : On
Frame length : Short
DVB S2 Mode : SC-FSS
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
CNR : 15.4 dB
Input Power : -26 dBm

SatLink V5AT

Não seguro | 10.29.68.206/satlink/index_page... | [Painel](#)

Apps | Bookmarks | Chat com vídeo, zoom | Mensagem de Alerta

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:D6:10:7c:ae
DVB MAC Address	00:20:D6:10:7c:ae
System Up Time	0 days, 00:08:40
CPU Load	20%
System Name	VIVO-PER-23248319-CE
System Contact	
System Location	JUJOCA DE JERICÓ/COACARA-CE
ODU Serial Number	104854040203090209990000
ODU HW Version	4.2

You are logged in as **trial** (2) on **VIVO-PER-23248319-CE**

© Copyright 2008-2018 [SOLIS] Technologies AG ®. All Rights Reserved.

PT 15:51 06/11/2018

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>tracert 8.8.8.8

Rastreando a rota para google-public-dns-a.google.com [8.8.8.8]
com no máximo 30 saltos:

 1  100 ms    <1 ms    <1 ms    10.29.68.209
 2      *          *          *          Esgotado o tempo limite do pedido.
 3  1165 ms   1083 ms   1096 ms   172.30.3.102
 4  1010 ms   1118 ms   1075 ms   92.39.116.18
 5    727 ms   1089 ms   1141 ms   static-1.112.39.92.in-addr.arpa [92.39.112.1]
 6    998 ms   1093 ms   1045 ms   s200-189-162-154.ipb.diveo.net.br [200.189.162.1
54]
 7  1245 ms   1087 ms   1082 ms   200-147-28-129.static.uol.com.br [200.147.28.129
]
 8  1153 ms    836 ms    939 ms   as15169.saopaulo.sp.ix.br [187.16.216.55]
 9  1094 ms   1103 ms   1088 ms   108.170.245.161
10   846 ms    927 ms   1081 ms   216.239.56.45
11      *          Falha geral.

Rastreamento concluído.

C:\Users\Asus>arp -a

Interface: 10.29.68.210 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.68.209      00-20-0e-10-7c-ae    dinâmico
10.29.68.215      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIV0-PER-23248319-CE---JIJOCA DE JERICOACOARA-CE_
```