

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-24062049-RN

Link kbps
256k/128k

Plataforma
VSAT

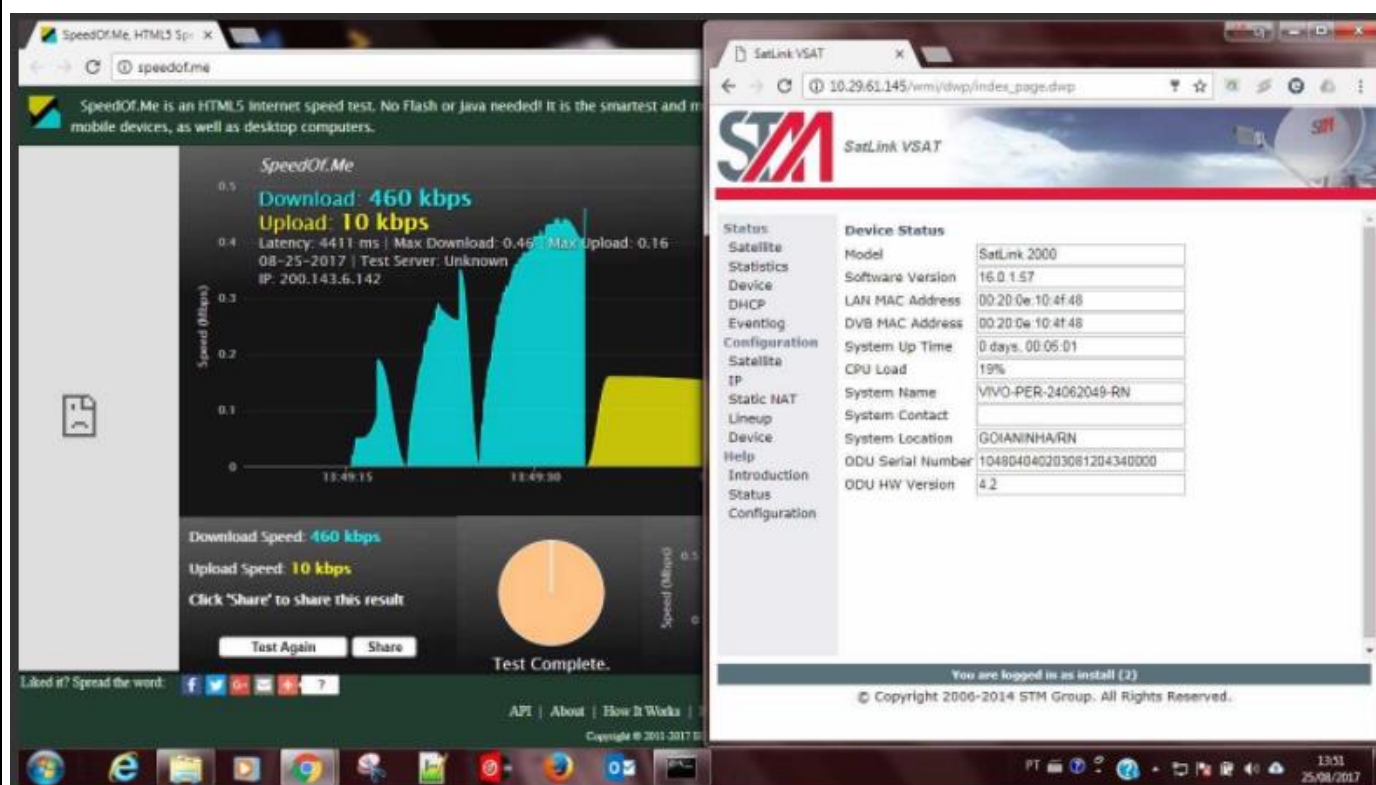

SatLink VSAT
10.29.61.145/wmi/dwp/index_page.dwp
STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status
Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:4f:40
DVB MAC Address: 00:20:0e:10:4f:45
System Up Time: 0 days, 00:05:01
CPU Load: 19%
System Name: VIVO-PER-24062049-RN
System Contact:
System Location: GOIANINHA/RN
ODU Serial Number: 104804040203081204340000
ODU HW Version: 4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Telnet 10.29.61.145
Satellite (DVB) TX Configuration
Auto start: Enabled
IDU Output Power: -20 dBm
ODU Max Output Power: 0.0 dBm
ODU Output Power: 32.7 dBm
EIRP: 46.0 dBm
Default GN Frequency: 0.000000 GHz
RTM mode: UC-Max
Header Compression: None
Satellite (DVB) Transmitter Status
State: On (DVB-RCS2)
IDU Output Power: -15.7 dBm
ODU Output Power: 33.0 dBm
EIRP: 46.2 dBm
Rx/No: 13.5 dB
Header Compression: Disabled
Timing correction: -41 us (251221 us)
Frequency correction: -100 Hz
Satellite (DVB) RX Configuration
Auto start: Enabled
Max Traffic MODCOD: 23 16APSK-9/10
RX watchdog: 15 minute
Idx Pri SymbolRate(Mbps) Freq(GHz) Mode PopId SatId Pos SatName
0 0 25.333333 12.050000 DVB-S2 102 0 0.0 E
1 1 15.000000 12.050000 DVB-S2 4 0 0.0 E
Satellite (DVB) Receiver Status
Rx State: On
DVB State: Forward link up
Network: 1326, IT4R Beam
Frequency: 12.049972 GHz
Symbol Rate: 25.332816 Mbps
S2 ModCod:
receiving: 18 16APSK-2/3
current max: 20 16APSK-4/5
Pilot: On
Frame length: Short
DVB S2 Mode: ACM
DVB S2 Stream type: MPEG-TS
Roll off: 0.20
SNR: 14.3 dB
Input Power: -22 dBm

SatLink VSAT
10.29.61.145/wmi/dwp/index_page.dwp
STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status
Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:4f:40
DVB MAC Address: 00:20:0e:10:4f:45
System Up Time: 0 days, 00:05:01
CPU Load: 19%
System Name: VIVO-PER-24062049-RN
System Contact:
System Location: GOIANINHA/RN
ODU Serial Number: 104804040203081204340000
ODU HW Version: 4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe
Resposta de 8.8.8.8: bytes=32 tempo=57ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=76ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=77ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=85ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=56ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=61ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=67ms TTL=44
Excedido o tempo limite de pedido.
Resposta de 8.8.8.8: bytes=32 tempo=71ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=80ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=82ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=56ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=57ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=67ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=62ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=62ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=64ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=64ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=68ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=70ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=76ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=81ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=84ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=87ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=87ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=87ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=59ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=64ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=72ms TTL=44
Estatísticas de Ping para 8.8.8.8:
Pacotes: Enviados = 43, Recebidos = 42, Perdidos = 1 (2% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 56ms, Máximo = 983ms, Média = 725ms
Control-C
C:\Users\NofTernandez>arp -a
Interface: 10.29.61.145 --- 0x0
Endereço IP Endereço físico Tipo
10.29.61.145 00-20-0e-10-4f-40 dinâmico
10.29.61.151 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.251 01-00-5e-00-00-1b estático
224.0.0.252 01-00-5e-00-00-1c estático
224.0.1.68 01-00-5e-00-01-3c estático
239.255.255.250 01-00-5e-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático
C:\Users\NofTernandez>