

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-26071177-PE

Link kbps
256K/128K

Plataforma
VSAT

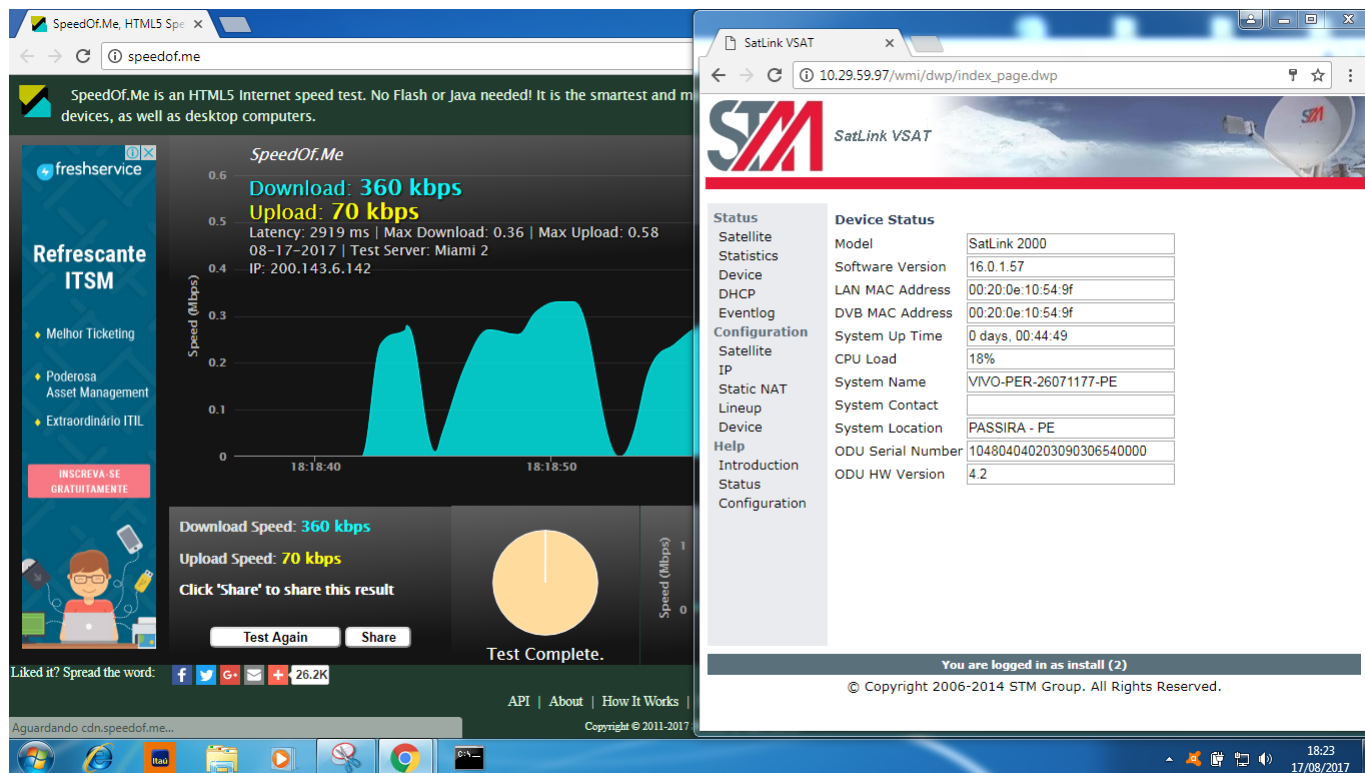

```
# dvb tx show
```

Satellite (DVB) TX Configuration

```
-----
Auto start           : Enabled
IDU Output Power     : -20 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 33.0 dBm
EIRP                 : 46.0 dBW
Default CW Frequency: 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
```

Satellite (DVB) Transmitter Status

```
-----
State                : On (DVB-RCS2)
IDU Output Power     : -23.4 dBm
ODU Output Power     : 32.9 dBm
EIRP                 : 45.9 dBW
```

Es/No : 11.5 dB
Header Compression : Disabled
Timing correction : -76 us (251236 us)
Frequency correction: -170 Hz

dvb rx show

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

| Idx | Pri | SymbRate[Mbps] | Freq[GHz] | Mode | PopId | SatId | Pos | SatName |
|------|-----|----------------|-----------|--------|-------|-------|-------|---------|
| Name | | Enable | | | | | | |
| * 0 | 0 | 25.333333 | 12.050000 | DVB-S2 | 102 | 0 | 0.0 E | |
| Yes | | | | | | | | |
| 7 | 7 | 30.000000 | 12.050000 | DVB-S2 | 102 | 0 | 0.0 E | |
| Yes | | | | | | | | |

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.049865 GHz
Symbol Rate : 25.332965 Msps
S2 ModCod
- receiving : 12 8PSK-3/5
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 16.3 dB
Input Power : -19 dBm

SatLink VSAT

10.29.59.97/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:54:9f

00:20:0e:10:54:9f

0 days, 00:44:49

18%

VIVO-PER-26071177-PE

PASSIRA - PE

104804040203090306540000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

CMD - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=2009ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=744ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=815ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=740ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=761ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2073ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1932ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=804ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1667ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=962ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=612ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=685ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=737ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2522ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1486ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=743ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=899ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1753ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2339ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=812ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1630ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1091ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=620ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=564ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=679ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2207ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1644ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=803ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1481ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=562ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1727ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=593ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1010ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=894ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=604ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=637ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=599ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1159ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1955ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=581ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=638ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=979ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1003ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 68, Recebidos = 68, Perdidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 562ms, Máximo = 2665ms, Média = 1109ms
Control-C
C:\Windows\System32>

PT

18:19

17/08/2017