

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Cunha

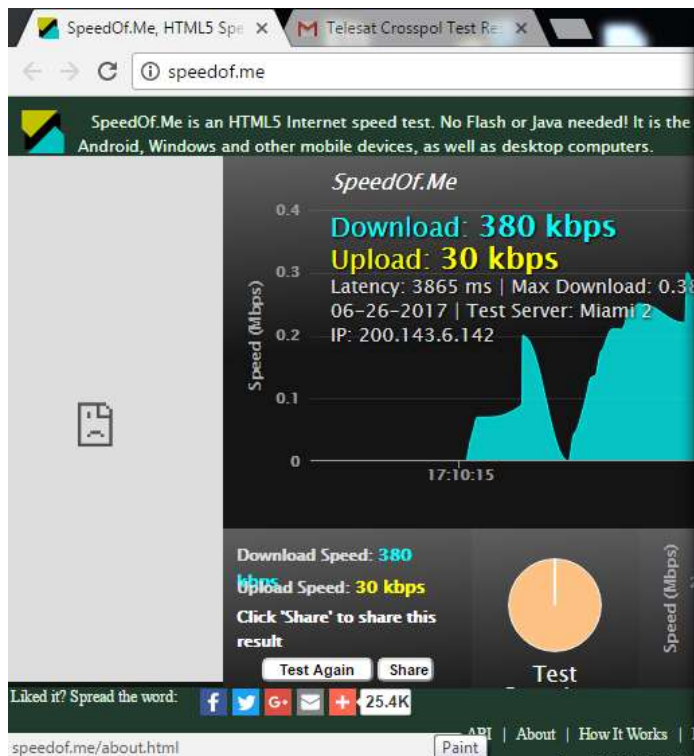

Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-27018733-AL

Link kbps
256k/128k

Plataforma
VSAT

SatLink VSAT

10.29.47.121/wmi/dwp/index_page.dwp

Status

Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction

Device Status

Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:4a:76
DVB MAC Address: 00:20:0e:10:4a:76
System Up Time: 0 days, 00:24:19
CPU Load: 14%
System Name: VIVO-PER-27018733-AL
System Contact:
System Location: FEIRA GRANDE/AL
ODU Serial Number: 104804040203090300580000

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.



SatLink VSAT

10.29.47.121/wmi/dwp/index_page.dwp

Status

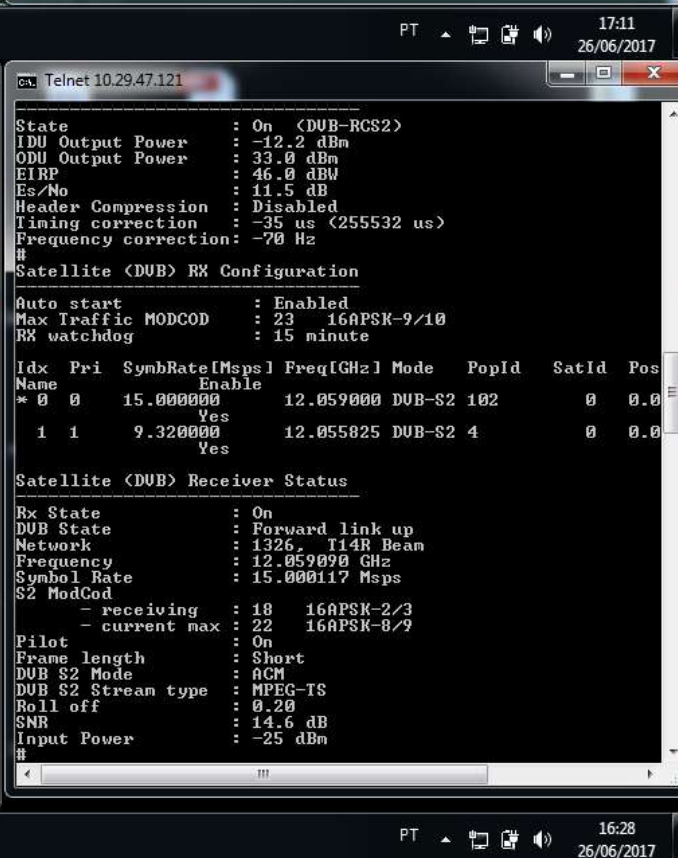
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction

Device Status

Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:4a:76
DVB MAC Address: 00:20:0e:10:4a:76
System Up Time: 0 days, 00:12:25
CPU Load: 17%
System Name: VIVO-PER-27018733-AL
System Contact:
System Location: FEIRA GRANDE/AL
ODU Serial Number: 104804040203090300580000

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.



Telnet 10.29.47.121

```

State : On <DUB-RCS2>
IDU Output Power : -12.2 dBm
ODU Output Power : 33.0 dBm
EIRP : 46.0 dBW
Es/No : 11.5 dB
Header Compression : Disabled
Timing correction : -35 us <255532 us>
Frequency correction: -70 Hz
#
Satellite <DUB> RX Configuration
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx Pri SymbRate[Mbps] Freq[GHz] Mode PopId SatId Pos
Name Enable
* 0 0 15.000000 12.059000 DUB-S2 102 0 0.0
1 1 9.320000 12.055025 DUB-S2 4 0 0.0

Satellite <DUB> Receiver Status
Rx State : On
DUB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.059090 GHz
Symbol Rate : 15.000117 Msps
S2 ModCod
- receiving : 18 16APSK-2/3
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 14.6 dB
Input Power : -25 dBm
#
  
```

