



TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Vitor Hugo


Cliente: VIVO

Empresa EMC
Brasil

VSAT-ID
VIVO-PER-23045345-CE

Link kbps
1024k/256k

Plataforma VSAT

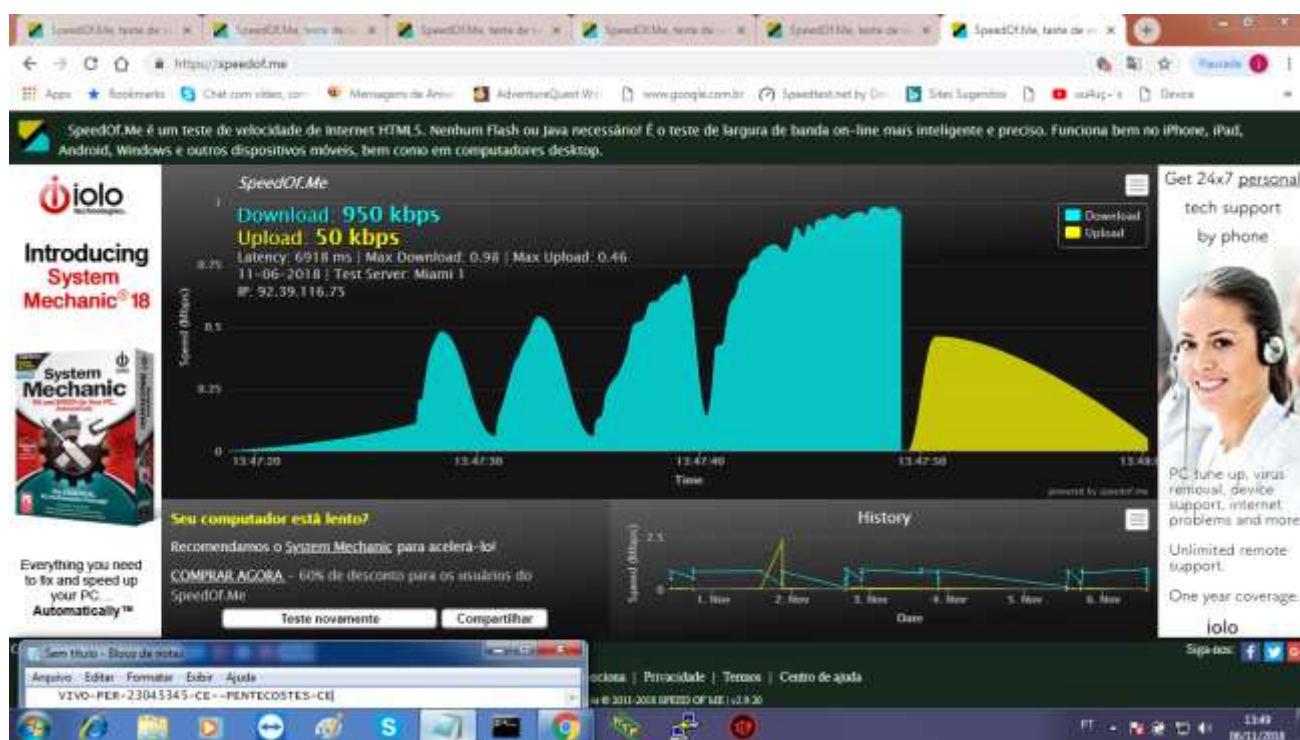

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>ping 8.8.8.8 -t

Disparando 8.8.8.8 com 32 bytes de dados:
Resposta de 8.8.8.8: bytes=32 tempo=765ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=883ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=605ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=626ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=706ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=780ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=853ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=580ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=649ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=745ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1520ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1476ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=562ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=790ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1196ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=710ms TTL=118

Estatísticas do Ping para 8.8.8.8:
    Pacotes: Enviados = 16, Recebidos = 16, Perdidos = 0 (0% de
    perda).
Aproximar um número redondo de vezes em milissegundos:
    Mínimo = 562ms, Máximo = 1520ms, Média = 840ms
Control-C
^C
C:\Users\Asus>arp -a

Interface: 10.29.76.122 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.76.121     00-20-0e-10-8d-76   dinâmico
10.29.76.127     ff-ff-ff-ff-ff-ff   estático
224.0.0.2        01-00-5e-00-00-02   estático
224.0.0.22       01-00-5e-00-00-16   estático
224.0.0.251      01-00-5e-00-00-fb   estático
224.0.0.252      01-00-5e-00-00-fc   estático
239.255.255.250  01-00-5e-7f-ff-fa   estático
255.255.255.255  ff-ff-ff-ff-ff-ff   estático

C:\Users\Asus>UIU0-PER-23045345-PER--PENTECOSTES-CE_
```

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>tracert 8.8.8.8

Rastreando a rota para google-public-dns-a.google.com [8.8.8.8]
com no máximo 30 saltos:

  1      1 ms      <1 ms      <1 ms      10.29.76.121
  2      *          *          *          Esgotado o tempo limite do pedido.
  3    1393 ms    1190 ms    643 ms    172.30.3.102
  4    1012 ms    1070 ms    1054 ms    92.39.116.18
  5     973 ms    1161 ms    1060 ms    static-1.112.39.92.in-addr.arpa [92.39.112.1]
  6    1050 ms    1099 ms    1085 ms    s200-189-162-154.ipb.diveo.net.br [200.189.162.1
54]
  7     911 ms    1089 ms    1074 ms    200-147-28-129.static.uol.com.br [200.147.28.129
]
  8    1109 ms    1085 ms    1087 ms    as15169.saopaulo.sp.ix.br [187.16.216.55]
  9     1163 ms    1100 ms    1042 ms    108.170.245.161
 10    1057 ms    1078 ms    1075 ms    108.170.232.43
 11     979 ms    1044 ms    1093 ms    google-public-dns-a.google.com [8.8.8.8]

Rastreamento concluído.

C:\Users\Asus>arp -a

Interface: 10.29.76.122 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.76.121      00-20-0e-10-8d-76    dinâmico
10.29.76.127      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIU0-PER-23045345-PE--PENTECOSTES-CE
```

Telnet 10.29.76.121

```

Satellite <DVB> TX Configuration
Auto start      : Disabled
DUPC status     : Disabled
DVB Output Power : -12 dBm
DVB Max Output Power: 0.0 dBm
Default CN Frequency: 0.000000 GHz
RTM mode        : WC-Flux
Header Compression : None

Satellite <DVB> Transmitter Status
State           : On (DVB-RC22)
DVB Output Power : -10.9 dBm
CN/No           : 13.0 dB
Header Compression : Disabled
Timing correction : -82 us (248528 us)
Frequency correction: 838 Hz

Satellite <DVB> RX Configuration
Auto start      : Enabled
Max Signalling MODCOD : 20 16APSK-9/10
Max Traffic MODCOD : 20 32APSK-9/10
RX watchdog     : 15 minute

idx Pri SymbolRate(Mps) Freq(GHz) Mode Popid SatId Pwr SatName
-----
0 0 30.000000 11.592000 DVB-S2 100 0 0.0 E

Satellite <DVB> Receiver Status
Rx State        : On
DVB State       : Forward link up
Network         : 1326 1140 Bps
Frequency       : 11.592000 GHz
Symbol Rate     : 29.999999 Mps
S2 ModCod      : 19 16APSK-1/4
- receiving     : 22 16APSK-8/9
Pilot           : On
Preamble length : Short
DVB S2 Mode     : ACM
DVB S2 Stream type : MPEG-TS
Null off        : 0.38
CNR             : 15.3 dB
Input Power     : -11 dBm
0 =

```

SatLink V5AT

Não seguro | 10.29.76.121/wws/dwp/index_page... | [Favoritos](#)

SatLink

[Status](#)
[Satellite](#)
[Statistics](#)
[Device](#)
[DHCP](#)
[Eventlog](#)
[Configuration](#)
[Satellite](#)
[IP](#)
[Static NAT](#)
[Lineup](#)
[Device](#)
[Tools](#)
[Help](#)
[Introduction](#)
[Status](#)
[Configuration](#)

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:D6:10:8d:76
DVB MAC Address	00:20:D6:10:8d:76
System Up Time	0 days, 00:24:05
CPU Load	31%
System Name	VIVO-PER-23045345-CE
System Contact	
System Location	Pantacostas - CE

You are logged in as [testall \(2\)](#) on [VIVO-PER-23045345-CE](#)

© Copyright 2009-2018 NCCO Global Technologies AG. All Rights Reserved

1121 06/11/2018