

**Solicitante:** VIVO- Projeto Escolas Rurais

**NOC/Operador:** Wallace Teixeira


**Cliente:** VIVO

**Empresa**  
EMC Brasil

**VSAT-ID**  
VIV0-PER-27022137-AL

**Link kbps**  
256k/128k

**Plataforma**  
VSAT

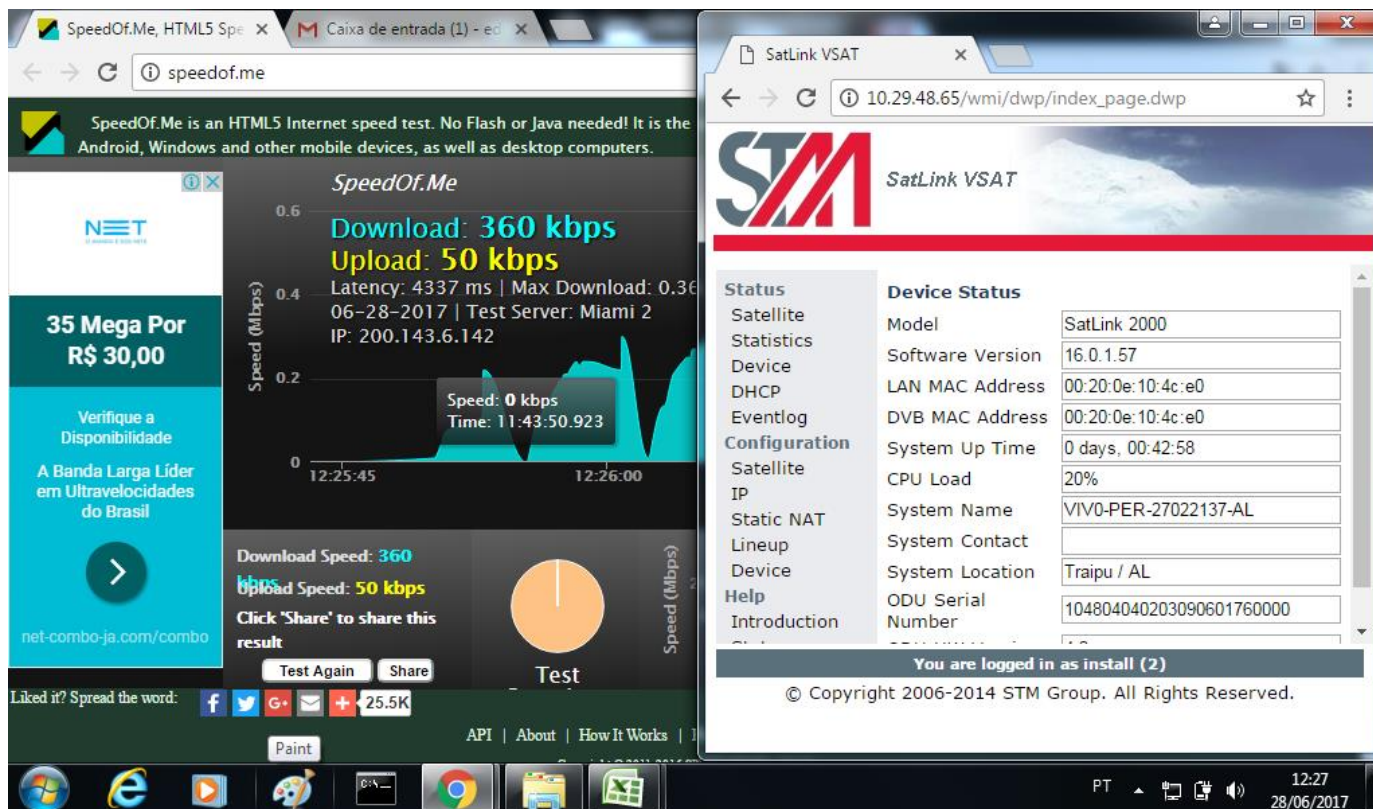

# dvb tx show

Satellite (DVB) TX Configuration

```
-----
Auto start           : Enabled
IDU Output Power     : -20 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 32.7 dBm
EIRP                 : 46.0 dBW
Default CW Frequency : 0.000000 GHz
ATM mode              : VC-Mux
Header Compression   : None
```

```
# dvb rx show
```

# Satellite (DVB) RX Configuration

```
-----
Auto start           : Enabled
Max Traffic MODCOD   : 23   16APSK-9/10
RX watchdog          : 15 minute
```

| Idx    | Pri | SymbRate[Mbps] | Freq[GHz] | Mode   | PopId | SatId | Pos   | SatName | Name |
|--------|-----|----------------|-----------|--------|-------|-------|-------|---------|------|
| Enable |     |                |           |        |       |       |       |         |      |
| * 0    | 0   | 15.000000      | 12.059000 | DVB-S2 | 102   | 0     | 0.0 E |         |      |
| Yes    |     |                |           |        |       |       |       |         |      |
| 1      | 1   | 9.320000       | 12.055825 | DVB-S2 | 4     | 0     | 0.0 E |         |      |
| Yes    |     |                |           |        |       |       |       |         |      |
| 6      | 6   | 25.333333      | 12.050000 | DVB-S2 | 102   | 0     | 0.0 E |         |      |
| Yes    |     |                |           |        |       |       |       |         |      |
| 7      | 7   | 30.000000      | 12.050000 | DVB-S2 | 102   | 0     | 0.0 E |         |      |
| Yes    |     |                |           |        |       |       |       |         |      |

SatLink VSAT

10.29.48.65/wmi/dwp/index\_page.dwp

STM

SatLink VSAT

Status

Device Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial

Number

SatLink 2000

16.0.1.57

00:20:0e:10:4c:e0

00:20:0e:10:4c:e0

0 days, 00:04:48

29%

VIV0-PER-27022137-AL

Traipu / AL

104804040203090601760000

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

cmd - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=731ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=821ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=871ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=596ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=698ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=778ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=866ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=844ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=908ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=667ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=753ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=796ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=869ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=588ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=676ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=763ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=830ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=578ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=632ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=699ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=791ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=878ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=588ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=665ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=756ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=827ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=911ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=614ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=706ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=784ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=870ms TTL=44  
Resposta de 8.8.8.8: bytes=32 tempo=591ms TTL=44  
  
Estatísticas do Ping para 8.8.8.8:  
Pacotes: Enviados = 74, Recebidos = 74, Perdidos = 0 (0% perda).  
Aproximar um número redondo de vezes em milissegundos:  
Mínimo = 568ms, Máximo = 1732ms, Média = 776ms  
Control-C  
C:\Windows\System32>

PT

11:38

28/06/2017