

**Solicitante:** VIVO- Projeto Escolas Rurais

**NOC/Operador:** Wallace Teixeira


**Cliente:** VIVO

**Empresa**  
EMC Brasil

**VSAT-ID**  
VIVO-PER-27018660-AL

**Link kbps**  
256k/128k

**Plataforma**  
VSAT

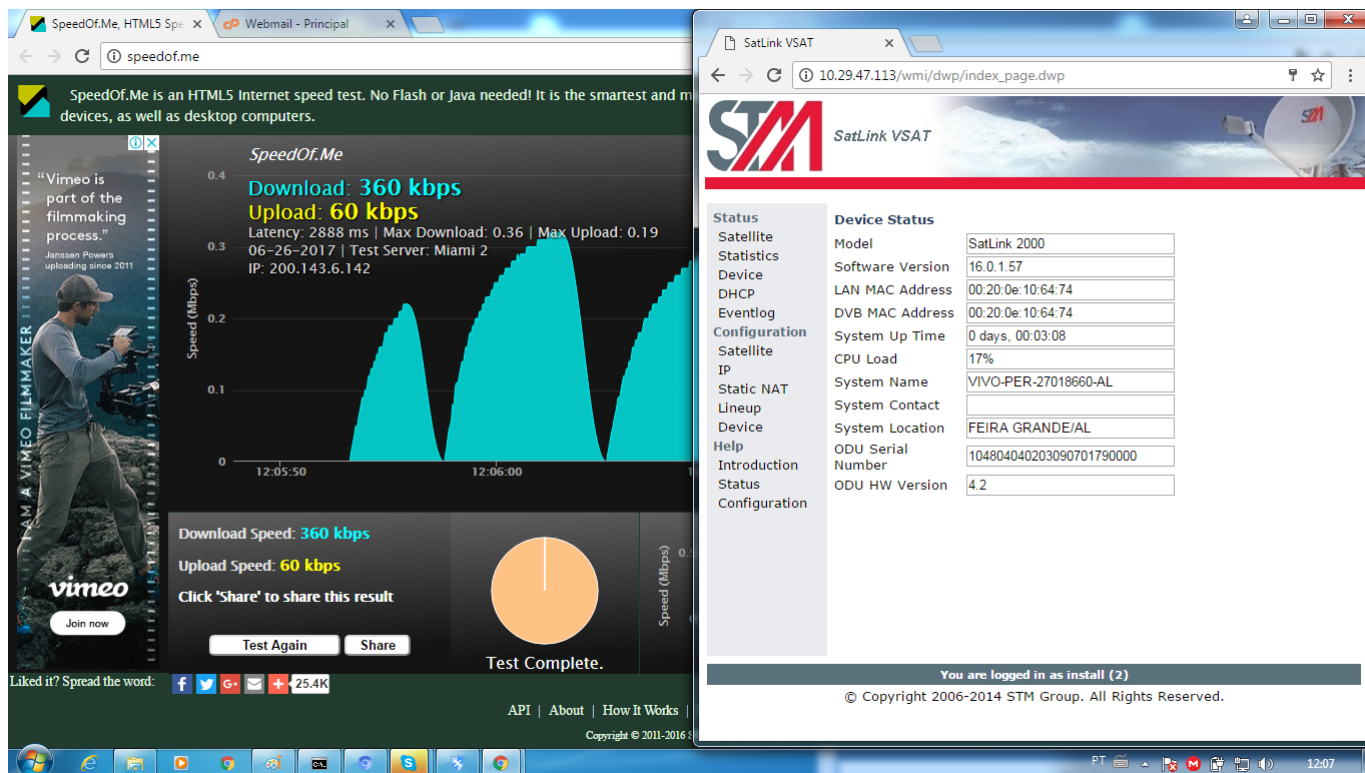

# dvb tx show

Satellite (DVB) TX Configuration

```
-----
Auto start           : Enabled
IDU Output Power     : -15 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 32.7 dBm
EIRP                 : 46.0 dBW
Default CW Frequency : 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
```

# dvb rx show

Satellite (DVB) RX Configuration

```
-----
Auto start           : Enabled
Max Traffic MODCOD    : 23    16APSK-9/10
RX watchdog           : 15 minute
```

Idx	Pri	SymbRate[Msp/s]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name
Enable									
* 0	0	15.000000	12.059000	DVB-S2	102	0	0.0 E		
Yes									
1	1	9.320000	12.055825	DVB-S2	4	0	0.0 E		
Yes									

SatLink VSAT

10.29.47.113/wmi/dwp/index\_page.dwp

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:64:74

00:20:0e:10:64:74

0 days, 00:03:08

17%

VIVO-PER-27018660-AL

FEIRA GRANDE/AL

104804040203090701790000

4.2

cmd - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=570ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=571ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=765ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=833ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1710ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=2409ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1124ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=2897ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=580ms TTL=44

Estatísticas do Ping para 8.8.8.8:

Pacotes: Enviados = 47, Recebidos = 0 (0% de perda).

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 550ms, Máximo = 2897ms, Média = 1122ms

Control-C

^C

C:\Windows\System32>arp -a

Interface: 10.29.47.114 --- 0xb

Endereço IP	Endereço físico	Tipo
10.29.47.113	00-20-0e-10-64-74	dinâmico
10.29.47.119	ff-ff-ff-ff-ff-ff	estático
224.0.0.2	01-00-5e-00-00-02	estático
224.0.0.251	01-00-5e-00-00-fb	estático
224.0.0.252	01-00-5e-00-00-fc	estático
224.0.0.253	01-00-5e-00-00-fd	estático
239.192.152.143	01-00-5e-48-98-0f	estático
239.255.255.250	01-00-5e-7f-ff-fa	estático
255.255.255.255	ff-ff-ff-ff-ff-ff	estático

C:\Windows\System32>\_

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

PT 11:53