


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Jefferson de Souza Marques Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-23140070-CE
 256k/128k
 VSAT

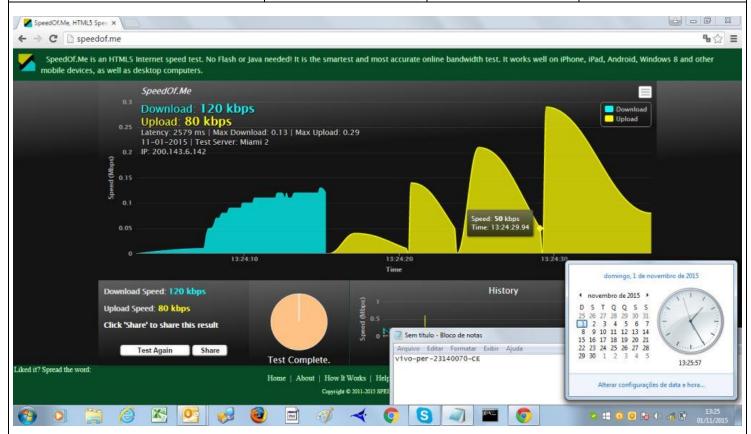

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 9.320000 12.055825 DVB-S2 4 Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency : 12.055823 GHz Symbol Rate : 9.319970 Msps

S2 ModCod

- receiving : 15 8PSK-5/6 - current max : 23 16APSK-9/10

Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.20
SNR : 14.2 dB
Input Power : -28 dBm

```
Satellite (DVB) TX Configuration
-----
Auto start : Enabled IDU Output Power : -21 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 35.7 dBm
                  : 49.0 dBW
EIRP
Default CW Frequency: 14.125500 GHz
ATM mode : VC-Mux
Header Compression : None
Satellite (DVB) Transmitter Status
_____
State : On (TDMA)

IDU Output Power : -17.9 dBm

ODU Output Power : 34.7 dBm
EIRP
                   : 48.8 dBW
Es/No
                   : 13.9 dB
Header Compression : Disabled
Timing correction : -125 us (260976 us)
Frequency correction: 360 Hz
IP DVB 10.50.1.16/32
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=1550 ms
64 bytes from 8.8.8.8: time=920 ms
64 bytes from 8.8.8.8: time=910 ms
64 bytes from 8.8.8.8: time=770 ms
64 bytes from 8.8.8.8: time=900 ms
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 770/1000/1550 ms
```