


# TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogerio Momi Frias Cliente: VIVO

> **Empresa** VSAT-ID Link kbps **Plataforma EMC** Brasil VIVO-PER-31029572-MG 256/128 VSAT

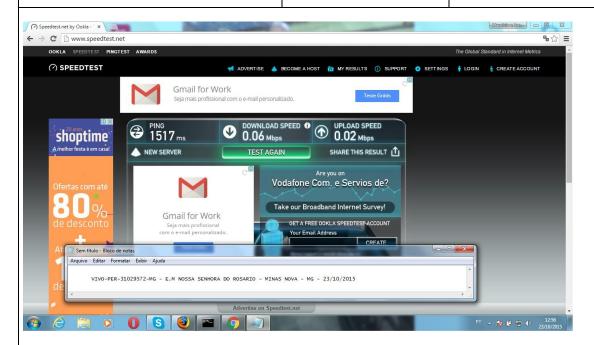

#### Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable

12.055825 DVB-S2 4 \* 0 0 9.320000 Yes 0.000000 0.000000 DVB-S2 2

# Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

: Forward IIIIk up : 1326, GlobalIP@Telstar-14R Network

: 12.055776 GHz Frequency Symbol Rate : 9.319912 Msps

S2 ModCod

- receiving : 1 QPSK-1/4 - current max : 23 16APSK-9/10

Pilot : On Frame length : Short DVB S2 Mode : ACM Roll off : 0.25 : 14.7 dB SNR : -25 dBm Input Power

#### Satellite (DVB) TX Configuration

-----

Auto start : Enabled IDU Output Power : -30 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 34.7 dBm EIRP : 48.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

## Satellite (DVB) Transmitter Status

-----

State : On (TDMA)
IDU Output Power : -17.6 dBm
ODU Output Power : 33.9 dBm
EIRP : 47.2 dBW
Eb/No : 16.0 dB
Header Compression : Disabled

Timing correction : -196 us (261643 us)

Frequency correction: -360 Hz

## ping 8.8.8.8

64 bytes from 8.8.8.8: time=550 ms 64 bytes from 8.8.8.8: time=560 ms 64 bytes from 8.8.8.8: time=560 ms 64 bytes from 8.8.8.8: time=670 ms 64 bytes from 8.8.8.8: time=550 ms

## --- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 550/570/670 ms