

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31202916-MG

Link kbps
256K/128K

Plataforma
VSAT

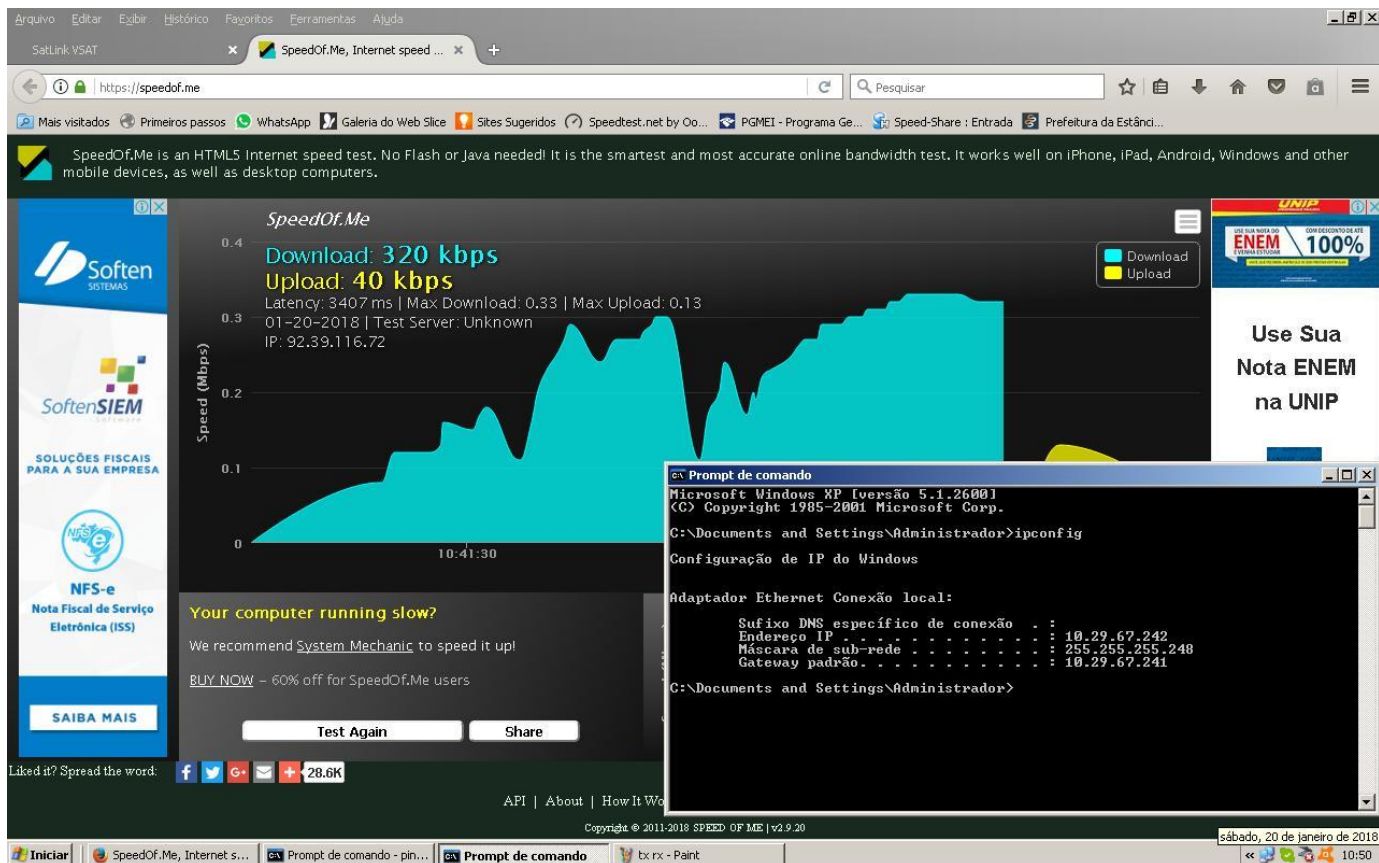

dvb tx show

Satellite (DVB) TX Configuration

```
-----
Auto start           : Enabled
IDU Output Power     : -20 dBm
IDU Max Output Power : 0.0 dBm
Default CW Frequency: 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
```

Satellite (DVB) Transmitter Status

```
-----
State                : On (DVB-RCS2)
IDU Output Power     : -20.0 dBm
Es/No                : 13.0 dB
Header Compression    : Disabled
Timing correction     : -119 us (249792 us)
Frequency correction  : -20 Hz
```

```
# dvb rx show
```

Satellite (DVB) RX Configuration

```
-----
Auto start           : Enabled
Max Traffic MODCOD   : 23   16APSK-9/10
RX watchdog          : 15 minute
```

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName
Name		Enable						
* 0	0	30.000000	12.050000	DVB-S2	102	0	0.0 E	
Yes								
1	1	25.333333	12.050000	DVB-S2	4	0	0.0 E	
Yes								

Satellite (DVB) Receiver Status

```
-----
Rx State             : On
DVB State            : Forward link up
Network              : 1326, T14R Beam
Frequency             : 12.050022 GHz
Symbol Rate          : 29.999791 Msps
S2 ModCod
- receiving          : 7   QPSK-3/4
- current max        : 22  16APSK-8/9
Pilot                 : On
Frame length          : Short
DVB S2 Mode           : ACM
DVB S2 Stream type    : MPEG-TS
Roll off              : 0.20
SNR                   : 14.9 dB
Input Power           : -32 dBm
```

Arquivo

Editar

Exibir

Histórico

Favoritos

Ferramentas

Ajuda

SatLink VSAT

SpeedOf.Me, Internet speed ...

10.29.67.241/wmi/dwp/index_page.dwp

Mais visitados

Primeiros passos

WhatsApp

Galeria do Web Slice

Sites Sugeridos

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

SatLink 2000

16.0.1.57

00:20:0e:10:64:44

00:20:0e:10:64:44

0 days, 00:01:30

22%

VIVO-PER-31202916-MG

Lavras - MG

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved

Prompt de comando

Resposta de 8.8.8.8: bytes=32 tempo=1969ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1112ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=836ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2586ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1476ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1049ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1045ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1092ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1126ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1019ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1047ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1081ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1105ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1071ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1067ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1084ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1084ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=835ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=793ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=892ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=756ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1018ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1066ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1094ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1089ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1078ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1084ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1080ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=832ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2229ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1080ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1078ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1083ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1074ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=963ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1166ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1093ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1072ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1062ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1082ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1031ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1078ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1086ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1074ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2518ms TTL=49

Estatísticas do Ping para 8.8.8.8:

Pacotes: Enviados = 70, Recebidos = 70, Perdidos = 0 (0% de perda).

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 793ms, Máximo = 2753ms, Média = 1161ms

Control-C

C:\Documents and Settings\Administrador>

Iniciar

SatLink VSAT - Mozilla Fir...

Prompt de comando

tx rx - Paint

teste de vel - Paint

sábado, 20 de janeiro de 2018

10:51