

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-26070049-PE

Link kbps
256K/128K

Plataforma
VSAT

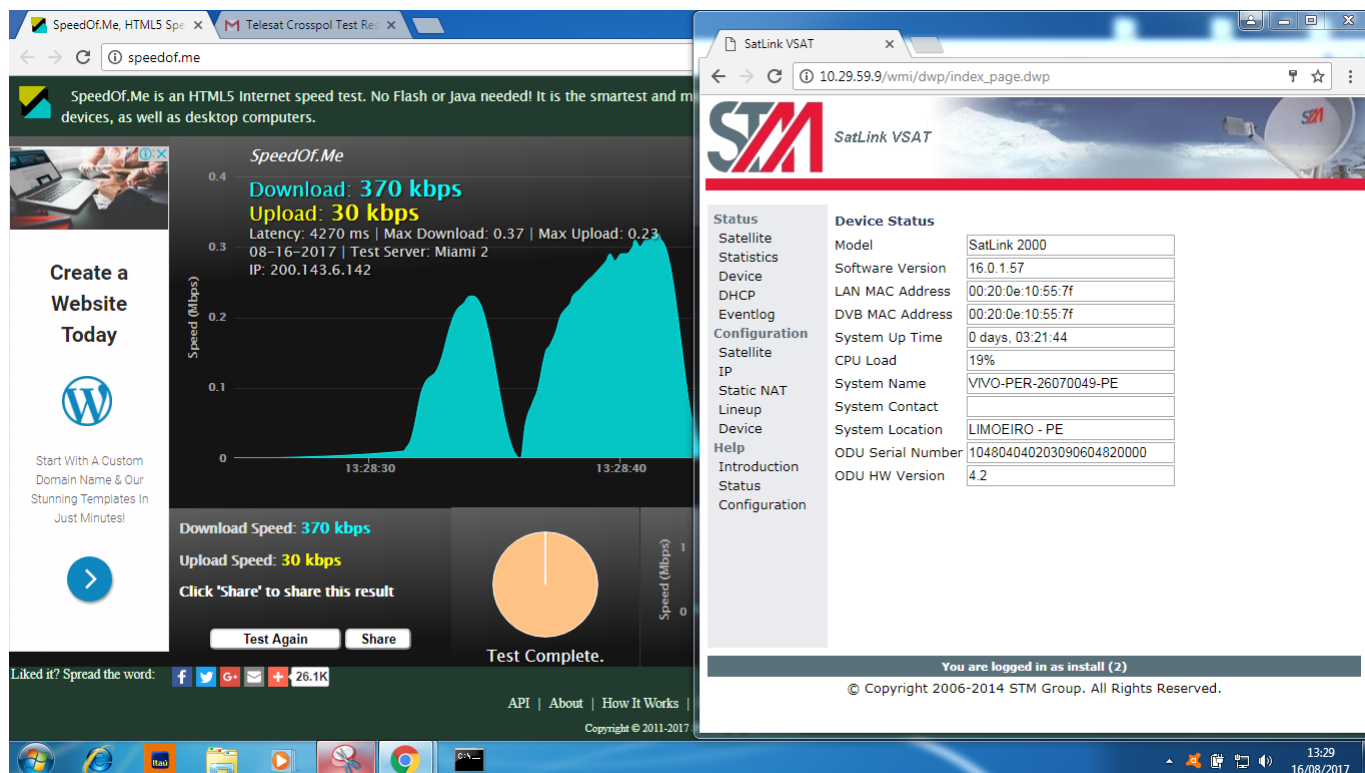

dvb tx show

Satellite (DVB) TX Configuration

```

Auto start           : Enabled
IDU Output Power     : -20 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 33.0 dBm
EIRP                 : 46.0 dBW
Default CW Frequency : 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
  
```

Satellite (DVB) Transmitter Status

```

State                : On (DVB-RCS2)
IDU Output Power     : -20.2 dBm
ODU Output Power     : 33.1 dBm
EIRP                 : 46.1 dBW
Es/No                : 11.5 dB
Header Compression   : Disabled
  
```

Timing correction : -63 us (251262 us)
Frequency correction: 0 Hz

dvb rx show

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName
Name		Enable						
* 0	0	25.333333	12.050000	DVB-S2	102	0	0.0 E	
Yes								
7	7	30.000000	12.050000	DVB-S2	102	0	0.0 E	
Yes								

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.050104 GHz
Symbol Rate : 25.332848 Msps
S2 ModCod
- receiving : 12 8PSK-3/5
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 15.8 dB
Input Power : -25 dBm

SatLink VSAT

10.29.59.9/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:55:7f

00:20:0e:10:55:7f

0 days, 00:49:33

21%

VIVO-PER-26070049-PE

LIMOEIRO - PE

104804040203090604820000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

CMD - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=1247ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=712ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=704ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1220ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=722ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=811ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1244ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1056ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=728ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=816ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=807ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1300ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1462ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=714ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1047ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1003ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1051ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=663ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1090ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1700ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=754ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1191ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1172ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1335ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1432ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=724ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1149ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2168ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=573ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1150ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1069ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=712ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1284ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=586ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1172ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1071ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1003ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=722ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=803ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1043ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=774ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1215ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1050ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2209ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=681ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=749ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1183ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1437ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 63, Recebidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 573ms, Máximo = 2209ms, Média = 1073ms
Control-C
C:\Windows\System32>

PT

10:56

16/08/2017