



TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Alexandre Cruz


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-28007263-SE

Link kbps
256K/128k

Plataforma VSAT

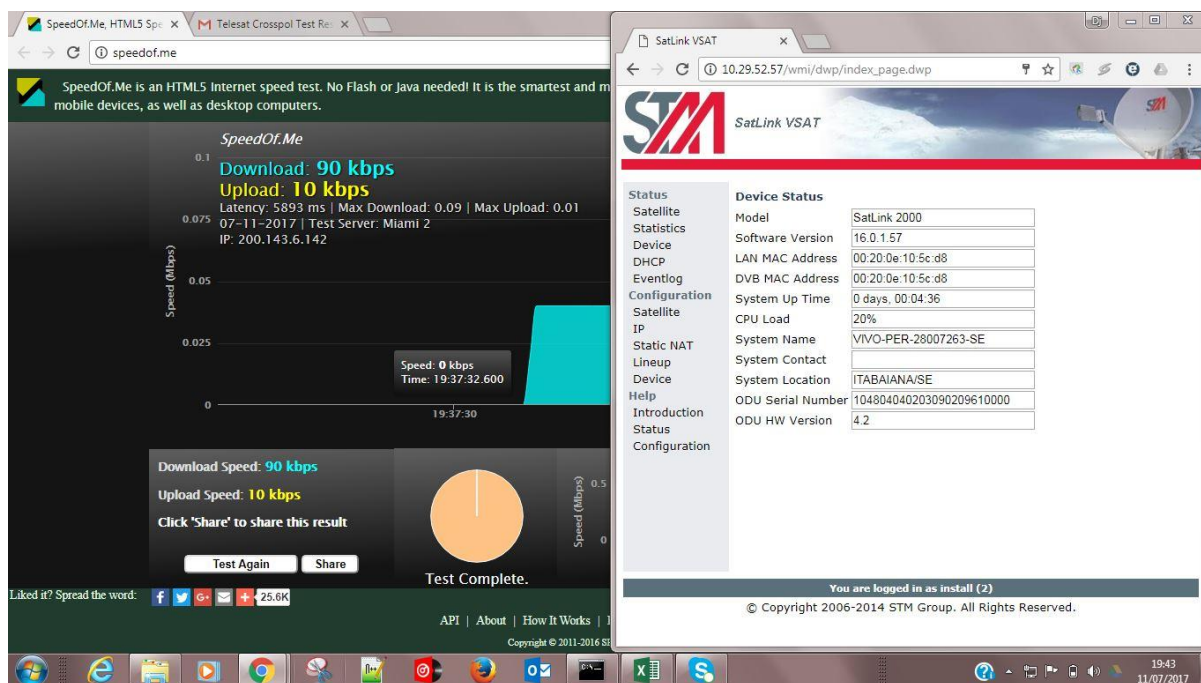

SatLink VSAT

10.29.52.57/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

SatLink 2000

Software Version

16.0.1.57

LAN MAC Address

00:20:0e:10:5c:d8

DVB MAC Address

00:20:0e:10:5c:d8

System Up Time

0 days, 00:04:36

CPU Load

20%

System Name

VIVO-PER-28007263-SE

System Contact

System Location

ITABA/IANA/SE

ODU Serial Number

104804040203090209610000

ODU HW Version

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Telnet 10.29.52.57

Satellite <DVB> TX Configuration

Auto start : Enabled

IDU Output Power : -20 dBm

IDU Max Output Power : 0.0 dBm

ODU Output Power : 32.7 dBm

ELRP : 45.4 dBu

Default CW Frequency : 0.000000 GHz

QAM mode : QPSK

Header Compression : None

Satellite <DVB> Transmitter Status

State : On (DVB-RCS2)

IDU Output Power : -16.2 dBm

ODU Output Power : 32.1 dBm

ELRP : 45.4 dBu

Es/No : 14.0 dB

Header Compression : Disabled

Timing correction : 15 us (250036 us)

Frequency correction : -20 Hz

Satellite <DVB> RX Configuration

Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

Idx Pri SymbRate[Maps] Freq[GHz] Mode PopId SatId Pos SatName

* 0 0 25.333333 12.050000 DVB-S2 102 0 0.0 E

1 1 15.000000 12.059000 DVB-S2 4 0 0.0 E

6 6 25.333333 12.050000 DVB-S2 102 0 0.0 E

Satellite <DVB> Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, 114R Beam

Frequency : 12.050100 GHz

Symbol Rate : 25.333043 Maps

S2 ModCod : - receiving : 19 16APSK-3/4

Pilot : current max : 22 16APSK-8/9

Frame length : Short

DVB S2 Mode : QAM

DVB S2 Stream type : MPEG-TS

Roll off : 0.20

SNR : 14.7 dB

Input Power : -22 dBm

SpeedOf.Me, HTML5 Spe X

Telesat Crosspoll Test Res X

speedof.me

SpeedOf.Me is an HTML5 Internet speed test. No Flash or Java needed! It is the smartest and m mobile devices, as well as desktop computers.

SpeedOf.Me

Download: 90 kbps

Upload: 10 kbps

Latency: 5893 ms | Max Download: 0.09 | Max Upload: 0.01

07-11-2017 | Test Server: Miami 2

IP: 200.143.6.142

Speed: 0 kbps

Time: 19:37:32.600

Download Speed: 90 kbps

Upload Speed: 10 kbps

Click 'Share' to share this result

Test Again

Share

Test Complete.

Like it? Spread the word:

API

About

How It Works

Copyright © 2011-2016 S

SatLink VSAT

10.29.52.57/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

SatLink 2000

Software Version

16.0.1.57

LAN MAC Address

00:20:0e:10:5c:d8

DVB MAC Address

00:20:0e:10:5c:d8

System Up Time

0 days, 00:04:36

CPU Load

20%

System Name

VIVO-PER-28007263-SE

System Contact

System Location

ITABA/IANA/SE

ODU Serial Number

104804040203090209610000

ODU HW Version

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

