


# **TERMO DE ACEITE TÉCNICO**

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogerio Momi Frias Cliente: VIVO

Empresa VSAT-ID

EMC Brasil VIVO-PER-23230053-CE Link kbps 256/128 Plataforma VSAT

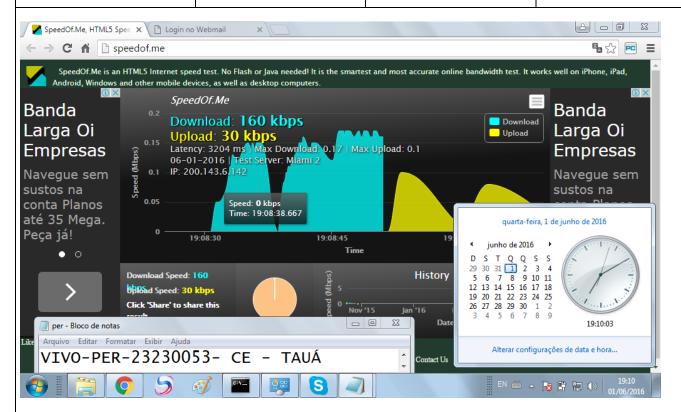

## Satellite (DVB) RX Configuration

Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName Name Enable

\* 0 0 9.320000 12.055825 DVB-S2 102 0 0.0 E Yes

### Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GloballP@Telstar-14R

Frequency : 12.055704 GHz Symbol Rate : 9.320008 Msps

- receiving : 1 QPSK-1/4 - current max : 16 8PSK-8/9

Pilot : On

S2 ModCod

Frame length : Short DVB S2 Mode : ACM

DVB S2 Stream type: MPEG-TS

Roll off : 0.20 SNR : 12.5 dB Input Power : -25 dBm

#### Satellite (DVB) TX Configuration

-----

Auto start : Enabled IDU Output Power : -22 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 34.6 dBm : 45.5 dBW EIRP

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression: None

### Satellite (DVB) Transmitter Status

State : On (DVB-RCS) IDU Output Power : -22.6 dBm ODU Output Power : 34.4 dBm EIRP : 45.3 dBW : 11.0 dB Es/No Header Compression: Disabled

Timing correction : -140 us (260543 us)

Frequency correction: 20 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=770 ms 64 bytes from 8.8.8.8: time=720 ms 64 bytes from 8.8.8.8: time=710 ms 64 bytes from 8.8.8.8: time=700 ms 64 bytes from 8.8.8.8: time=750 ms

--- ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 700/720/770 ms