

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31022063-MG

Link kbps
256k/128k

Plataforma
VSAT

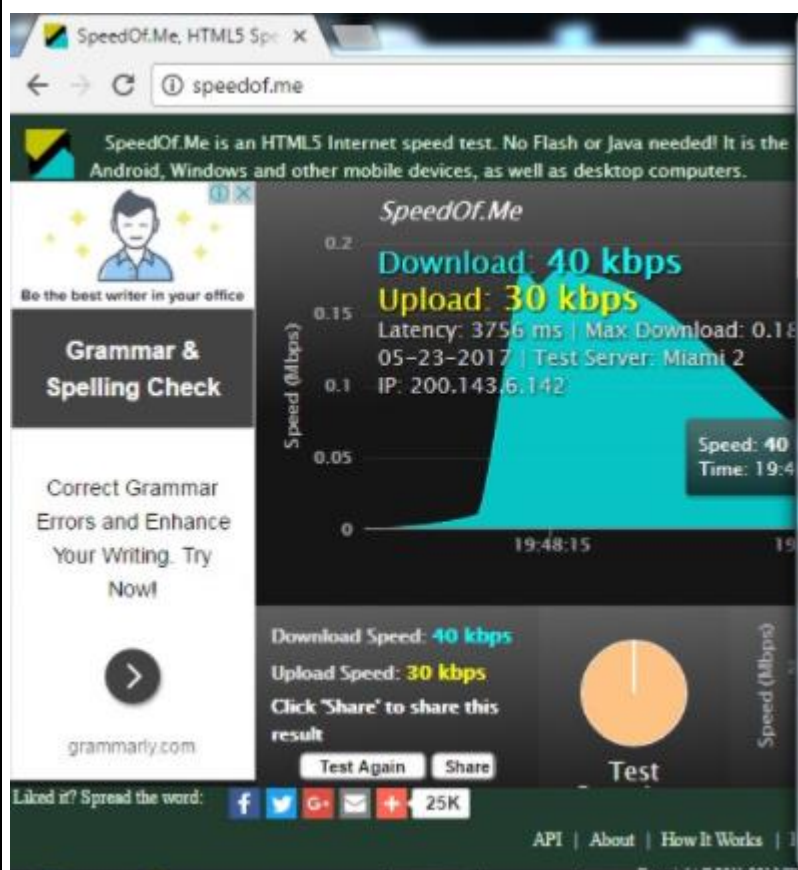

SatLink VSAT x Roundcube Webmail x

10.47.8.65/wmi/dwp/index_page.dwp



SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:7d:0b
DVB MAC Address	00:20:0e:10:7d:0b
System Up Time	0 days, 00:21:35
CPU Load	20%
System Name	VIVO-PER-35660536-SP
System Contact	
System Location	Socorro-SP
ODU Serial Number	104804040203080508620000

You are logged in as root (1)

© Copyright 2006-2014 STM Group. All Rights Reserved.

SatLink VSAT x (100) Roundcube Webmail x

10.47.8.65/wmi/dwp/index_page.dwp



SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:7d:0b
DVB MAC Address	00:20:0e:10:7d:0b
System Up Time	0 days, 00:21:35
CPU Load	20%
System Name	VIVO-PER-35660536-SP
System Contact	
System Location	Socorro-SP
ODU Serial Number	104804040203080508620000

You are logged in as root (1)

© Copyright 2006-2014 STM Group. All Rights Reserved.

```
cs. Telnet 10.47.8.65

Satellite (DVB) Transmitter Status
-----
State : On (DVB-RCS2)
IDU Output Power : -17.2 dBm
ODU Output Power : 32.7 dBm
EIRP : 46.0 dBW
Es/No : 12.5 dB
Header Compression : Disabled
Timing correction : 6 us (255361 us)
Frequency correction: 10 Hz
#
Satellite (DVB) RX Configuration
-----
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx Pri SynbRate[Mbps] Freq[GHz] Mode PopId SatId Pos
Name Enable
* 0 0 15.000000 12.059000 DVB-S2 102 0 0.0
Yes
1 1 9.320000 12.055825 DVB-S2 4 0 0.0
Yes

Satellite (DVB) Receiver Status
-----
Rx State : On
DVB State : Forward link up
Network : 1326 Ti4R Bean
Frequency : 12.059201 GHz
Symbol Rate : 14.999033 Mbps
S2 ModCod
- receiving : 7 QPSK-3/4
- current max : 18 16APSK-2/3
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 12.5 dB
Input Power : -20 dBm
```