TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogério Momi Frias
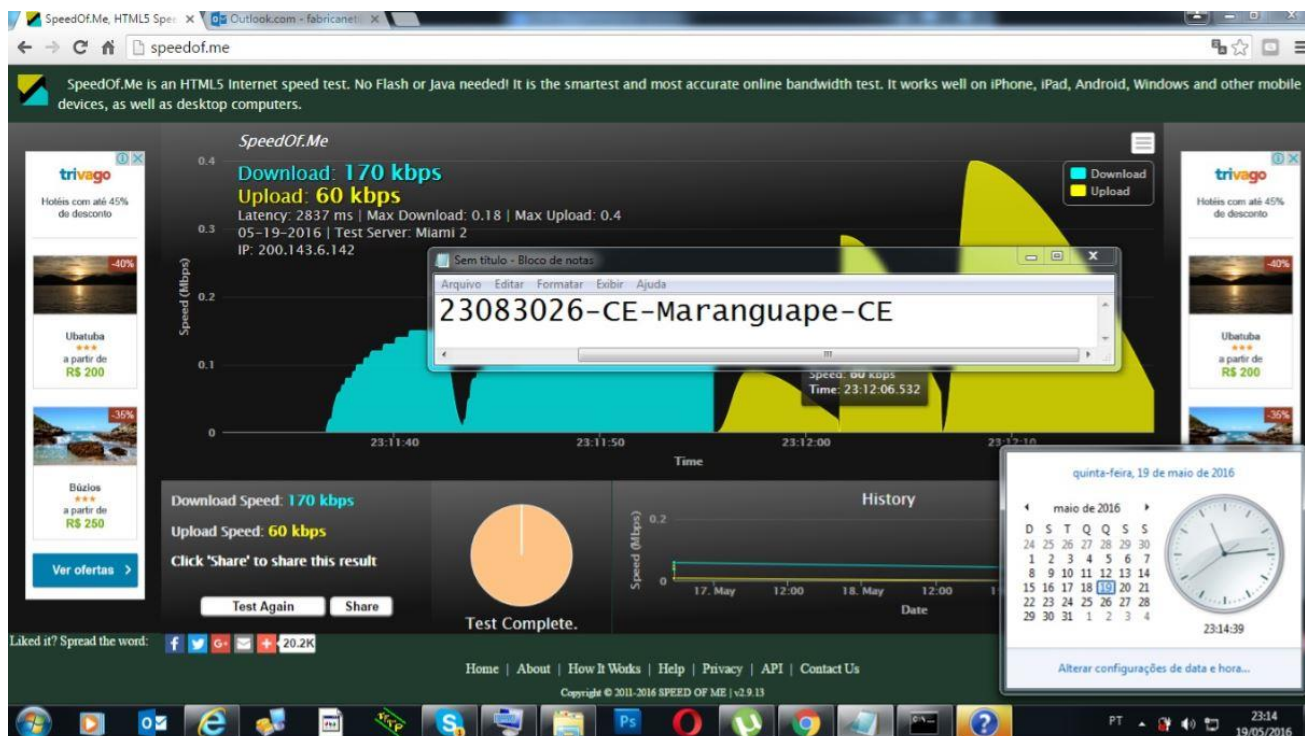
Cliente: VIVO

Empresa	VSAT-ID	Link kbps	Plataforma
EMC Brasil	VIVO-PER-23083026 -CE	256/128	VSAT

Satellite (DVB) RX Configuration

Auto start   : Enabled
Max Traffic MODCOD   : 23   16APSK-9/10
RX watchdog   : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode   PopId SatId Pos SatName   Name   Enable
* 0 0   9.320000   12.055825 DVB-S2 102   0   0.0 E   Yes

Satellite (DVB) Receiver Status

Rx State   : On
DVB State   : Forward link up
Network   : 1326, GlobalIP@Telstar-14R
Frequency   : 12.056110 GHz
Symbol Rate   : 9.319976 Msps
S2 ModCod
   - receiving   : 1   QPSK-1/4
   - current max : 16   8PSK-8/9
Pilot   : On
Frame length   : Short
DVB S2 Mode   : ACM
DVB S2 Stream type : MPEG-TS
Roll off   : 0.20
SNR   : 12.5 dB
Input Power   : -30 dBm

```
Satellite (DVB) TX Configuration
-------------------------------
Auto start        : Enabled
IDU Output Power   : -20 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power    : 34.6 dBm
EIRP          : 45.5 dBW
Default CW Frequency: 14.125750 GHz
ATM mode         : VC-Mux
Header Compression  :  None


Satellite (DVB) Transmitter Status
-------------------------------
State          : On  (DVB-RCS)
IDU Output Power   : -21.3 dBm
ODU Output Power    : 34.6 dBm
EIRP          : 45.5 dBW
Es/No          : 11.9 dB
Header Compression  : Disabled
Timing correction   : -82 us (260847 us)
Frequency correction: -90 Hz


ping 8.8.8.8
64 bytes from 8.8.8.8: time=810 ms
64 bytes from 8.8.8.8: time=710 ms
64 bytes from 8.8.8.8: time=710 ms
64 bytes from 8.8.8.8: time=710 ms
64 bytes from 8.8.8.8: time=730 ms

---  ping statistics ---
5 packets transmitted, 5 received,  0.00 percent packet loss
rtt min/avg/max = 710/730/810 ms
```