

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31211079-MG

Link kbps
256k/128k

Plataforma
VSAT

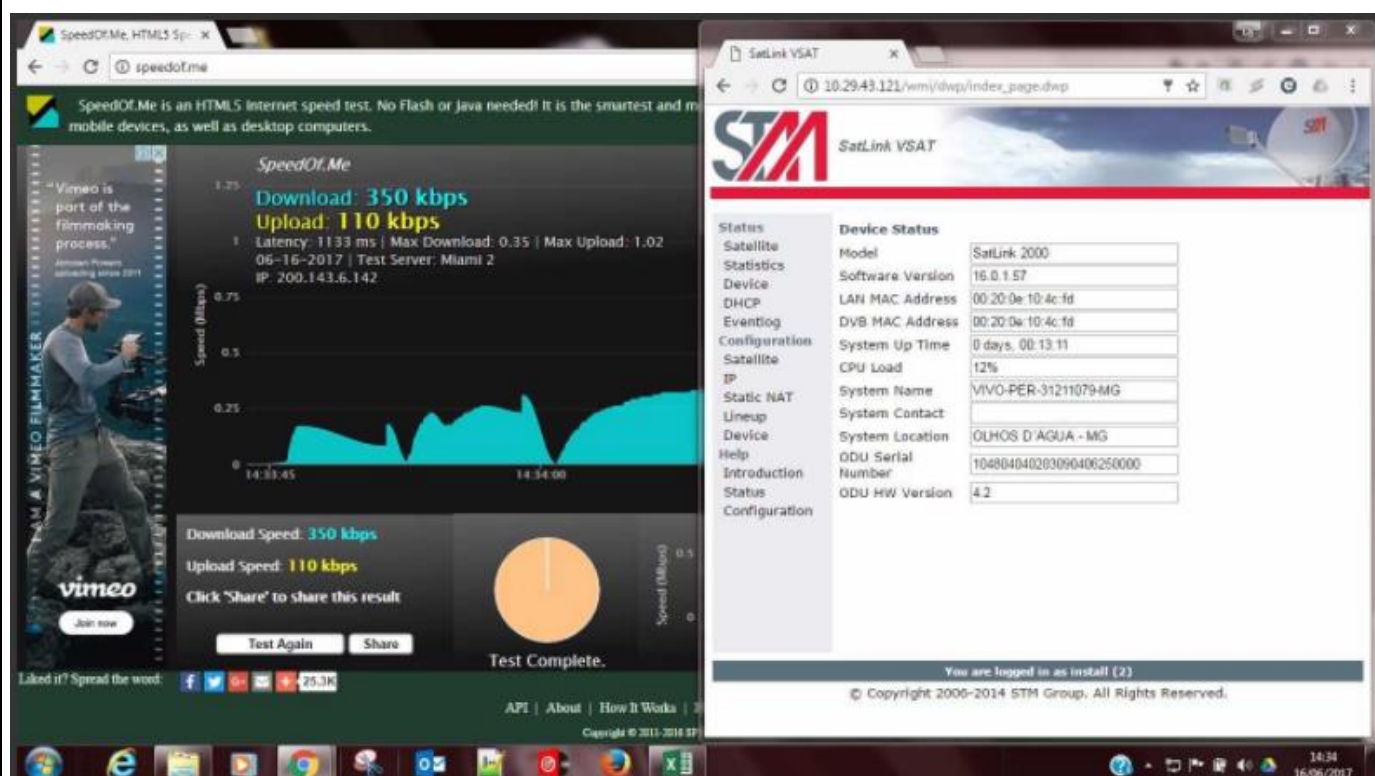

SatLink VSAT

10.29.43.121/wmi/dwp/index_page.dwp

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:4c:fd
DVB MAC Address	00:20:0e:10:4c:fd
System Up Time	0 days, 00:13:11
CPU Load	12%
System Name	VIVO-PER-31211079-MG
System Contact	
System Location	OLHOS D'AGUA - MG
ODU Serial Number	104804040203090406250000
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Tracer 10.29.43.121

Main board ID 120025, Revision RS.2
SU ID 120208, Revision 16.0.1 Build 59

Satellite <DVB> TX Configuration

Auto start: Enabled
IDU Output Power: -20 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power: 22.7 dBm
EIRP: 46.0 dBW
Default CW Frequency: 14.125000 GHz
B1T mode: QC-Max
Header Compression: None

Satellite <DVB> Transmitter Status

State: On (DVB-HCS2)
IDU Output Power: -17.2 dBm
ODU Output Power: 22.6 dBm
EIRP: 45.9 dBW
Ez/No: 12.5 dB
Header Compression: Disabled
Timing correction: -82 us (254718 us)
Frequency correction: -68 Hz

Satellite <DVB> RX Configuration

Auto start: Enabled
Max Traffic ModCOD: 23 16APSK-9/10
RX watchdog: 15 minute

Idx	Pri	SynchRate(Mbps)	Freq(GHz)	Mode	PopId	SatId	Pos	SatName
0	0	15.000000	12.057000	DVB-S2 102	0	0.0	E	
1	1	9.320000	12.055825	DVB-S2 4	0	0.0	E	

Satellite <DVB> Receiver Status

Rx State: On
DVB State: Forward link up
Network: 1326, T148 Beam
Frequency: 12.055824 GHz
Symbol Rate: 14.777775 Mbps
S2 ModCod: 13 8PSK-2/3
- receiving: 13 8PSK-2/3
- current max: 19 16APSK-3/4
Pilot: On
Preamble length: Short
DVB S2 Mode: ACM
DVB S2 Stream type: MPEG-TS
Roll off: 0.28
SNR: 12.9 dB
Input Power: -27 dBm

14:37
16/06/2017

SatLink VSAT

SpeedOfMe HTML5 Sc...

10.29.43.121/wmi/dwp/index_page.dwp

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:4c:fd
DVB MAC Address	00:20:0e:10:4c:fd
System Up Time	0 days, 00:13:11
CPU Load	12%
System Name	VIVO-PER-31211079-MG
System Contact	
System Location	OLHOS D'AGUA - MG
ODU Serial Number	104804040203090406250000
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe

Resposta de 8.8.8.8: bytes=32 tempo=566ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=546ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=736ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1247ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1767ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=762ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1081ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=752ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1506ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=676ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=641ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1544ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=2094ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1317ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=833ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1231ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1077ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1420ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=776ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1544ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1112ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1076ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1047ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1081ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1457ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1453ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1380ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1777ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=1419ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=773ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=538ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=651ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=679ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=772ms TTL=64
Resposta de 8.8.8.8: bytes=32 tempo=682ms TTL=64

Estatísticas de Ping para 8.8.8.8:
Pacotes: Enviados = 179, Recebidos = 179, Perdidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 553ms, Máximo = 2207ms, Média = 1006ms
Control-C
C:\Users\DJTernadeiro>arp -a

Interface	10.29.43.122	---	Chc
Endereço IP	10.29.43.122	00-20-0e-10-4c-fd	dinâmico
	10.29.43.127	ff-ff-ff-ff-ff-ff	estático
	224.0.0.251	01-00-5e-00-00-fb	estático
	224.0.0.252	01-00-5e-00-00-fc	estático
	239.255.255.250	01-00-5e-7f-ff-fa	estático
	255.255.255.255	ff-ff-ff-ff-ff-ff	estático

C:\Users\DJTernadeiro>

14:39
16/06/2017