

# TERMO DE ACEITE TÉCNICO

**Solicitante:** VIVO- Projeto Escolas Rurais

**NOC/Operador:** Guilherme Cunha


**Cliente:** VIVO


**Empresa**  
EMC Brasil

**VSAT-ID**  
VIVO-PER-28020715-SE

**Link kbps**  
256k/128k

**Plataforma**  
VSAT

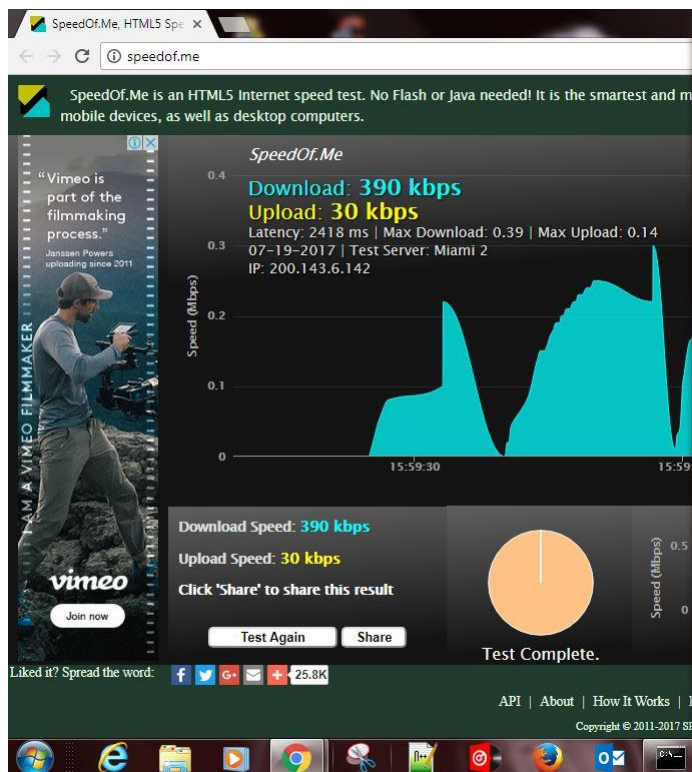

SatLink VSAT																							
10.29.54.121/wmi/dwp/index_page.dwp																							
 <b>SatLink VSAT</b>																							
<b>Status</b> Satellite Statistics Device DHCP Eventlog Configuration Satellite IP Static NAT Lineup Device Help Introduction Status Configuration	<b>Device Status</b> <table border="1"> <tr> <td>Model</td> <td>SatLink 2000</td> </tr> <tr> <td>Software Version</td> <td>16.0.1.57</td> </tr> <tr> <td>LAN MAC Address</td> <td>00:20:0e:10:4f:a5</td> </tr> <tr> <td>DVB MAC Address</td> <td>00:20:0e:10:4f:a5</td> </tr> <tr> <td>System Up Time</td> <td>0 days, 00:27:14</td> </tr> <tr> <td>CPU Load</td> <td>19%</td> </tr> <tr> <td>System Name</td> <td>VIVO-PER-28020715-PI</td> </tr> <tr> <td>System Contact</td> <td></td> </tr> <tr> <td>System Location</td> <td>Nossa Senhora do Socorro - SE</td> </tr> <tr> <td>ODU Serial Number</td> <td>104804040203080705710000</td> </tr> <tr> <td>ODU HW Version</td> <td>4.2</td> </tr> </table>	Model	SatLink 2000	Software Version	16.0.1.57	LAN MAC Address	00:20:0e:10:4f:a5	DVB MAC Address	00:20:0e:10:4f:a5	System Up Time	0 days, 00:27:14	CPU Load	19%	System Name	VIVO-PER-28020715-PI	System Contact		System Location	Nossa Senhora do Socorro - SE	ODU Serial Number	104804040203080705710000	ODU HW Version	4.2
Model	SatLink 2000																						
Software Version	16.0.1.57																						
LAN MAC Address	00:20:0e:10:4f:a5																						
DVB MAC Address	00:20:0e:10:4f:a5																						
System Up Time	0 days, 00:27:14																						
CPU Load	19%																						
System Name	VIVO-PER-28020715-PI																						
System Contact																							
System Location	Nossa Senhora do Socorro - SE																						
ODU Serial Number	104804040203080705710000																						
ODU HW Version	4.2																						
You are logged in as install (2) © Copyright 2006-2014 STM Group. All Rights Reserved.																							

SatLink VSAT																							
10.29.54.121/wmi/dwp/index_page.dwp																							
 <b>SatLink VSAT</b>																							
<b>Status</b> Satellite Statistics Device DHCP Eventlog Configuration Satellite IP Static NAT Lineup Device Help Introduction Status Configuration	<b>Device Status</b> <table border="1"> <tr> <td>Model</td> <td>SatLink 2000</td> </tr> <tr> <td>Software Version</td> <td>16.0.1.57</td> </tr> <tr> <td>LAN MAC Address</td> <td>00:20:0e:10:4f:a5</td> </tr> <tr> <td>DVB MAC Address</td> <td>00:20:0e:10:4f:a5</td> </tr> <tr> <td>System Up Time</td> <td>0 days, 00:19:09</td> </tr> <tr> <td>CPU Load</td> <td>19%</td> </tr> <tr> <td>System Name</td> <td>VIVO-PER-28020715-PI</td> </tr> <tr> <td>System Contact</td> <td></td> </tr> <tr> <td>System Location</td> <td>Nossa Senhora do Socorro - SE</td> </tr> <tr> <td>ODU Serial Number</td> <td>104804040203080705710000</td> </tr> <tr> <td>ODU HW Version</td> <td>4.2</td> </tr> </table>	Model	SatLink 2000	Software Version	16.0.1.57	LAN MAC Address	00:20:0e:10:4f:a5	DVB MAC Address	00:20:0e:10:4f:a5	System Up Time	0 days, 00:19:09	CPU Load	19%	System Name	VIVO-PER-28020715-PI	System Contact		System Location	Nossa Senhora do Socorro - SE	ODU Serial Number	104804040203080705710000	ODU HW Version	4.2
Model	SatLink 2000																						
Software Version	16.0.1.57																						
LAN MAC Address	00:20:0e:10:4f:a5																						
DVB MAC Address	00:20:0e:10:4f:a5																						
System Up Time	0 days, 00:19:09																						
CPU Load	19%																						
System Name	VIVO-PER-28020715-PI																						
System Contact																							
System Location	Nossa Senhora do Socorro - SE																						
ODU Serial Number	104804040203080705710000																						
ODU HW Version	4.2																						
You are logged in as install (2) © Copyright 2006-2014 STM Group. All Rights Reserved.																							

Telnet 10.29.54.121	
<pre> # Satellite &lt;DVB&gt; TX Configuration Auto start      : Enabled IDU Output Power : -17 dBm IDU Max Output Power : 0.0 dBm ODU Output Power : 33.7 dBm EIRP            : 47.0 dBW Default CW Frequency: 0.000000 GHz RTM mode        : UC-Mux Header Compression : None  Satellite &lt;DVB&gt; Transmitter Status State           : On &lt;DVB-RCS2&gt; IDU Output Power : -17.5 dBm ODU Output Power : 33.7 dBm EIRP            : 47.0 dBW Es/No           : 13.0 dB Header Compression : Disabled Timing correction : -30 us &lt;250984 us&gt; Frequency correction: -20 Hz  Satellite &lt;DVB&gt; RX Configuration Auto start      : Enabled Max Traffic MODCOD : 23 16APSK-9/10 RX watchdog     : 15 minute  Idx Pri SymbRate [Mbps] Freq [GHz] Mode PopId SatId Pos SatName * 0 0 25.333333 12.050000 DVB-S2 102 0 0.0 E 1 1 15.000000 12.059000 DVB-S2 4 0 0.0 E  Satellite &lt;DVB&gt; Receiver Status Rx State        : On DVB State       : Forward link up Network         : 1326- 1148 Beam Frequency       : 12.050192 GHz Symbol Rate     : 25.333272 Mbps S2 ModCod       : - receiving     : 22 16APSK-8/9 - current max   : 22 16APSK-8/9 Pilot           : On Frame length    : Short DVB S2 Mode     : ACM DVB S2 Stream type : MPEG-TS Roll off        : 0.20 SNR             : 15.2 dB Input Power     : -21 dBm # </pre>	

SatLink VSAT

10.29.54.121/wmi/dwp/index\_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:4f:a5

00:20:0e:10:4f:a5

0 days, 00:19:09

19%

VIVO-PER-28020715-PI

Nossa Senhora do Socorro - SE

104804040203080705710000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe

Resposta de 8.8.8.8: bytes=32 tempo=836ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=915ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=643ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=742ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=810ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=768ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=614ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=693ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=761ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=614ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=560ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=642ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=713ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=805ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=879ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=599ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=694ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=765ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=807ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=907ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=624ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=693ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=786ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=864ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=588ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=664ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=752ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=843ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=761ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=591ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=670ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=718ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=796ms TTL=44

Estadísticas do Ping para 8.8.8.8:

Pacotes: Enviados = 52, Recebidos = 52, Perdidos = 0 (0% de perda).

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 560ms, Máximo = 1575ms, Média = 765ms

Control-C

^C

C:\Users\DjTornados>arp -a

Interface: 10.29.54.122 --- 0xb

Endereço IP

Endereço físico

Tipo

10.29.54.121

00-20-0e-10-4f-a5

dinâmico

10.29.54.127

ff-ff-ff-ff-ff-ff

estático

224.0.0.2

01-00-5e-00-00-02

estático

224.0.0.22

01-00-5e-00-00-16

estático

224.0.0.251

01-00-5e-00-00-fb

estático

224.0.0.252

01-00-5e-00-00-fc

estático

224.0.1.60

01-00-5e-00-01-3c

estático

239.255.255.250

01-00-5e-7f-ff-fa

estático

255.255.255.255

ff-ff-ff-ff-ff-ff

estático

C:\Users\DjTornados>

15:56

19/07/2017