

# TERMO DE ACEITE TÉCNICO

**Solicitante:** VIVO- Projeto Escolas Rurais

**NOC/Operador:** Wallace Teixeira


**Cliente:** Vivo

**Empresa**  
EMC Brasil

**VSAT-ID**  
VIVO-PER-31082775-MG


**Link kbps**  
256K/128K

**Plataforma**  
VSAT

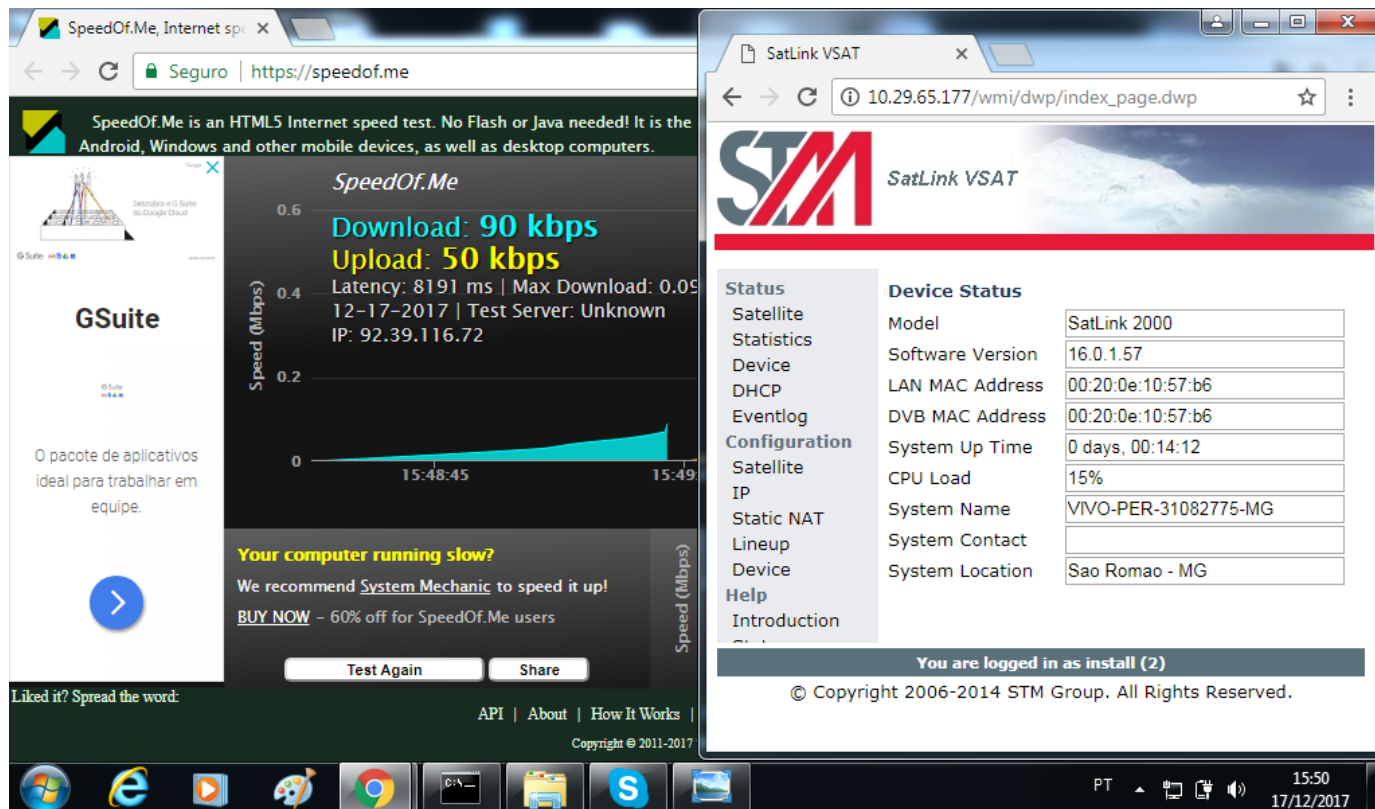

SatLink VSAT

10.29.65.177/wmi/dwp/index\_page.dwp



SatLink VSAT

**Status**  
Satellite  
Statistics  
Device  
DHCP  
Eventlog  
**Configuration**  
Satellite  
IP  
Static NAT  
Lineup  
Device  
**Help**  
Introduction  
Status  
Configuration

**Device Status**

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:57:b6
DVB MAC Address	00:20:0e:10:57:b6
System Up Time	0 days, 00:14:12
CPU Load	15%
System Name	VIVO-PER-31082775-MG
System Contact	
System Location	Sao Romao - MG

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved

Telnet 10.29.65.177

Satellite <DUB> Transmitter Status

State : On <DUB-RCS2>  
IDU Output Power : -18.0 dBm  
Es/No : 14.0 dB  
Header Compression : Disabled  
Timing correction : -169 us <248512 us>  
Frequency correction: 150 Hz

#

Satellite <DUB> RX Configuration

Auto start : Enabled  
Max Traffic MODCOD : 23 16APSK-9/10  
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos
* 0	0	30.000000	12.050000	DUB-S2	102	0	0.0

Yes

Satellite <DUB> Receiver Status


Rx State : On  
DUB State : Forward link up  
Network : 1326, T14R Beam  
Frequency : 12.050013 GHz  
Symbol Rate : 30.000031 Msps  
S2 ModCod :  
- receiving : 7 QPSK-3/4  
- current max : 20 16APSK-4/5

Pilot : On  
Frame length : Short  
DUB S2 Mode : ACM  
DUB S2 Stream type : MPEG-TS  
Roll off : 0.20  
SNR : 13.9 dB  
Input Power : -31 dBm

#

SatLink VSAT

10.29.65.177/wmi/dwp/index\_page.dwp



SatLink VSAT

**Status**  
Satellite  
Statistics  
Device  
DHCP  
Eventlog  
**Configuration**  
Satellite  
IP  
Static NAT  
Lineup  
Device  
**Help**  
Introduction  
Status  
Configuration

**Device Status**

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:57:b6
DVB MAC Address	00:20:0e:10:57:b6
System Up Time	0 days, 00:14:12
CPU Load	15%
System Name	VIVO-PER-31082775-MG
System Contact	
System Location	Sao Romao - MG

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved

cmd - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=2133ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=2179ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=1371ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=1722ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=2119ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=838ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=1314ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=1768ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=2163ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=2447ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=1859ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=1542ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=1977ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=2167ms TTL=48  
Esgotado o tempo limite do pedido.  
Resposta de 8.8.8.8: bytes=32 tempo=1235ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=957ms TTL=48  
Resposta de 8.8.8.8: bytes=32 tempo=904ms TTL=48

Estatísticas do Ping para 8.8.8.8:  
Pacotes: Enviados = 186, Recebidos = 169, Perdidos = 17  
(perda),  
Aproximar um número redondo de vezes em milissegundos:  
Mínimo = 784ms, Máximo = 2881ms, Média = 1387ms

Control-C  
C:\Windows\System32>arp -a

Interface:	192.168.0.100	---	0xe
Endereço IP	Endereço físico	Tipo	
192.168.0.1	c8-3a-35-20-f7-d8	dinâmico	
192.168.0.255	ff-ff-ff-ff-ff-ff	estático	
224.0.0.2	01-00-5e-00-00-02	estático	
224.0.0.22	01-00-5e-00-00-16	estático	
224.0.0.251	01-00-5e-00-00-fb	estático	
224.0.0.252	01-00-5e-00-00-fc	estático	
239.255.255.250	01-00-5e-7f-ff-fa	estático	
239.255.255.253	01-00-5e-7f-ff-fd	estático	
255.255.255.255	ff-ff-ff-ff-ff-ff	estático	

C:\Windows\System32>