

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Cunha


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31235491-MG

Link kbps
256k/128k

Plataforma
VSAT

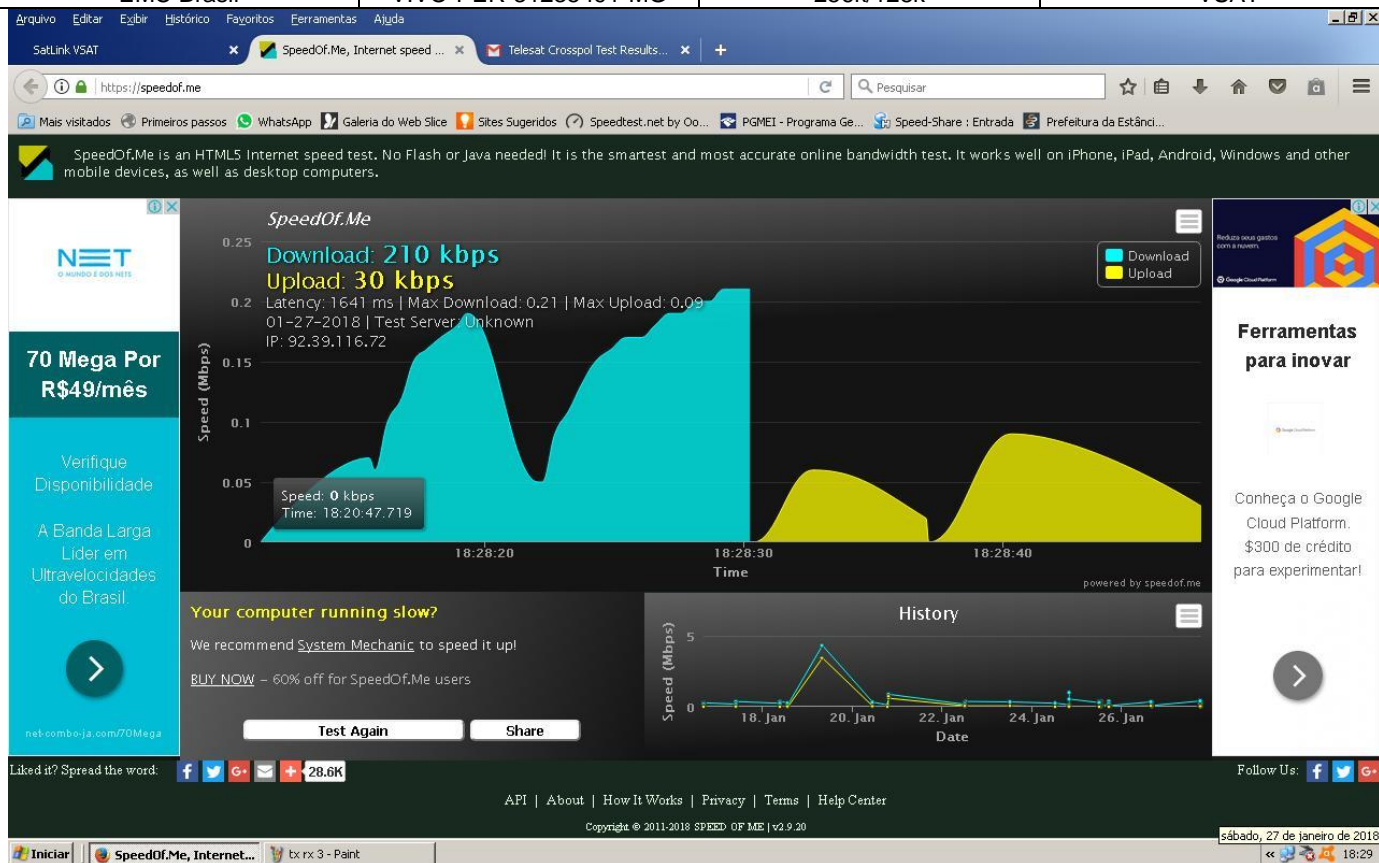

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT

10.29.3.1/wmi/dwp/index_page.dwp

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos (?) S

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:4a:a7
DVB MAC Address	00:20:0e:10:4a:a7
System Up Time	0 days, 00:09:56
CPU Load	21%
System Name	VIVO-PER-31235491-MG
System Contact	
System Location	Conceição do Para - MG
ODU Serial Number	104804040203090207790
ODU HW Version	4.2

Telnet 10.29.3.1

Satellite <DVB> Transmitter Status

State : On <DVB-RCS2>
IDU Output Power : -8.3 dBm
ODU Output Power : 33.2 dBm
EIRP : 46.2 dBW
Es/No : 12.5 dB
Header Compression : Disabled
Timing correction : -98 us <249434 us>
Frequency correction: 170 Hz

Satellite <DVB> RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName
Name		Enable						
* 0	0	30.000000	12.050000	DVB-S2	102	0	0.0 E	
1	1	25.333333	12.050000	DVB-S2	4	0	0.0 E	

Satellite <DVB> Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.049993 GHz
Symbol Rate : 30.000371 Msps
S2 ModCod :
- receiving : 12 8PSK-3/5
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 15.3 dB
Input Power : -25 dBm

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT

10.29.3.1/wmi/dwp/index_page.dwp

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos (?) S

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:57:34
DVB MAC Address	00:20:0e:10:57:34
System Up Time	0 days, 00:08:05
CPU Load	20%
System Name	VIVO-PER-31235491-MG
System Contact	
System Location	Conceição do Para - MG
ODU Serial Number	104804040203090207790000
ODU HW Version	4.2

Prompt de comando

```
Resposta de 8.8.8.8: bytes=32 tempo=879ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=976ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1060ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1047ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1091ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1135ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1049ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1033ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1080ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1116ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1031ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1105ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=916ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=790ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=869ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1010ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1355ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1180ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=972ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=956ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=804ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=869ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=961ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=828ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1103ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1122ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1077ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1020ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1082ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=953ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=829ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=901ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=971ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1019ms TTL=49

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 47, Recebidos = 0 (0% de perda),
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 790ms, Máximo = 2214ms, Média = 1031ms
Control-C
^C
C:\Documents and Settings\Administrador>
```

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT

10.29.3.1/wmi/dwp/index_page.dwp

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos (?) S

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:57:34
DVB MAC Address	00:20:0e:10:57:34
System Up Time	0 days, 00:08:05
CPU Load	20%
System Name	VIVO-PER-31235491-MG
System Contact	
System Location	Conceição do Para - MG
ODU Serial Number	104804040203090207790000
ODU HW Version	4.2

Prompt de comando

```
Resposta de 8.8.8.8: bytes=32 tempo=879ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=976ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1060ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1047ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1091ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1135ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1049ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1033ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1080ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1116ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1031ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1105ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=916ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=790ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=869ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1010ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1355ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1180ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=972ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=956ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=804ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=869ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=961ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=828ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1103ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1122ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1077ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1020ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1082ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=953ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=829ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=901ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=971ms TTL=49
Resposta de 8.8.8.8: bytes=32 tempo=1019ms TTL=49

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 47, Recebidos = 0 (0% de perda),
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 790ms, Máximo = 2214ms, Média = 1031ms
Control-C
^C
C:\Documents and Settings\Administrador>
```