

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Bruno Carvalho de Sá


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-23093927-CE

Link kbps
256/128

Plataforma
VSAT

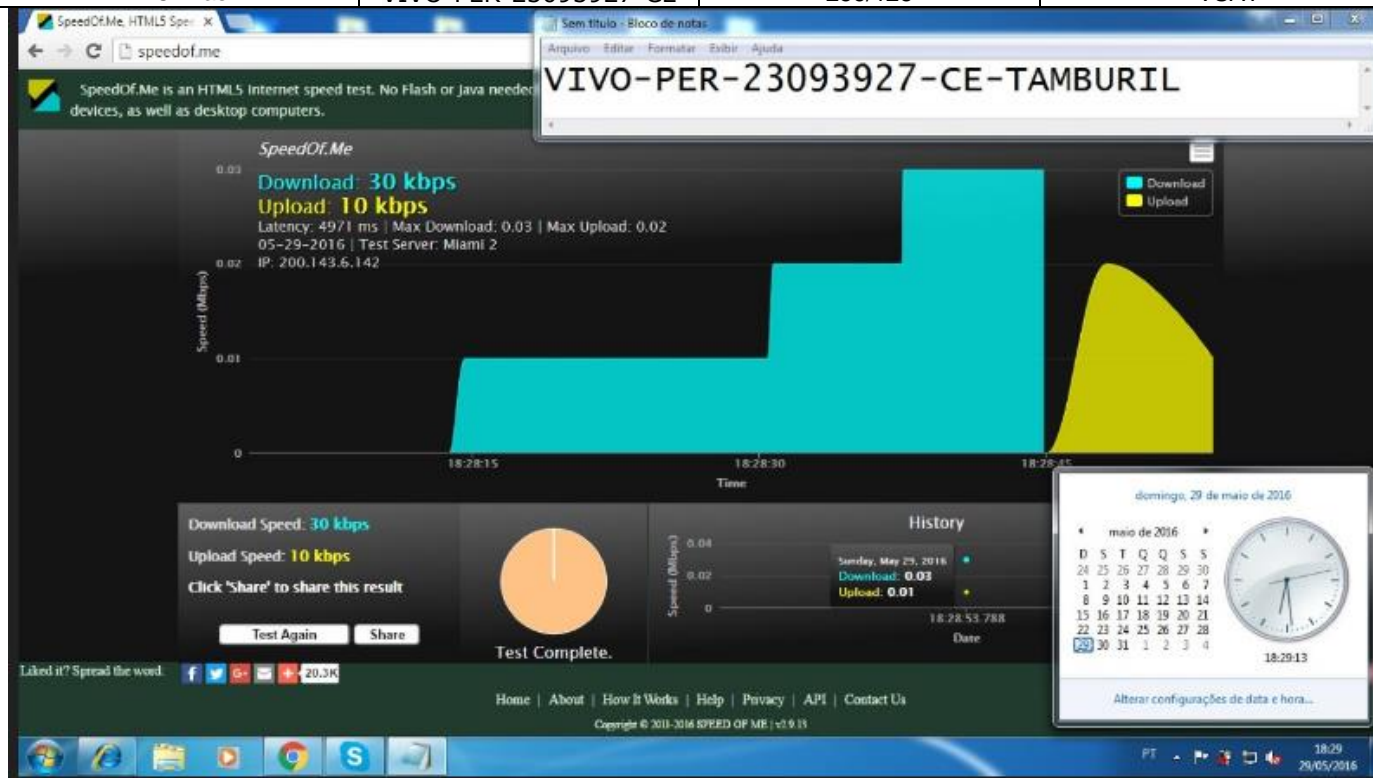

dvb tx show

Satellite (DVB) TX Configuration

```
-----
Auto start           : Enabled
IDU Output Power     : -22 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 35.6 dBm
EIRP                 : 46.5 dBW
Default CW Frequency: 14.125850 GHz
ATM mode             : VC-Mux
Header Compression   : None
```

Satellite (DVB) Transmitter Status

```
-----
State                : On (DVB-RCS)
IDU Output Power     : -21.7 dBm
ODU Output Power     : 35.5 dBm
EIRP                 : 46.4 dBW
Es/No                : 13.0 dB
Header Compression   : Disabled
Timing correction     : -138 us (260458 us)
Frequency correction : -40 Hz
# dvb rx show
```

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name
Enable									
* 0	0	9.320000	12.055825	DVB-S2	4	0	0.0 E		
Yes									

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1326, GlobalIP@Telstar-14R
Frequency : 12.056138 GHz
Symbol Rate : 9.320109 Msps
S2 ModCod
- receiving : 1 QPSK-1/4
- current max : 16 8PSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 13.3 dB
Input Power : -31 dBm

ping 8.8.8.8
64 bytes from 8.8.8.8: time=600 ms
64 bytes from 8.8.8.8: time=670 ms
64 bytes from 8.8.8.8: time=890 ms
64 bytes from 8.8.8.8: time=1680 ms
64 bytes from 8.8.8.8: time=900 ms

--- ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 600/940/1680 ms

