


# TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogério Momi Frias Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-23251263-CE256/128VSAT

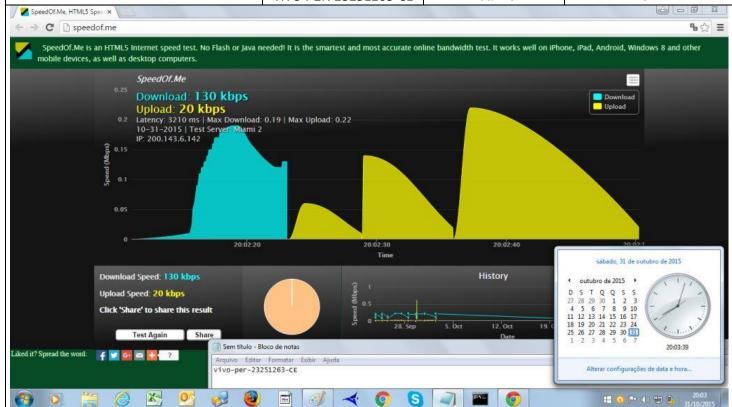

# Satellite (DVB) RX Configuration

-----

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable

\* 0 0 9.320000 12.055825 DVB-S2 4 Yes

## Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency: 12.055865 GHz Symbol Rate: 9.319928 Msps

S2 ModCod

- receiving : 14 8PSK-3/4 - current max : 23 16APSK-9/10

Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25
SNR : 14.0 dB
Input Power : -28 dBm

# Satellite (DVB) TX Configuration

-----

Auto start : Enabled
IDU Output Power : -30 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 34.7 dBm

EIRP : 48.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

## Satellite (DVB) Transmitter Status

-----

State : On (TDMA) IDU Output Power : -17.5 dBm ODU Output Power : 34.8 dBm

EIRP : 48.1 dBW Eb/No : 14.0 dB

Header Compression: Disabled Timing correction: -265 us (260977 us)

Frequency correction: -40 Hz

# ping 8.8.8.8

64 bytes from 8.8.8.8: time=1050 ms 64 bytes from 8.8.8.8: time=730 ms 64 bytes from 8.8.8.8: time=730 ms 64 bytes from 8.8.8.8: time=1280 ms 64 bytes from 8.8.8.8: time=570 ms

# --- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 570/870/1280 ms