


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogério Momi Frias Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-23111577-CE
 256/128
 VSAT

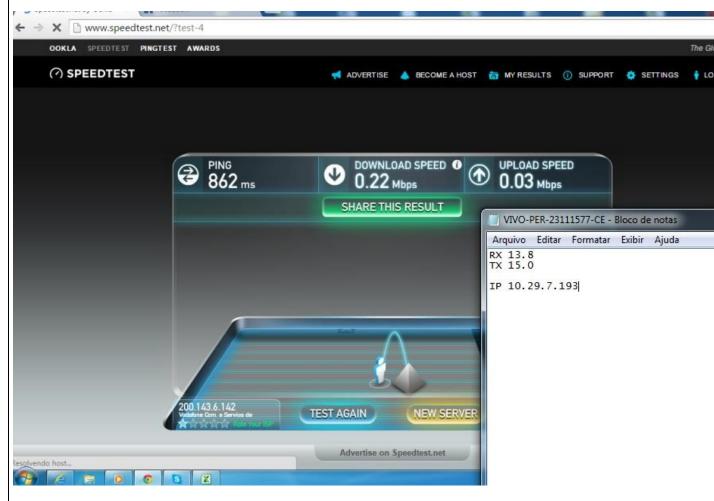

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable

* 0 0 9.320000 12.055825 DVB-S2 4 Yes 1 1 0.000000 0.000000 DVB-S2 2 Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency: 12.055672 GHz Symbol Rate: 9.319945 Msps

S2 ModCod

- receiving : 1 QPSK-1/4 - current max : 23 16APSK-9/10 Pilot : On

Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25
SNR : 13.8 dB
Input Power : -26 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled
IDU Output Power : -30 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 33.7 dBm

EIRP : 47.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (TDMA)
IDU Output Power : -19.9 dBm
ODU Output Power : 33.8 dBm

EIRP : 47.1 dBW Eb/No : 14.5 dB

Header Compression: Disabled Timing correction: -113 us (260745 us)

Frequency correction: -320 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=730 ms 64 bytes from 8.8.8.8: time=730 ms 64 bytes from 8.8.8.8: time=710 ms 64 bytes from 8.8.8.8: time=550 ms 64 bytes from 8.8.8.8: time=830 ms

--- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss

rtt min/avg/max = 550/700/830 ms