


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Allan Santos Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-26062276-PE
 256k/128k
 VSAT

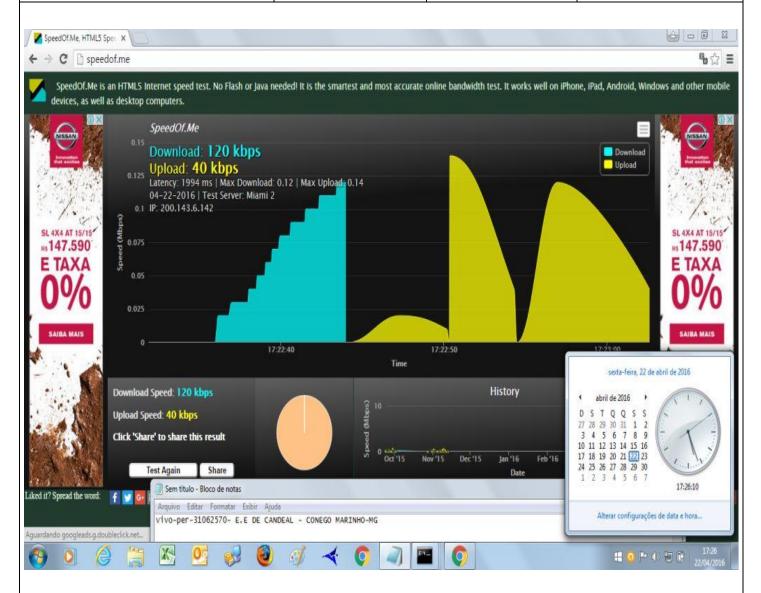

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -23 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power : 33.7 dBm

EIRP : 47.0 dBW

Default CW Frequency: 14.125750 GHz

ATM mode : VC-Mux Header Compression : None

```
Satellite (DVB) Transmitter Status
                   : On (DVB-RCS)
State
IDU Output Power : -22.9 dBm
ODU Output Power : 33.4 dBm
                   : 46.7 dBW
EIRP
                    : 12.0 dB
Es/No
Header Compression : Disabled
Timing correction : -156 us (260628 us)
Frequency correction: 250 Hz
# dvb rx show
Satellite (DVB) RX Configuration
-----
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute
Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName
                                                                                 Name
Enable
          9.320000 12.055825 DVB-S2 102 0 0.0 E
* 0 0
Yes
Satellite (DVB) Receiver Status
             : On
: Forward link up
: 1326, GlobalTPO
Rx State
DVB State
                   : 1326, GlobalIP@Telstar-14R
Network
Frequency : 12.055698 GHz
Symbol Rate : 9.320280 Msps
S2 ModCod
   - receiving : 15 8PSK-5/6
     - current max : 15 8PSK-5/6
Pilot
          : On
Frame length : Short DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR
                   : 11.0 dB
Input Power : -28 dBm
IP DVB 10.50.1.90/32
Ping desde o MGMT- Server ao IP de trafego e para o DVB.
Ping desde dentro da VSAT 8.8.8.8
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=860 ms
64 bytes from 8.8.8.8: time=720 ms
64 bytes from 8.8.8.8: time=720 ms
64 bytes from 8.8.8.8: time=710 ms
64 bytes from 8.8.8.8: time=520 ms
--- ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 520/700/860 ms
```