



# TERMO DE ACEITE TÉCNICO

Solicitante: ViVo

NOC/Operador: Alexandre Cruz

Cliente: VIVO


Empresa  
EMC Brasil

VSAT-ID

VIVO-PER-  
31146161  
-MG


Link kbps 256/128

Plataforma VSAT

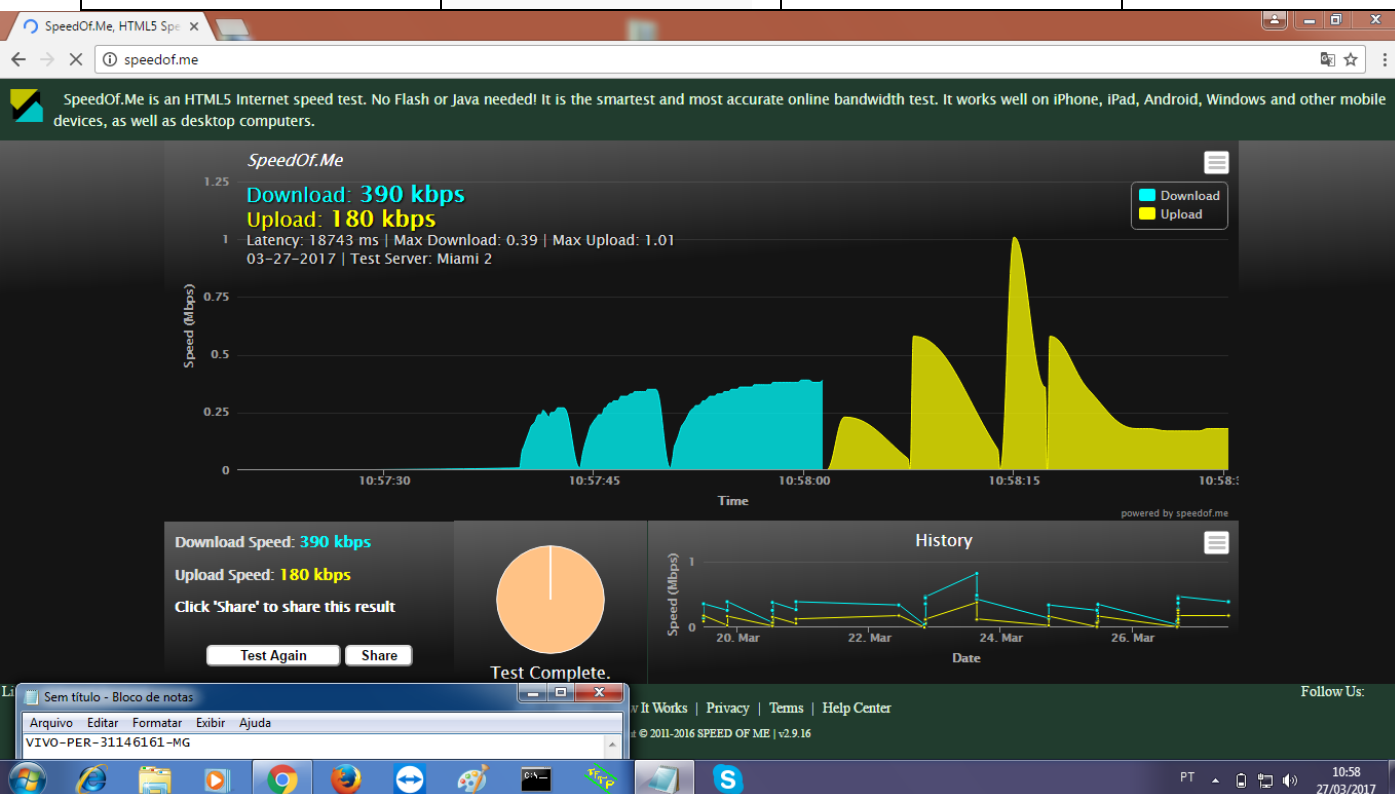

SatLink VSAT

10.29.33.225/wmi/dwp/index\_page.dwp



SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Co

BU

CV

ID

CV

Re

Rx

Telnet 10.29.33.225

Login: Password:  
SatLink 2000  
- Main board ID 120026, Revision R6.2  
- SW ID 120208, Revision 16.0.1 Build 57  
#  
Satellite <DUB> TX Configuration  
-----  
Auto start : Enabled  
IDU Output Power : -20 dBm  
IDU Max Output Power: 0.0 dBm  
Default CM Frequency: 0.000000 GHz  
ATM mode : UC-Mux  
Header Compression : None  
  
Satellite <DUB> Transmitter Status  
-----  
State : On <DUB-RGS2>  
IDU Output Power : -19.0 dBm  
Es/No : 14.0 dB  
Header Compression : Disabled  
Timing correction : -145 us <261689 us>  
Frequency correction: -240 Hz  
#

0

5

10

15


20

15.4

Rx Input Power [dBm]

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.



PT 10:53 27/03/2017