


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Henrique

Cliente: VIVO

Empresa VSAT-ID Link kbps Plataforma

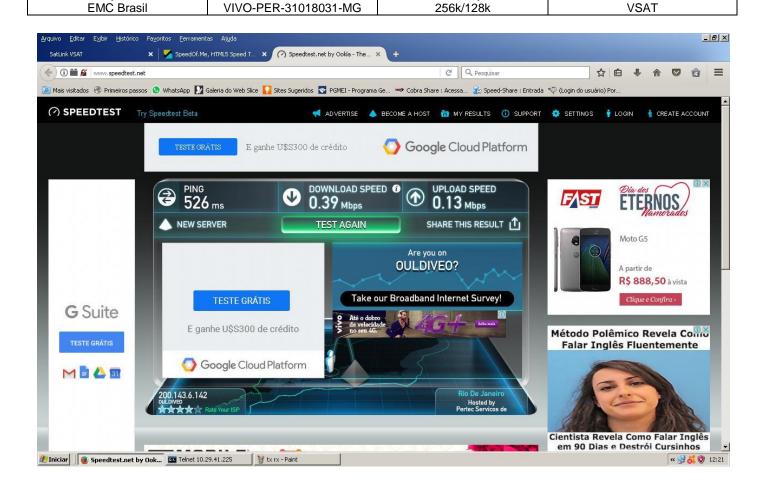

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -20 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power : 32.7 dBm

EIRP : 46.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS2)

IDU Output Power : -20.1 dBm

ODU Output Power : 32.8 dBm EIRP : 46.1 dl Es/No : 8.0 dB : 46.1 dBW Header Compression : Disabled

Timing correction : -63 us (255750 us)

Frequency correction: 10 Hz

dvb rx show

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Msps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName
Name		Enable						
* 0	0	15.000000	12.059000	DVB-S2	102	0	0.0 E	
Yes								
1	1	9.320000	12.055825	DVB-S2	4	0	0.0 E	
Yes								

Satellite (DVB) Receiver Status _____


Rx State : On

DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.058748 GHz
Symbol Rate : 15.000042 Msps

S2 ModCod

- receiving : 18 16APSK-2/3 - current max : 20 16APSK-4/5

Pilot : On
Frame length : Short
DVB S2 Mode : ACM DVB S2 Stream type : MPEG-TS Roll off : 0.20 SNR : 13.6 dB Input Power : -30 dBm

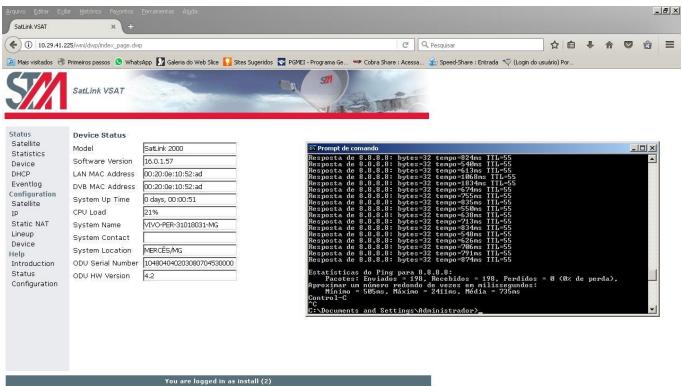

© Copyright 2006-2014 STM Group. All Rights Reserved.

