

TERMO DE ACEITE TÉCNICO

Solicitante: SESACRE

NOC/Operador: Leonardo Martins



Cliente: SESACRE

Empresa
EMC Brasil

VSAT-ID
SESACRE-SANTA_ROSA

Link kbps
2M/512k

Plataforma
VSAT

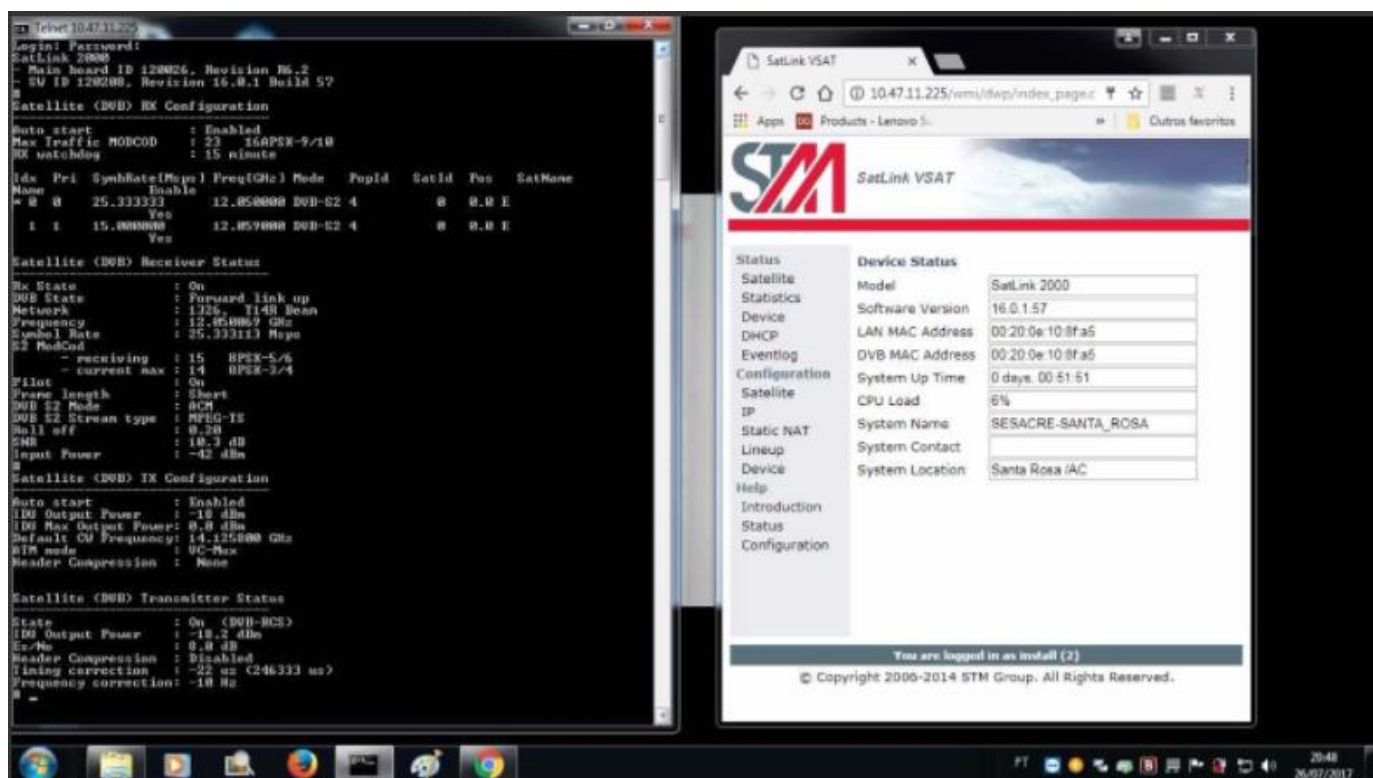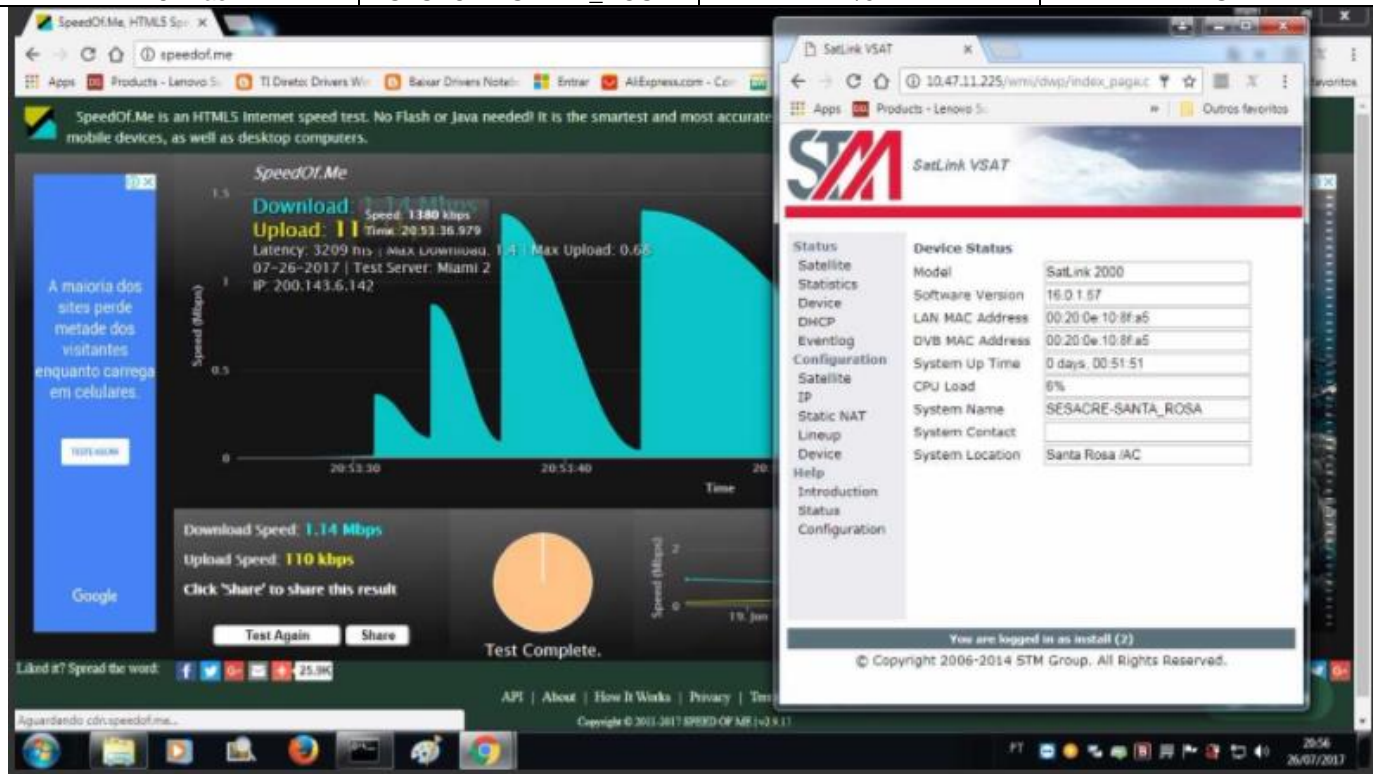

```

C:\Users\Gustavo>ping -n 32 10.47.11.225
Resposta de 0.0.0.0: hytex-32 tempo=570ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1104ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=790ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1175ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=914ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=662ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=585ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1002ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=744ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1229ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=790ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=570ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=721ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=657ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1319ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=925ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=736ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1148ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=752ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1223ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=736ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1306ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1667ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=742ms TTL=44
Resposta de 0.0.0.0: hytex-32 tempo=1261ms TTL=44
Resposta de 0.0.0.0:
Estadísticas de Ping para 0.0.0.0:
Facetas: Enviados = 336, Recibidos = 335, Perdidos = 1 (0% de
perda).
Aproximar un número redondo de veces en milisegundos:
Mínimo = 546ms, Máximo = 2470ms, Média = 1046ms
Control-C
C:\Users\Gustavo>arp -a

Interface: 10.47.11.226 --- 0x0
Endereço IP      Endereço físico  Tipo
10.47.11.225     00-20-0e-10-8f-a5  dinâmica
10.47.11.231     ff-ff-ff-ff-ff-ff  estático
224.0.0.2        01-00-5e-00-00-02  estático
224.0.0.22       01-00-5e-00-00-16  estático
224.0.0.251      01-00-5e-00-00-fb  estático
224.0.0.252      01-00-5e-00-00-fc  estático
239.255.255.250  01-00-5e-7f-ff-fa  estático
255.255.255.255  ff-ff-ff-ff-ff-ff  estático

Interface: 169.254.194.212 --- 0x15
Endereço IP      Endereço físico  Tipo
169.254.255.255  ff-ff-ff-ff-ff-ff  estático
224.0.0.2        01-00-5e-00-00-02  estático
224.0.0.22       01-00-5e-00-00-16  estático
224.0.0.251      01-00-5e-00-00-fb  estático
224.0.0.252      01-00-5e-00-00-fc  estático
239.255.255.250  01-00-5e-7f-ff-fa  estático
255.255.255.255  ff-ff-ff-ff-ff-ff  estático

C:\Users\Gustavo>

```

SatLink VSAT

10.47.11.225/wmi/dwp/index_page.c

Apps Products - Lenovo S...

Outros favoritos



SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00.20.0e.10.8f.a5
DVB MAC Address	00.20.0e.10.8f.a5
System Up Time	0 days, 00:51:51
CPU Load	6%
System Name	SESACRE-SANTA_ROSA
System Contact	
System Location	Santa Rosa /AC

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.