


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Allan Santos Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-25088351-PB
 256k/128k
 VSAT

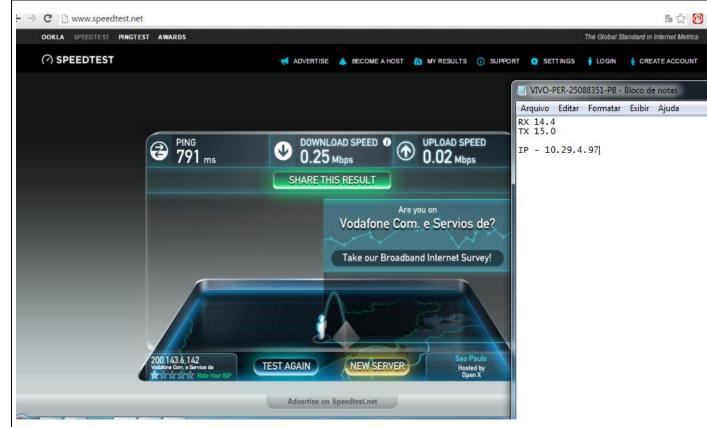

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -25 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 33.7 dBm EIRP : 47.0 dBW Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (TDMA)
IDU Output Power : -22.9 dBm
ODU Output Power : 33.7 dBm
EIRP : 47.0 dBW
Eb/No : 14.0 dB
Header Compression : Disabled

```
Timing correction : -53 us (262452 us)
Frequency correction: -280 Hz
# dvb rx show
Satellite (DVB) RX Configuration
_____
Auto start : Enabled 
Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)
                    : 15 minute
RX watchdog
Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 9.320000 12.055825 DVB-S2 4 Yes
Satellite (DVB) Receiver Status
            : On
: Forward link up
Rx State
               : 1326, GlobalIP@Telstar-14R
: 12.055894 GHz
: 9 310050
DVB State
Network
Frequency
Symbol Rate
S2 ModCod
   - receiving : 15 8PSK-5/6
- current max : 23 16APSK-9/10
: On
Frame length : Sho
DVB S2 Mode . ACM
                    : Short
                    : ACM
                    : 0.25
Roll off
SNR : 14.2 dB Input Power : -31 dBm
IP DVB 10.50.0.53/32
Ping desde o MGMT- Server ao IP de trafego e para o DVB.
Ping desde dentro da VSAT 8.8.8.8
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=580 ms
64 bytes from 8.8.8.8: time=650 ms
64 bytes from 8.8.8.8: time=770 ms
64 bytes from 8.8.8.8: time=530 ms
64 bytes from 8.8.8.8: time=560 ms
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
```

rtt min/avg/max = 530/610/770 ms