

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-27021777-AL

Link kbps
256k/128k

Plataforma
VSAT

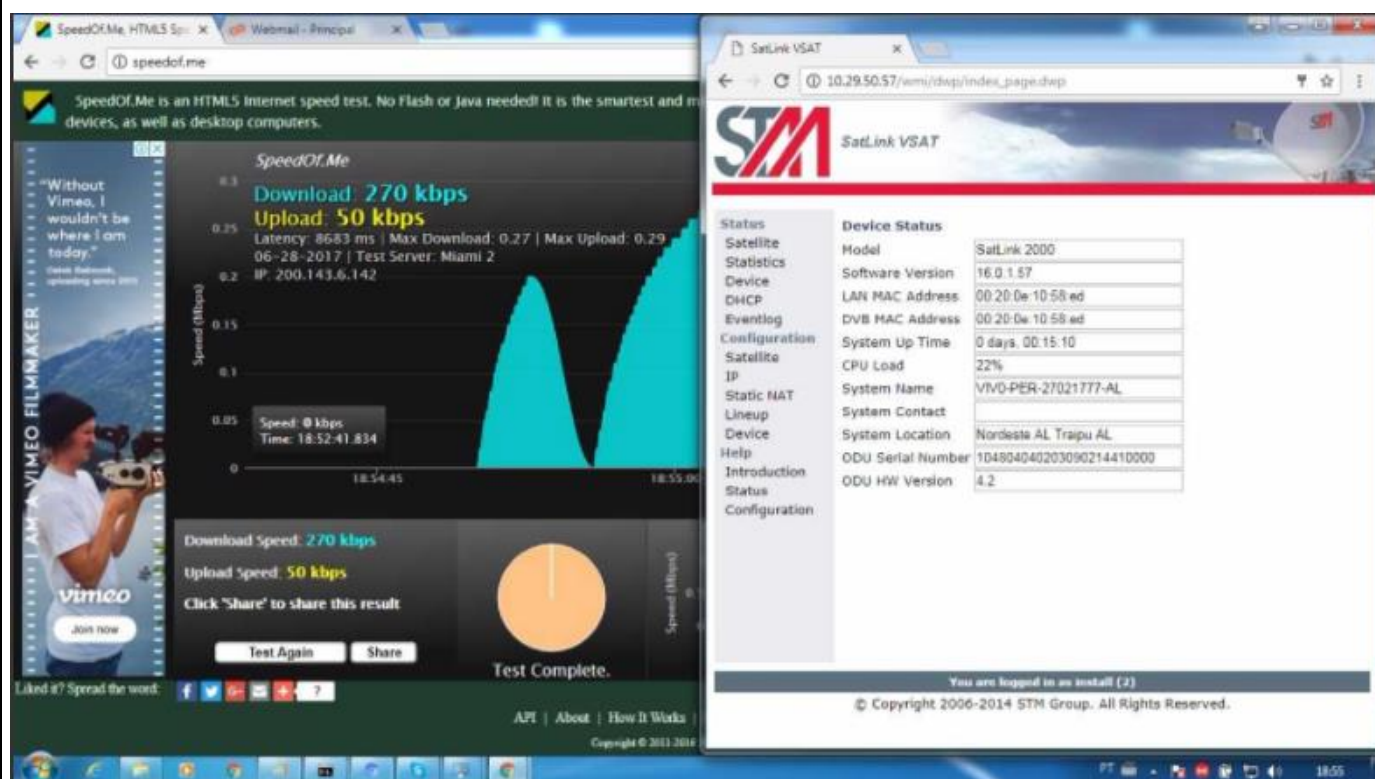

SatLink VSAT
SpeedOf.Me, HTML5 Sp...
10.29.50.57/ami/dwp/index_page.dwp
STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status
Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:58:ed
DVB MAC Address: 00:20:0e:10:58:ed
System Up Time: 0 days, 00:15:10
CPU Load: 22%
System Name: VIVO-PER-27021777-AL
System Contact:
System Location: Nordeste AL Traipu AL
ODU Serial Number: 104804040203090214410000
ODU HW Version: 4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Termin 10.29.50.57
Login: Password:
SatLink 2000
Main board ID 120026, Revision RS_2
SW ID 120200, Revision 16.0.1 Build 57
Satellite (DVB) TX Configuration
Auto start: Enabled
ISB Output Power: -15 dBm
ISB Max Output Power: 8.8 dBm
ODM Output Power: 32.7 dBm
EIRP: 46.0 dBm
Default ON Frequency: 8.000000 GHz
ATH mode: DC-Mux
Header Compression: None
Satellite (DVB) Transmitter Status
State: On (DVB-RC32)
ISB Output Power: -15.2 dBm
ODM Output Power: 32.5 dBm
EIRP: 45.0 dBm
Tx/Mx: 16.0 dB
Header Compression: Disabled
Fading correction: -11 us (255373 us)
Frequency correction: -18 Hz
Satellite (DVB) RX Configuration
Auto start: Enabled
Max Traffic M00C0B: 23 16APSR-9/10
RX watchdog: 15 minute
idx Pri SymbRate(Mbps) Freq(GHz) Mode PopId StatId Pos SatName
0 0 15.000000 Yes 12.859000 DVB-S2 102 0 0.0 E
Satellite (DVB) Receiver Status
Rx State: On
DVB State: Forward Link up
Network: 1326, T14R Buan
Frequency: 12.85900 GHz
Symbol Rate: 14.999738 Mbps
S2 ModCod:
receiving: 10 16APSR-2/3
current max: 22 16APSR-8/9
Pilot: On
Frame length: Short
DVB S2 Mode: HREG-TS
DVB S2 Stream type: 0.2B
Roll off: 14.9 dB
Input Power: -24 dBm

SatLink VSAT
SpeedOf.Me, HTML5 Sp...
10.29.50.57/ami/dwp/index_page.dwp
STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status
Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:58:ed
DVB MAC Address: 00:20:0e:10:58:ed
System Up Time: 0 days, 00:15:10
CPU Load: 22%
System Name: VIVO-PER-27021777-AL
System Contact:
System Location: Nordeste AL Traipu AL
ODU Serial Number: 104804040203090214410000
ODU HW Version: 4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

cmd - Attilio
Resposta de 0.0.0.0: bytes=32 tempo=76.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=85.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=66.3ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=63.7ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=71.4ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=79.5ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=87.1ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=59.2ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=76.2ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=103.5ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=223.4ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=71.6ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=79.2ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=86.7ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=94.7ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=66.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=72.7ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=82.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=88.9ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=61.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=69.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=76.3ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=85.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=61.1ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=64.3ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=73.2ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=79.4ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=87.0ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=61.9ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=67.2ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=75.3ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=83.1ms TTL=44
Estatísticas de Ping para 0.0.0.0:
Pacotes: Enviados = 69, Recebidos = 60, Perdidos = 1 Ctx de
segda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 56.1ms, Máximo = 306.6ms, Média = 97.9ms
Ctrl+C
C:\Windows\System32>arp -a
Interface: 10.29.50.50 --- Ach
Endereço IP Endereço físico Tipo
10.29.50.57 00-20-0e-10-58-ed dinâmico
10.29.50.63 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.22 01-00-5e-00-00-16 estático
224.0.0.251 01-00-5e-00-00-1a estático
224.0.0.252 01-00-5e-00-00-1c estático
224.0.0.253 01-00-5e-00-00-1d estático
224.170.217.5 01-00-5e-32-49-05 estático
239.192.152.143 01-00-5e-40-00-01 estático
239.255.255.250 01-00-5e-7f-ff-1a estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático
C:\Windows\System32>