

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-26070065-PE

Link kbps
256K/128K

Plataforma
VSAT

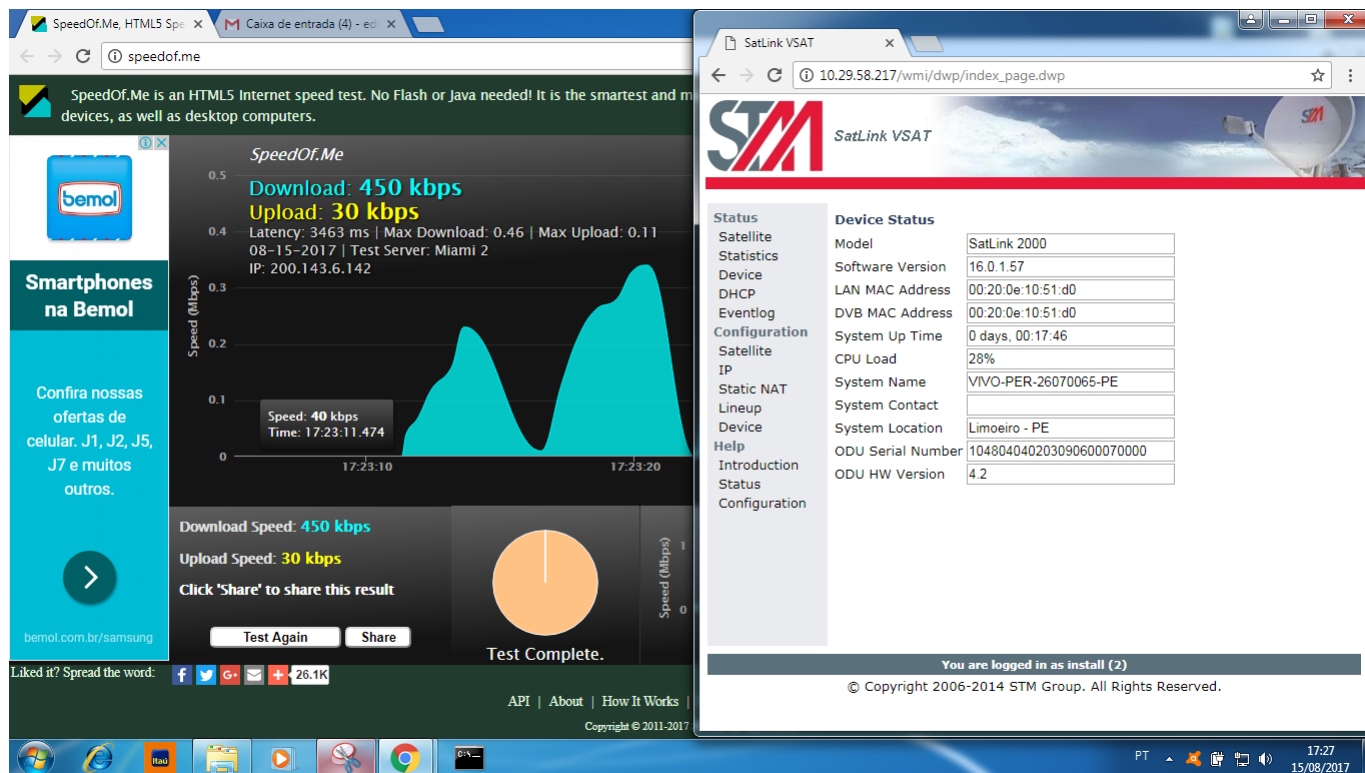

SatLink VSAT

10.29.58.217/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:51:d0

00:20:0e:10:51:d0

0 days, 00:27:09

21%

VIVO-PER-26070065-PE

Limoeiro - PE

104804040203090600070000

4.2

Telnet 10.29.58.217

Timing correction : -62 us (251292 us)
Frequency correction: -40 Hz

Satellite <DVB> TX Configuration
Auto start : Enabled
IDU Output Power : -28 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 32.7 dBm
EIRP : 46.0 dBW
Default CW Frequency: 9.600000 GHz
ATM mode : UC-Mux
Header Compression : None
Satellite <DVB> Transmitter Status
State : On <DVB-RCS2>
IDU Output Power : -15.1 dBm
ODU Output Power : 32.4 dBm
EIRP : 45.7 dBW
Es/No : 12.5 dB
Header Compression : Disabled
Timing correction : -62 us (251292 us)
Frequency correction: -40 Hz
Satellite <DVB> RX Configuration
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute
Idx Pri SynbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName
* 0 0 25.333333 Enable 12.050000 DVB-S2 102 0 0.0 E
1 1 15.000000 Yes 12.059000 DVB-S2 4 0 0.0 E
Yes
Satellite <DVB> Receiver Status
Rx State : On
DVB State : Forward link up
Network : 1326, I14R Beam
Frequency : 12.049827 GHz
Symbol Rate : 25.332913 Msps
S2 ModCod
- receiving : 19 16APSK-3/4
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 15.2 dB
Input Power : -27 dBm
#

SatLink VSAT

10.29.58.217/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:51:d0

00:20:0e:10:51:d0

0 days, 00:27:09

21%

VIVO-PER-26070065-PE

Limoeiro - PE

104804040203090600070000

4.2

CMD - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=1329ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2251ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2756ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2641ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2090ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2016ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1482ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=902ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1582ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2353ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1482ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=812ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=212ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=740ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=627ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=907ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2059ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1066ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=127ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=770ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1225ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1050ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2170ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=877ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1859ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=2156ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=701ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1350ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1547ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1009ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1708ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1708ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=940ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1732ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1798ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1076ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=722ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1147ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=716ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1155ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=718ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=706ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=879ms TTL=39
Resposta de 8.8.8.8: bytes=32 tempo=1305ms TTL=39
Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 98, Recebidos = 98, Perdidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 704ms, Máximo = 2756ms, Média = 1178ms
Control-C
C:\Windows\System32>