TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogerio Momi Frias   **Cliente: VIVO**
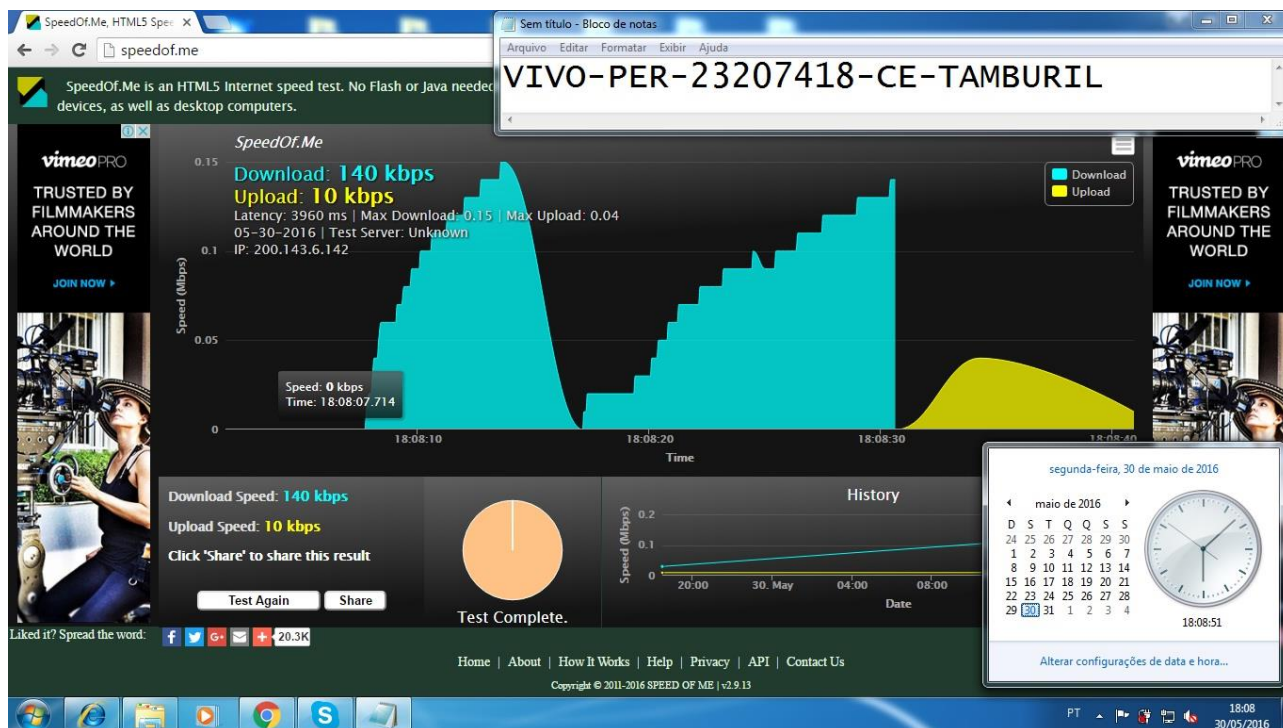
Empresa EMC Brasil	VSAT-ID VIVO-PER-23207418-CE	Link kbps 256/128	Plataforma VSAT

Satellite (DVB) RX Configuration

Auto start   : Enabled
Max Traffic MODCOD   : 23   16APSK-9/10
RX watchdog   : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode   PopId SatId Pos SatName
Name   Enable
* 0 0   9.320000   12.055825 DVB-S2 4   0   0.0 E
Yes

Satellite (DVB) Receiver Status

Rx State   : On
DVB State   : Forward link up
Network   : 1326, GlobalIP@Telstar-14R
Frequency   : 12.056030 GHz
Symbol Rate   : 9.320018 Msps
S2 ModCod
    - receiving   : 16   8PSK-8/9
    - current max : 16   8PSK-8/9
Pilot   : On
Frame length   : Short
DVB S2 Mode   : ACM
DVB S2 Stream type : MPEG-TS
Roll off   : 0.20
SNR   : 13.4 dB
Input Power   : -22 dBm

```
Satellite (DVB) TX Configuration
--------------------------------
Auto start        : Enabled
IDU Output Power    : -22 dBm
IDU Max Output Power: 0.0 dBM
ODU Output Power    : 34.6 dBm
EIRP          : 45.5 dBW
Default CW Frequency: 14.125750 GHz
ATM mode        : VC-Mux
Header Compression  :  None


Satellite (DVB) Transmitter Status
--------------------------------
State         : On  (DVB-RCS)
IDU Output Power    : -22.2 dBm
ODU Output Power    : 35.8 dBm
EIRP          : 45.7 dBW
Es/No         : 12.0 dB
Header Compression  : Disabled
Timing correction   : -150 us (260468 us)
Frequency correction: 10 Hz




ping 8.8.8.8
64 bytes from 8.8.8.8: time=790 ms
64 bytes from 8.8.8.8: time=720 ms
64 bytes from 8.8.8.8: time=700 ms
64 bytes from 8.8.8.8: time=720 ms
64 bytes from 8.8.8.8: time=710 ms

--- ping statistics ---
5 packets transmitted, 5 received,  0.00 percent packet loss
rtt min/avg/max = 700/720/790 ms
```