

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Alexandre Cruz


Cliente: VIVO

Empresa
EMC Brasil


VSAT-ID
VIVO-PER-27217663-AL

Link kbps
256K/128k

Plataforma VSAT

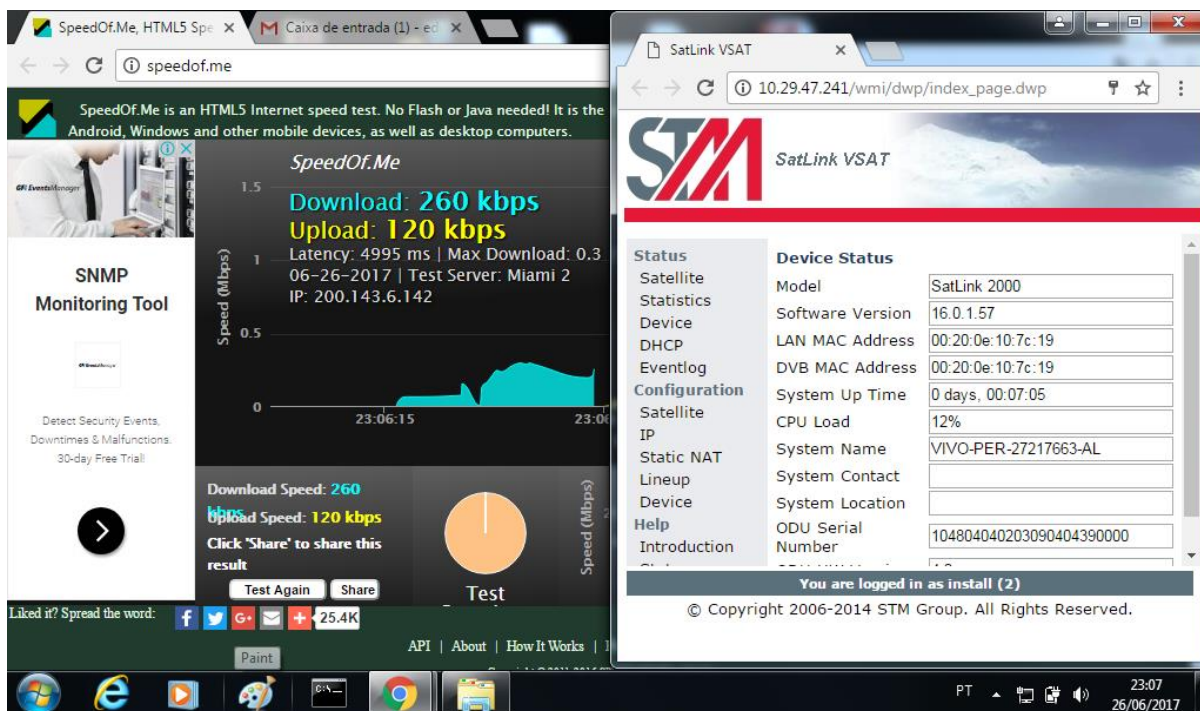

The screenshot shows two web browser windows. The left window is SpeedOf.Me, displaying an internet speed test result: Download: 260 kbps, Upload: 120 kbps, Latency: 4995 ms. The right window is SatLink VSAT, showing a configuration page for a SatLink 2000 device. The configuration includes: Model (SatLink 2000), Software Version (16.0.1.57), LAN MAC Address (00:20:0e:10:7c:19), DVB MAC Address (00:20:0e:10:7c:19), System Up Time (0 days, 00:07:05), CPU Load (12%), System Name (VIVO-PER-27217663-AL), System Contact, System Location, ODU Serial Number (104804040203090404390000), and Introduction.

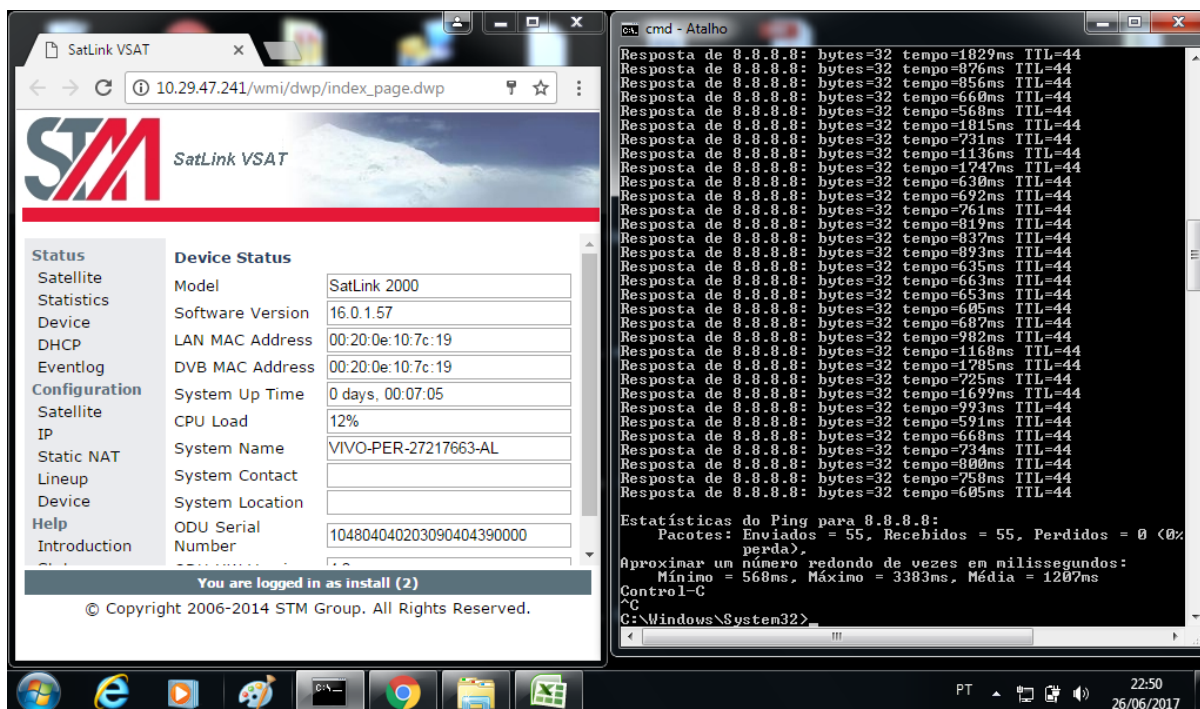

The screenshot shows the SatLink VSAT configuration page on the left and a Windows command prompt window on the right. The command prompt displays a series of ping results to 8.8.8.8, showing response times ranging from 568ms to 3383ms. The statistics at the bottom of the command prompt are: Enviados = 55, Recebidos = 55, Perdidos = 0 (0% perda). The command prompt also shows the command 'Control-C' and the directory 'C:\Windows\System32>'. The SatLink VSAT configuration page on the left is identical to the one in the previous screenshot.

Telnet 10.29.47.241

State : On <DUB-RCS2>
IDU Output Power : -19.7 dBm
ODU Output Power : 32.7 dBm
EIRP : 45.7 dBW
Es/No : 13.5 dB
Header Compression : Disabled
Timing correction : -3 us <255515 us>
Frequency correction: -110 Hz
#


Satellite <DUB> RX Configuration
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Enable	Freq[GHz]	Mode	PopId	SatId	Pos
* 0	0	15.000000	Yes	12.059000	DVB-S2 102		0	0.0
1	1	9.320000	Yes	12.055825	DVB-S2 4		0	0.0

Satellite <DUB> Receiver Status
Rx State : On
DUB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.059175 GHz
Symbol Rate : 15.000824 Msps
S2 ModCod :
- receiving : 19 16APSK-3/4
- current max : 20 16APSK-4/5
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 14.2 dB
Input Power : -24 dBm
#

SatLink VSAT

10.29.47.241/wmi/dwp/index_page.dwp

 SatLink VSAT

Status

Device Status

Satellite	Model	SatLink 2000
Statistics	Software Version	16.0.1.57
Device	LAN MAC Address	00:20:0e:10:7c:19
DHCP	DVB MAC Address	00:20:0e:10:7c:19
Eventlog	System Up Time	0 days, 00:07:05
Configuration	CPU Load	12%
Satellite	System Name	VIVO-PER-27217663-AL
IP	System Contact	
Static NAT	System Location	
Lineup	ODU Serial	104804040203090404390000
Device	Number	
Help		
Introduction		

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

PT

23:04

26/06/2017

