

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-26094509-PE

Link kbps
256K/128K

Plataforma
VSAT

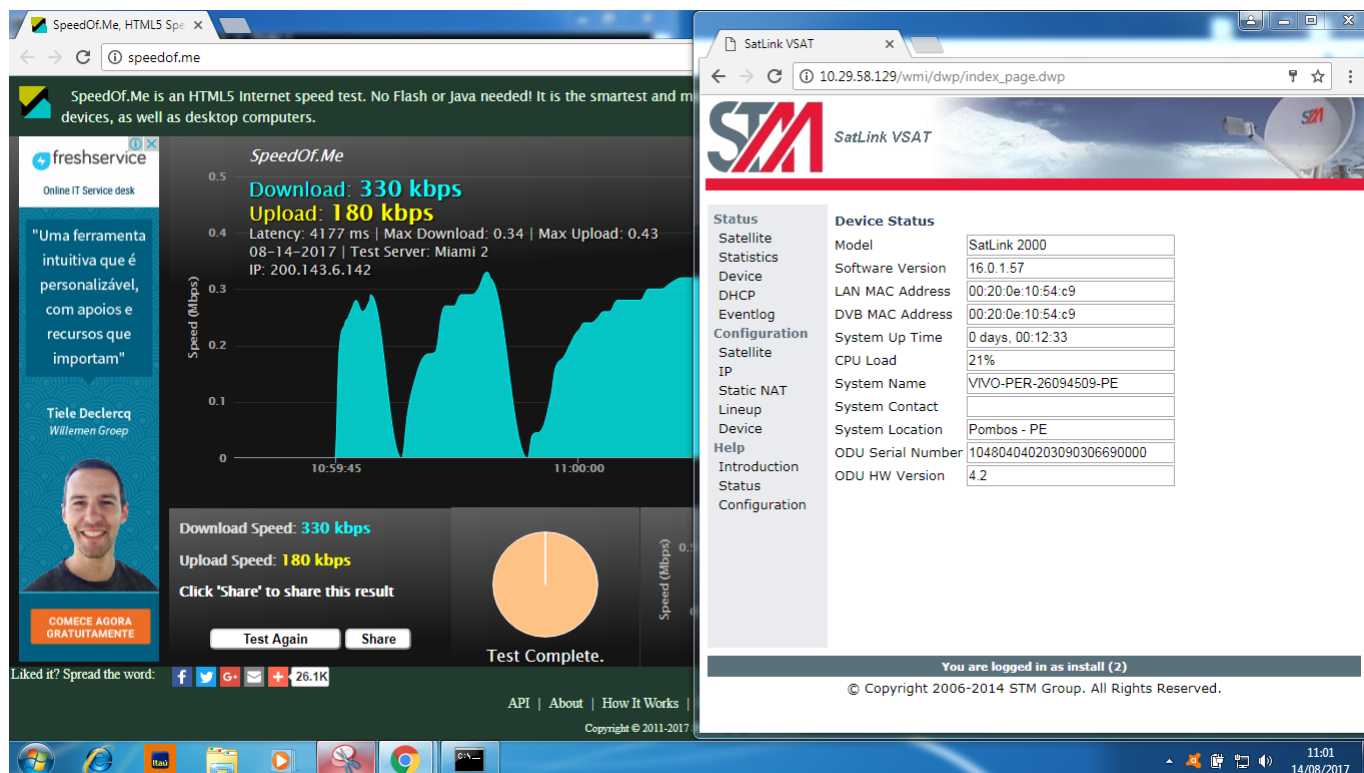

```
# dvb tx show
```

Satellite (DVB) TX Configuration

```
Auto start           : Enabled
IDU Output Power     : -19 dBm
IDU Max Output Power : 0.0 dBm

ODU Output Power     : 33.7 dBm
EIRP                 : 47.0 dBW
Default CW Frequency : 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
```

Satellite (DVB) Transmitter Status

```
State                : On (DVB-RCS2)
IDU Output Power     : -19.2 dBm
ODU Output Power     : 33.7 dBm
EIRP                 : 47.0 dBW
```

Es/No : 12.0 dB
Header Compression : Disabled
Timing correction : -44 us (251334 us)
Frequency correction: -60 Hz
dvb rx show

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName
Name		Enable						
* 0	0	25.333333	12.050000	DVB-S2	102	0	0.0 E	
Yes								
7	7	30.000000	12.050000	DVB-S2	102	0	0.0 E	
Yes								

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.050167 GHz
Symbol Rate : 25.332882 Msps
S2 ModCod
- receiving : 20 16APSK-4/5
- current max : 20 16APSK-4/5
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 13.8 dB
Input Power : -22 dBm

SatLink VSAT

10.29.58.129/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:54:c9

00:20:0e:10:54:c9

0 days, 00:12:33

21%

VIVO-PER-26094509-PE

Pombos - PE

104804040203090306690000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

CMD - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=572ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=670ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=743ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=786ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=854ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=870ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=865ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=743ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=802ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=876ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=916ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=608ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=769ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=849ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=864ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=623ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=582ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=774ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=864ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=584ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=666ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=735ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=886ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=896ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=608ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=678ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=761ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=825ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=896ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=627ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=785ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=785ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=869ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=581ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=647ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=738ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=816ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=901ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=836ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=916ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=618ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=564ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=765ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=836ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=916ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=628ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=722ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=774ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=871ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=611ms TTL=44

Estadísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 55, Recebidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 564ms, Máximo = 1901ms, Média = 763ms
Control-C
^C
C:\Windows\System32>

11:03

14/08/2017