



TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Vitor Hugo


Cliente: VIVO

Empresa EMC
Brasil

VSAT-ID
VIVO-PER-22004432-PI

Link kbps
1024k/256k

Plataforma VSAT

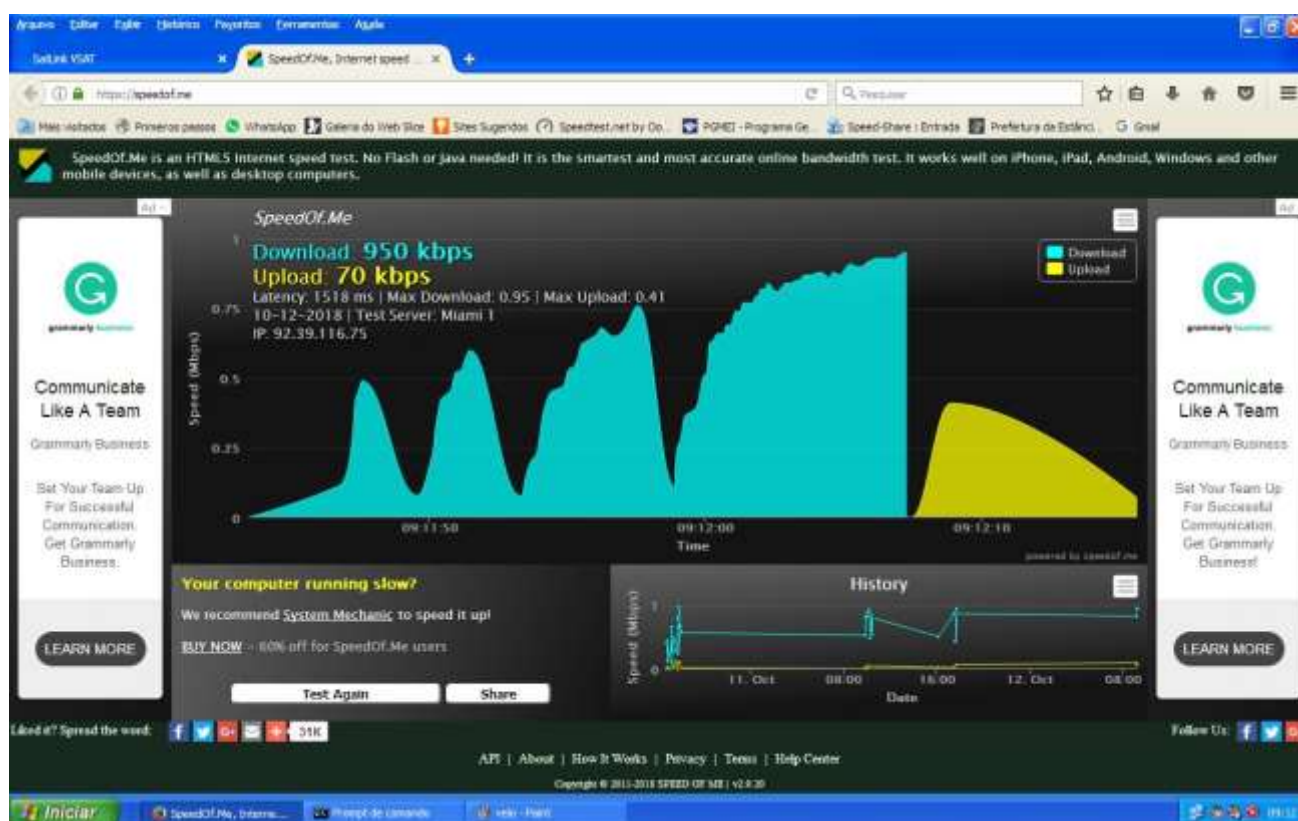

SatLink VSTAT 10.29.74.153/monitor/index_page.php

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:0e:10:87:f9
DVB MAC Address	00:20:0e:10:87:f9
System Up Time	0 days, 00:12:23
CPU Load	31%
System Name	VIVO-PER-22004432-PI
System Contact	
System Location	Experiência-PI

Prompt de comando

```
Resposta de 8.8.8.8: bytes=32 tempo=758ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=868ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=581ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=455ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=734ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=818ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1778ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=722ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1723ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=2829ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1206ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=753ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=888ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=593ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=679ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=751ms TTL=118

Estatísticas de Ping para 8.8.8.8:
    Pacotes: Enviados = 145, Recebidos = 145, Perdidos = 0 (0% de perda),
    Aproximado um número segundo de vezes em milissegundos:
        Mínimo = 519ms, Máximo = 2772ms, Média = 868ms
Control-C
C:\Documents and Settings\Administrador>
```

You are logged in as install (2) on VIVO-PER-22004432-PI

© Copyright 2006-2018 H201Global Technologies AS ®. All Rights Reserved.

SatLink VSTAT 10.29.74.153/monitor/index_page.php

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:0e:10:87:f9
DVB MAC Address	00:20:0e:10:87:f9
System Up Time	0 days, 00:12:23
CPU Load	31%
System Name	VIVO-PER-22004432-PI
System Contact	
System Location	Experiência-PI

Prompt de comando

```
Microsoft Windows XP [versão 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\Administrador>tracert 8.8.8.8

Rastreando a rota para google-public-dns-a.google.com [8.8.8.8]
com no máximo 30 saltos:

  1  <1 ms    <1 ms    <1 ms    10.29.74.153
  2  *         *         *         Erro: não foi possível obter tempo limite de pedido.
  3  236 ms   841 ms   1004 ms   172.30.3.102
  4  791 ms  1195 ms  1063 ms   92.39.116.10
  5  1073 ms 1085 ms  1070 ms   static-1.112.39.92.in-addr.arpa [92.39.112.1]
  6  1946 ms 1034 ms  1003 ms   2000.189.162.164.ipb.diasa.net.br [2000.189.162.1
54]
  7  1172 ms 1073 ms   751 ms   2000.147.20.129.static.uol.com.br [2000.147.20.129
3]
  8  1283 ms 1075 ms  1001 ms   as15169.sao Paulo.sp.ix.br [187.16.216.55]
  9  1188 ms 1001 ms  1069 ms   100.170.245.161
10  928 ms  1428 ms   638 ms   216.239.56.57
11  1012 ms 1064 ms  1007 ms   google-public-dns-a.google.com [8.8.8.8]

Rastreamento concluído.

C:\Documents and Settings\Administrador>
```

You are logged in as install (2) on VIVO-PER-22004432-PI

© Copyright 2006-2018 H201Global Technologies AS ®. All Rights Reserved.

SatLink VSAT

ID.29.74.153/versao/instala_page.php

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:0e:10:87:f9
DVB MAC Address	00:20:0e:10:87:f9
System Up Time	0 days, 00:06:36
CPU Load	34%
System Name	VIVO-PER-22004432-PI
System Contact	
System Location	Esperantina-PI

Satellite (DVB) Transmitter Status

State : On (DVB-RCS2)

ISO Output Power : -19.8 dBm

Ec/No : 13.5 dB

Header Compression : Disabled

Timing correction : -26 us (247600 us)

Frequency correction : -140 Hz

Satellite (DVB) RX Configuration

Auto start : Enabled

Max Signalling MOSCOW : 23 160PSK-9/10

Max Traffic MOSCOW : 28 320PSK-9/10

RX watchdog : 15 minute

Idx	Pri	EcnhRate(Mbps)	Freq(GHz)	Mode	PopId	SatId	Pos	SatName
0	0	30.000000	11.552800	DVB-S2 102	0	0.0	0	

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1328, 1148 Beam

Frequency : 11.552142 GHz

Symbol Rate : 30.000553 Mbps

S2 ModCod : 14 8PSK-3/4

receiving : 22 160PSK-9/9

Pilot : On

Frame length : Short

DVB S2 Mode : ACM

DVB S2 Stream type : MPEG-TS

Roll off : 0.20

CNR : 15.5 dB

Input Power : -35 dBm