

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Cunha


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-24296309-RN

Link kbps
256k/128k

Plataforma
VSAT

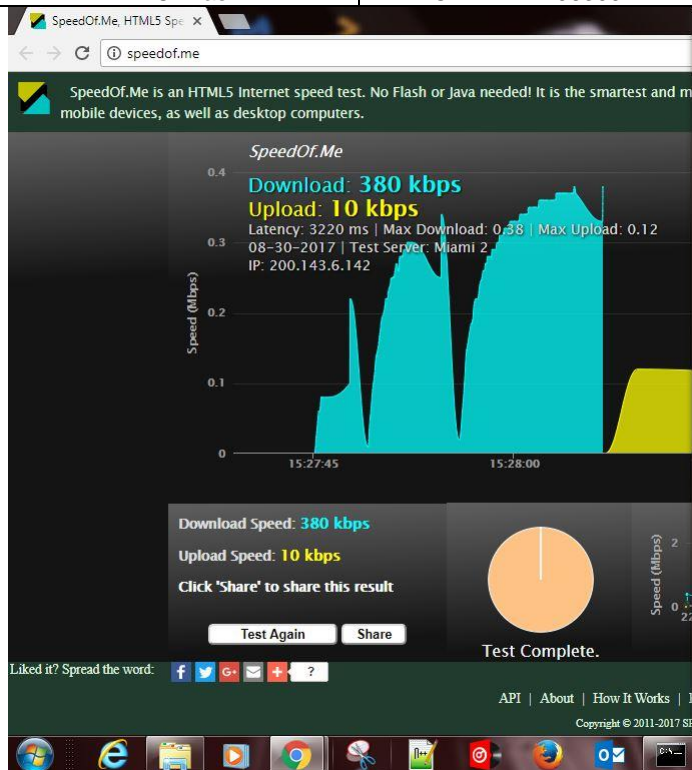

SatLink VSAT	
10.29.61.177/wmi/dwp/index_page.dwp	
STM SatLink VSAT	
Status	Device Status
Satellite	Model
Statistics	Software Version
Device	LAN MAC Address
DHCP	DVB MAC Address
Eventlog	System Up Time
Configuration	CPU Load
Satellite	System Name
IP	System Contact
Static NAT	System Location
Lineup	Device
Device	ODU Serial Number
Help	ODU HW Version
Introduction	
Status	
Configuration	

Satellite (DVB) TX Configuration

```

Auto start           : Enabled
IDU Output Power     : -20 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 32.7 dBm
EIRP                 : 46.0 dBW
Default CW Frequency : 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
  
```

Satellite (DVB) Transmitter Status

```

State                : On (DVB-RCS2)
IDU Output Power     : -15.4 dBm
ODU Output Power     : 32.5 dBm
EIRP                 : 45.8 dBW
Es/No                : 11.0 dB
Header Compression   : Disabled
Timing correction    : -18 us (251230 us)
Frequency correction : -60 Hz
  
```

Satellite (DVB) RX Configuration

```

Auto start           : Enabled
  
```

Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name
Enable									
* 0	0	25.333333	12.050000	DVB-S2	102	0	0.0 E		
Yes									
1	1	15.000000	12.059000	DVB-S2	4	0	0.0 E		
Yes									

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.049801 GHz
Symbol Rate : 25.332609 Msps
S2 ModCod
- receiving : 12 8PSK-3/5
- current max : 20 16APSK-4/5
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 14.4 dB
Input Power : -21 dBm

SatLink VSAT

SpeedOf.Me, HTML5 Sp...

10.29.61.177/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:48:59

00:20:0e:10:48:59

0 days, 00:33:54

21%

VIVO-PER-24296309-RN

GOIANINHA/RN

104804040203090706170000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe

Resposta de 8.8.8.8: bytes=32 tempo=945ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2572ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=722ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=678ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=636ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=827ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1026ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=950ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=682ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=868ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=592ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=672ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=748ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=698ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=893ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=597ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=964ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1755ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=764ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=784ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=3092ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=812ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=762ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=718ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=803ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=881ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=595ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=785ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=92ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=937ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=876ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=867ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 45, Recebidos = 45, Perdidos = 0 (0% de perda)
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 589ms, Máximo = 3147ms, Média = 966ms
Control-C
^C
C:\Users\DjTornados>arp -a

Interface: 10.29.61.178 --- 0xb
Endereço IP Endereço físico Tipo
10.29.61.177 00-20-0e-10-48-59 dinâmico
10.29.61.183 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.251 01-00-5e-00-00-fb estático
224.0.0.252 01-00-5e-00-00-fc estático
224.0.1.60 01-00-5e-00-01-3c estático
239.255.255.250 01-00-5e-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Users\DjTornados>