

S

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31090344-MG

Link kbps
256k/128k

Plataforma
VSAT

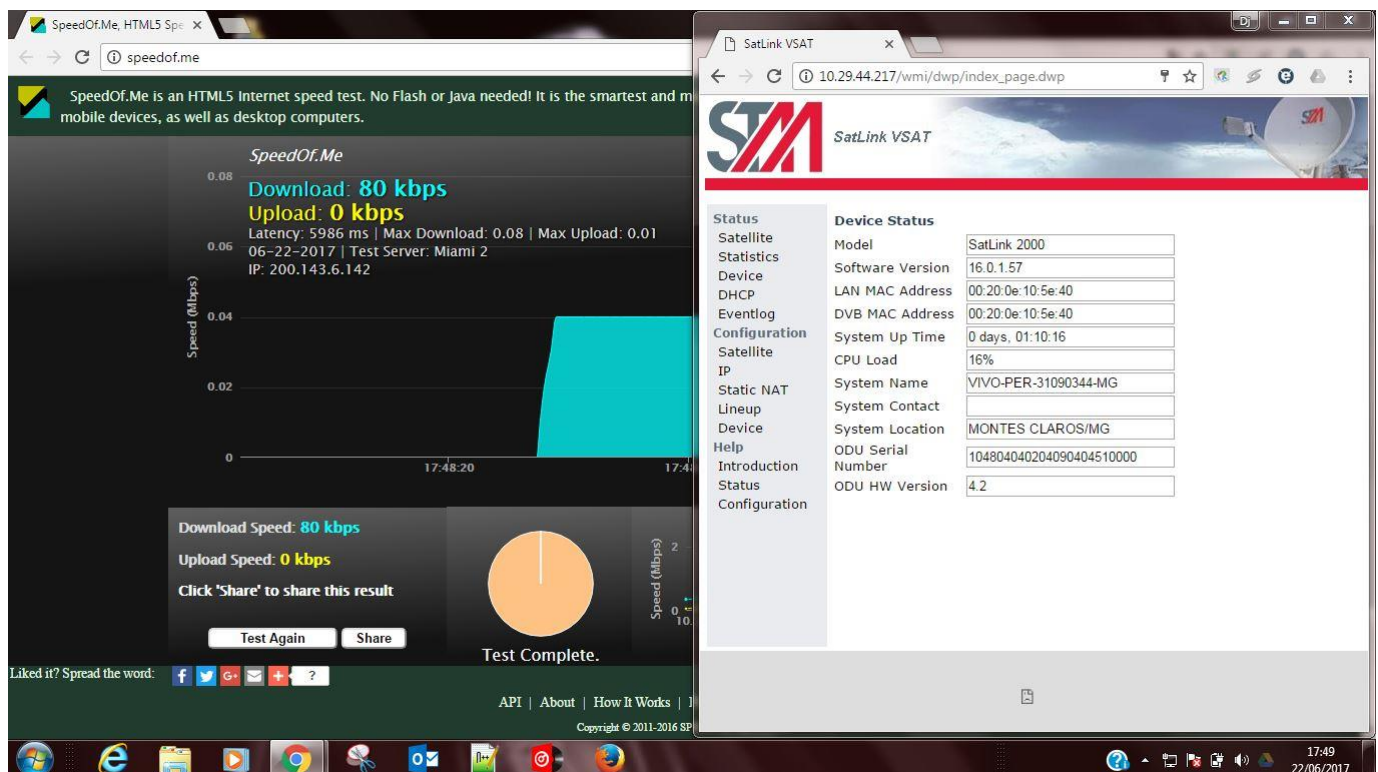

```
# dvb tx show
```

Satellite (DVB) TX Configuration

```
-----
Auto start           : Enabled
IDU Output Power     : -20 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 32.7 dBm
EIRP                 : 46.0 dBW
Default CW Frequency: 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
```

```
# dvb rx show
```

Satellite (DVB) RX Configuration

```
-----
Auto start           : Enabled
Max Traffic MODCOD    : 23    16APSK-9/10
RX watchdog           : 15 minute
```


Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name
-----	-----	----------------	-----------	------	-------	-------	-----	---------	------

Enable
* 0 0 15.000000 12.059000 DVB-S2 102 0 0.0 E
Yes
1 1 9.320000 12.055825 DVB-S2 4 0 0.0 E
Yes

SatLink VSAT

SpeedOf.Me, HTML5 Speed Test

10.29.44.217/wmi/dwp/index_page.dwp

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:5e:40

00:20:0e:10:5e:40

0 days, 00:34:39

18%

VIVO-PER-31090344-MG

MONTES CLAROS/MG

104804040204090404510000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe

Resposta de 8.8.8.8: bytes=32 tempo=1238ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=709ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=781ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=733ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=584ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=654ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1577ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=606ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=675ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=758ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=821ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=912ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1695ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=712ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=903ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=868ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=592ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=664ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=770ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=815ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=894ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=608ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=695ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=766ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=847ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=552ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=706ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=783ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=865ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=995ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1010ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=714ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=713ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=625ms TTL=44

Estatísticas do Ping para 8.8.8.8:

Pacotes: Enviados = 45, Recebidos = 0 (0% de

perda).

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 552ms, Máximo = 1695ms, Média = 798ms

Control-C

^C

C:\Users\DjTornados>arp -a

Interface: 10.29.44.218 --- 8xb

Endereço IP Endereço físico Tipo

10.29.44.217 00-20-0e-10-5e-40 dinâmico

10.29.44.223 ff-ff-ff-ff-ff-ff estático

224.0.0.2 01-00-5e-00-00-02 estático

224.0.0.251 01-00-5e-00-00-fb estático

224.0.0.252 01-00-5e-00-00-fc estático

224.0.1.60 01-00-5e-00-01-3c estático

239.255.255.250 01-00-5e-7f-ff-fa estático

255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Users\DjTornados>

16:15

22/06/2017