

# TERMO DE ACEITE TÉCNICO

**Solicitante:** VIVO- Projeto Escolas Rurais

**NOC/Operador:** Wallace Teixeira


**Cliente:** Vivo

**Empresa**  
EMC Brasil

**VSAT-ID**  
VIVO-PER-24062030-RN


**Link kbps**  
256K/128K

**Plataforma**  
VSAT

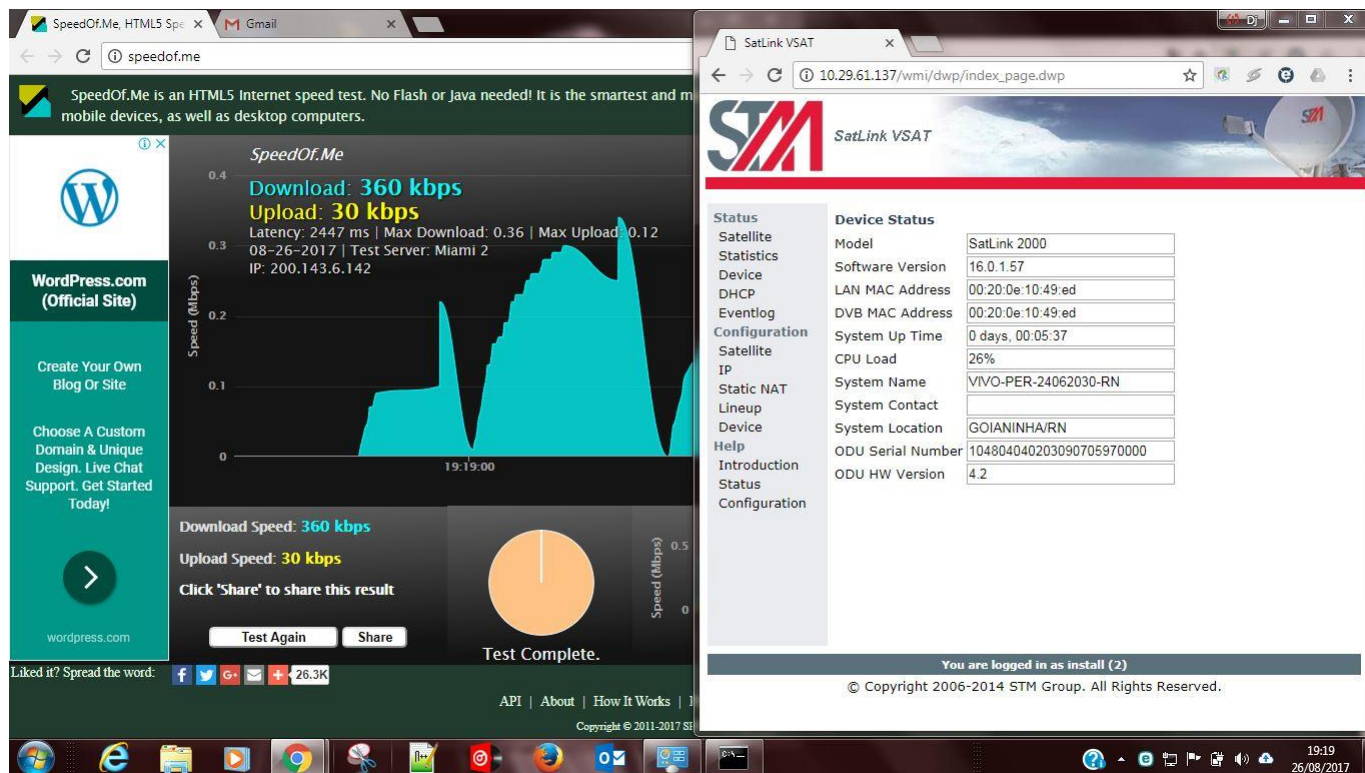

SatLink VSAT

10.29.61.137/wmi/dwp/index\_page.dwp



**Status**

Satellite Statistics

Device DHCP Eventlog Configuration Satellite IP Static NAT Lineup Device Help Introduction Status Configuration

**Device Status**

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:49:ed
DVB MAC Address	00:20:0e:10:49:ed
System Up Time	0 days, 00:05:37
CPU Load	26%
System Name	VIVO-PER-24062030-RN
System Contact	
System Location	GOIANINHA/RN
ODU Serial Number	104804040203090705970000
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Telnet 10.29.61.137

```
#
Satellite <DUB> TX Configuration
Auto start : Enabled
IDU Output Power : -20 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power : 32.7 dBm
EIRP : 46.0 dBm
Default CW Frequency : 0.000000 GHz
dTM mode : UC-Mux
Header Compression : None

Satellite <DUB> Transmitter Status
State : On <DUB-RCS2>
IDU Output Power : -15.5 dBm
ODU Output Power : 32.7 dBm
EIRP : 46.0 dBm
Es/No : 12.5 dB
Header Compression : Disabled
Timing correction : -42 us <251200 us>
Frequency correction : -20 Hz


Satellite <DUB> RX Configuration
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx Pri SymbRate[Maps] Freq[GHz] Mode PopId SatId Pos SatName
* 0 0 25.333333 12.050000 DVB-S2 102 0 0.0 E
1 1 20.000000 12.050000 DVB-S2 102 0 0.0 E

Satellite <DUB> Receiver Status
Rx State : On
DUB State : Forward link up
Network : 1326.7148 Beam
Frequency : 12.050162 GHz
Symbol Rate : 25.333000 Maps
S2 ModCod : 14 8PSK-3/4
- receiving : 22 16APSK-8/9
current max : On
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 14.8 dB
Input Power : -25 dBm
```

SatLink VSAT

10.29.61.137/wmi/dwp/index\_page.dwp



**Status**

Satellite Statistics

Device DHCP Eventlog Configuration Satellite IP Static NAT Lineup Device Help Introduction Status Configuration

**Device Status**

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:49:ed
DVB MAC Address	00:20:0e:10:49:ed
System Up Time	0 days, 00:05:37
CPU Load	26%
System Name	VIVO-PER-24062030-RN
System Contact	
System Location	GOIANINHA/RN
ODU Serial Number	104804040203090705970000
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

```
C:\Windows\system32\cmd.exe
Resposta de 8.8.8.8: bytes=32 tempo=814ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=908ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=628ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=683ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2207ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=729ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=81ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=887ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=595ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=104ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=731ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=771ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=870ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=597ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=674ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=746ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=696ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=905ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=619ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=684ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=779ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=846ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1303ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=731ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=791ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=584ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=657ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=733ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=827ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=710ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=619ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=684ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=766ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 50, Recebidos = 50, Perdidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 577ms, Máximo = 2207ms, Média = 804ms
Control-C
C:\Users\DjTornados>arp -a

Interface: 10.29.61.138 --- 0xb
Endereço IP Endereço físico Tipo
10.29.61.137 00-20-0e-10-49-ed dinâmico
10.29.61.143 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.251 01-00-5e-00-00-fb estático
224.0.0.252 01-00-5e-00-00-fc estático
224.0.1.60 01-00-5e-00-01-3c estático
239.255.255.250 01-00-5e-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Users\DjTornados>
```