



NOC/Operador: Wallace Teixeira


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31307955-MG

Link kbps
256k/128k

Plataforma VSAT

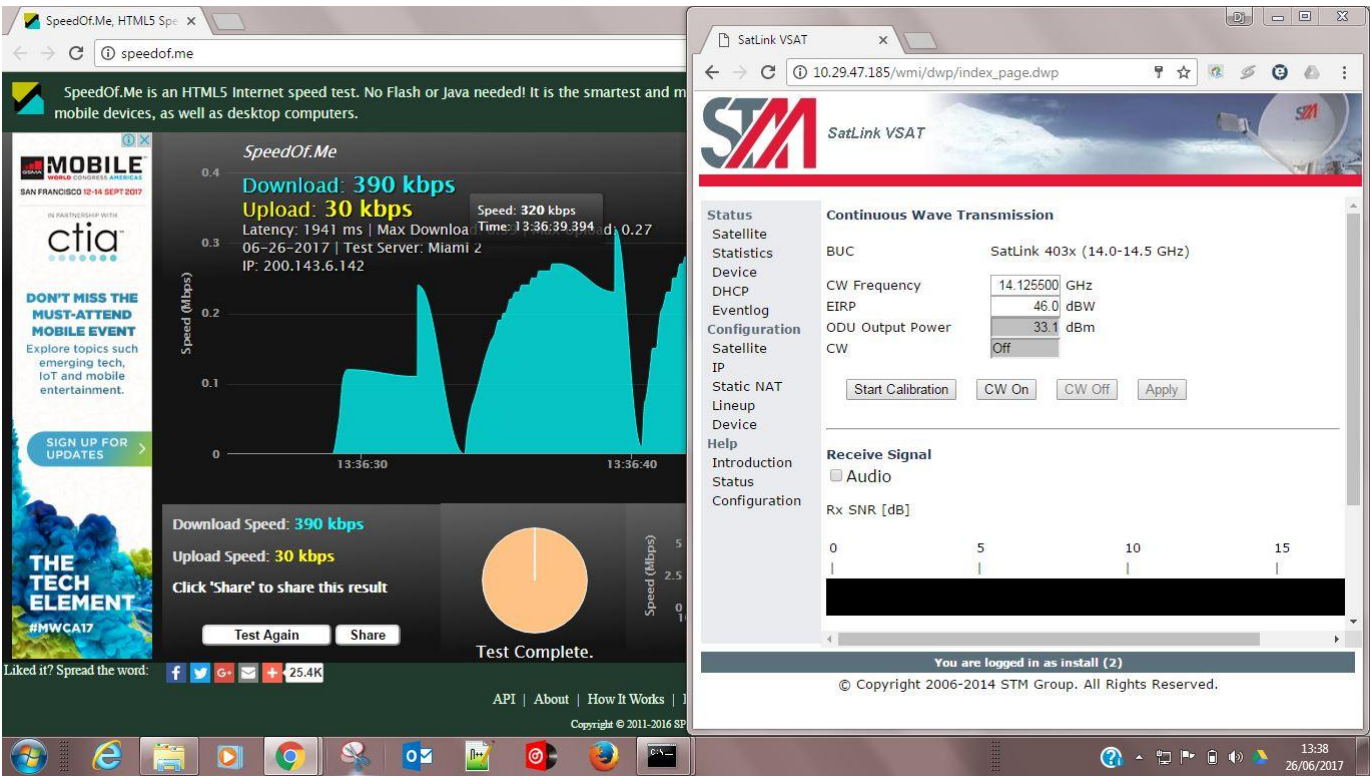

```
# dvb tx show
```

Satellite (DVB) TX Configuration

```
Auto start           : Enabled
IDU Output Power    : -17 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power    : 34.7 dBm
EIRP                : 48.0 dBW
Default CW Frequency: 14.125500 GHz
ATM mode            : VC-Mux
Header Compression  : None
```

```
# dvb rx show
```

Satellite (DVB) RX Configuration

```
Auto start           : Enabled
Max Traffic MODCOD   : 23    16APSK-9/10
RX watchdog          : 15 minute
```

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name
-----	-----	----------------	-----------	------	-------	-------	-----	---------	------

```
* 0 0 15.000000 12.059000 DVB-S2 102 0 0.0 E
Yes
1 1 9.320000 12.055825 DVB-S2 4 0 0.0 E
Yes
```

SatLink VSAT

SpeedOf.Me, HTML5 Spe

10.29.47.185/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:58:eb

00:20:0e:10:58:eb

0 days, 00:34:14

15%

VIVO-PER-31307955-MG

BONITO/MG

106546040203080401030000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe

Resposta de 8.8.8.8: bytes=32 tempo=606ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=2093ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=667ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1508ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1540ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1502ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1314ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=772ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1090ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1299ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1054ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=582ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=732ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=616ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=572ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1193ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1432ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=687ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=643ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=577ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1298ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=942ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=846ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=657ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=765ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=612ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=567ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=656ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=635ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=837ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=672ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=569ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=589ms TTL=44

Resposta de 8.8.8.8: bytes=32 tempo=1847ms TTL=44

Estadísticas de Ping para 8.8.8.8:

Pacotes: Enviados = 43, Recebidos = 43, Perdidos = 0 (0% de

perda).

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 567ms, Máximo = 2093ms, Média = 940ms

Control-C

^C

C:\Users\DjTornados>arp -a

Interface: 10.29.47.186 --- 0xb

Endereço IP Endereço físico Tipo

10.29.47.185 00-20-0e-10-58-eb dinâmico

10.29.47.191 ff-ff-ff-ff-ff-ff estático

224.0.0.2 01-00-5e-00-00-02 estático

224.0.0.22 01-00-5e-00-00-16 estático

224.0.0.251 01-00-5e-00-00-fb estático

224.0.0.252 01-00-5e-00-00-fc estático

224.0.1.60 01-00-5e-00-01-3c estático

239.255.255.250 01-00-5e-7f-ff-fa estático

255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Users\DjTornados>

12:15

26/06/2017