



TERMO DE ACEITE TÉCNICO

Solicitante: ATI - Agência de Tecnologia da Informação do Estado do Piauí

NOC/Operadora: Wallace Teixeira

Técnico Instalador: Arnaldo Ribeiro
Contato: 88 99810-4720
Email: relvanetpoint@gmail.com

ATI: Wesley Souza

Responsável/cliente: Sr Josafa

Orgão: ATI - Agência de Tecnologia da Informação

Data Instalação
19/12/2018

Data Ativação
19/12/2018

Unidade: Praça da Igreja Matriz
de Santo Antonio

Município: Santo Antônio de Lisboa

Coordenadas: 06°58'55.51"S 41°13'58.03"W

Operadora
Global Eagle



VSAT-ID
ATI-ES-0259-OUT

Porta kbps
4M/512k

Tipo
Outdoor

Piauí, 19 de Dezembro de 2018

1 – Local da Instalação

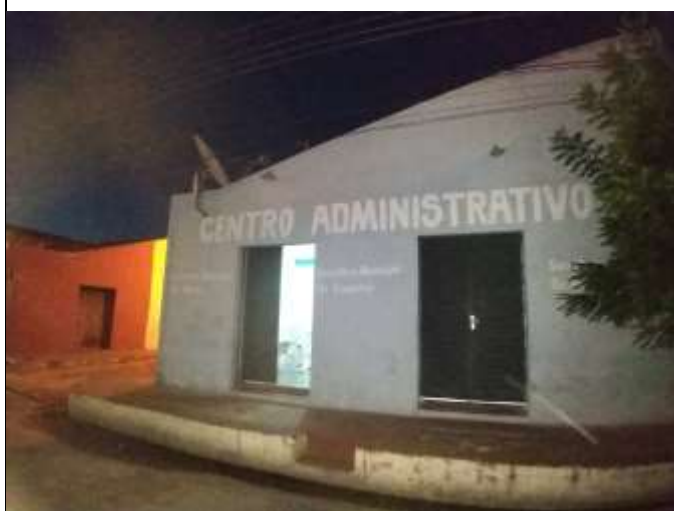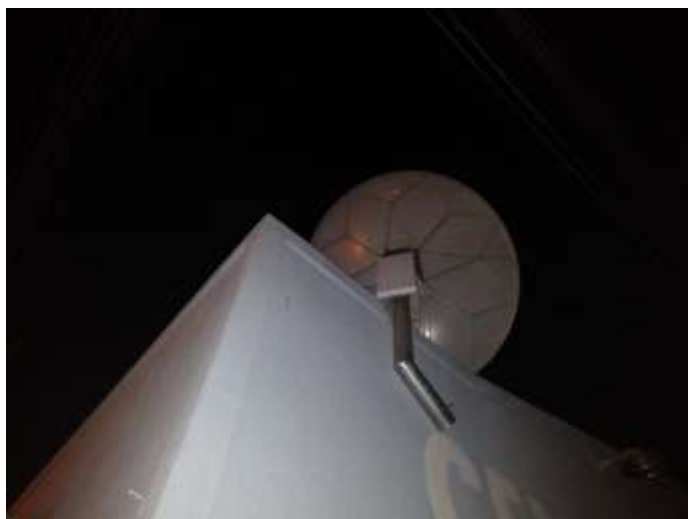

2 – Configurações do Modem

device show

System Information:

Name : ATI-PB-0259-OUT
Location : ATI
Contact :
System Up time : 0 days, 03:28:40
CPU Load : 26%
System time(UTC) : 20 December 2018 02:23:15
Broadcast Message : not set

HW:

Model : SatLink 2000
HW ID : 120033
Main board ID : 120026 R6.2

MAC addresses:

LAN : 00:20:0e:10:94:1e
Satellite (DVB) : 00:20:0e:10:94:1e

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled
BUPC status : Disabled
IDU Output Power : -20 dBm
IDU Max Output Power: 0.0 dBm
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS2)
IDU Output Power : -20.1 dBm
Es/No : 11.0 dB
Header Compression : Disabled
Timing correction : 69 us (249690 us)
Frequency correction: 150 Hz

dvb rx show

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 28 32APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name	Enable
* 0	0	25.000000	11.628079	DVB-S2	105	0	0.0 E		Yes	

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up
Network : 1326, ATI-PI
Frequency : 11.628055 GHz
Symbol Rate : 24.999764 Msps
S2 ModCod
- receiving : 1 QPSK-1/4
- current max : 21 16APSK-5/6
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.25
SNR : 15.2 dB
Input Power : -35 dBm
odu show

Antenna

Type ASC/Andrew/Channel Master Type 123 - 1.2m
Antenna controller None
Tx Gain 43.3dB

Transmitter (BUC)

Type JRC NJT5017 (14.0-14.5 GHz)
Local oscillator 13.050000 GHz
DC supply 24V On
Reference 10Mhz On

Receiver (LNB)

Type Zinwell ZK-VJ1 (10.70-12.75 GHz)
Local oscillator - LO1 9.750000 GHz
Local oscillator - LO2 10.600000 GHz
Oscillator switching frequency 1-2 11.700000 GHz
LO Switching mode 22KHz
13/18V DC supply 13V

ip show

Interfaces

If	IPAddress	SubnetMask	BroadCastAddr	MTU	Alias	AdminStatus
1	10.225.4.21	255.255.255.252	10.225.4.23	1540	eth0	1
3	172.18.137.222	255.255.255.255	N/A	1540	dvb0	1
4	N/A	N/A	N/A	1540	air0	1

DNS Client Configuration

Primary DNS Server: 8.8.8.8, Secondary DNS Server: 8.8.4.4

Interface Statistics

----- Input ----- Output -----
If UCast NUCast Disc Octets UCast NUCast Disc Octets
1 55108 0 274 15886755 28358 105 0 5350128
3 39632 0 437 6290677 65497 0 86 15773235
4 0 0 0 0 0 0 0 0

IP	Receive	Deliver	Errors	InDiscards	Forward	Request	NoRoute	OutDiscards
	94497	12448	0	0	106558	12806	0	958

Interface Directed Routing Table

In If	Out If
-------	--------

-----IP LAC Statistics-----

RPF	Src eq dest	RPF HitCount	SrceqdestHitCount	MfcHitCount (-1/drop classified)
Disabled	Enabled	0	0	0

Routing Table

DestMask	RouteMask	NextHop If	RtType	Row-Status
0.0.0.0	0.0.0.0	0.0.0.0 3	STATIC	ACTIVE
10.225.4.20	255.255.255.252	0.0.0.0 1	LOCAL	ACTIVE
10.226.15.0	255.255.255.0	10.225.4.22 1	STATIC	ACTIVE
172.18.137.222	255.255.255.255	0.0.0.0 3	LOCAL	ACTIVE


3 – Configurações dos Equipamento

```
COM4 - PuTTY
admin >ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.225.4.22 netmask 255.255.255.252 broadcast 10.225.4.23
    ether 00:90:27:ef:6e:70 txqueuelen 10000 (Ethernet)
    RX packets 5425 bytes 1911264 (1.8 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 7230 bytes 1410973 (1.3 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
    device interrupt 16 memory 0xfe8e0000-fe900000

eth1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.226.15.1 netmask 255.255.255.0 broadcast 10.226.15.255
    ether 00:90:27:ef:6e:71 txqueuelen 10000 (Ethernet)
    RX packets 7347 bytes 1447035 (1.3 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 5368 bytes 1907434 (1.8 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
    device interrupt 17 memory 0xfe9e0000-fea00000

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    loop txqueuelen 1 (Local Loopback)
    RX packets 13516 bytes 9241093 (8.8 MiB)
```

Configurações de Rede

Configurações Interfaces Roteamento Estático Roteamento Dinâmico Configurações IPv6 Controle de Banda H.A.						
Status	Interface	Endereço	Gateway	Tipo	Zona	Ação
	 eth0	10.225.4.22/30	-	Física	WAN	 
	 eth1	10.226.15.1/24	-	Física	LAN	 
	 eth2	-	-	Física	-	 
	 eth3	-	-	Física	-	 



4 – Teste de Velocidade -Download/Upload

