

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
SESACRE-PORTO_WALTER

Link kbps
256k/128k

Plataforma
VSAT

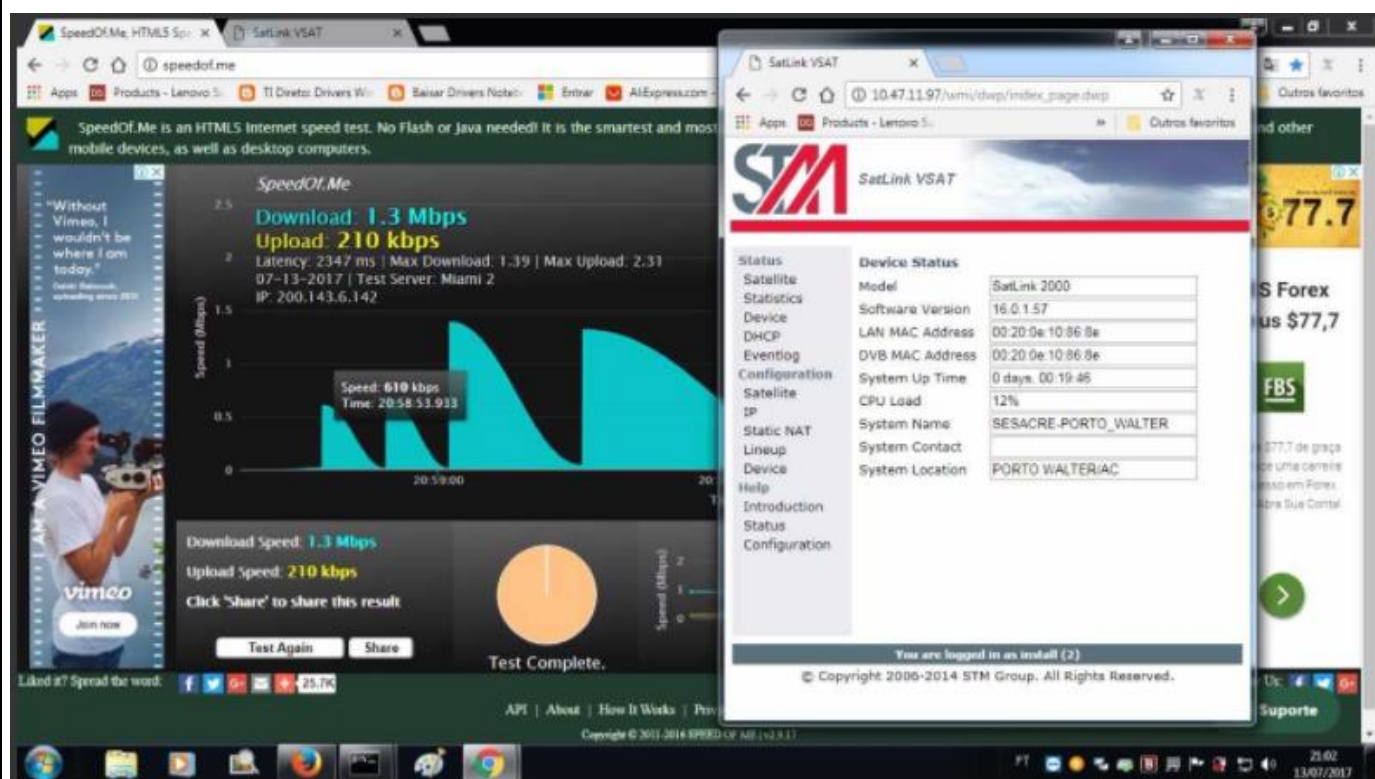

```
Prompt de Comando
- Main board ID 120826, Revision B6.2
- SW ID 120808, Revision 16.0.1 Build 57

Satellite (DVB) TX Configuration
Auto start : Enabled
(DO Output Power : -20 dBm
(DO Max Output Power: 0.0 dBm
Default OF Frequency: 0.000000 GHz
RTN mode : UC-Box
Header Compression : None

Satellite (DVB) Transmitter Status
State : On (DVB-RCS)
(DO Output Power : -20.0 dBm
CA/No : 12.0 dB
Header Compression : Disabled
Timing correction : -3 us (246469 us)
Frequency correction: -20 Hz

Satellite (DVB) RX Configuration
Auto start : Enabled
Max Traffic MODCOD : 12 16BPSK-9/10
RG Switching : 15 minutes

Idx Prt SymbolRate(Mbps) Freq(GHz) Mode Pupid Satid Pwr SatName
Main Enable
0 0 25.333333 12.050000 DVB-S2 4 0 0.0 E
1 1 15.000000 12.050000 DVB-S2 4 0 0.0 E

Satellite (DVB) Receiver Status
Rx State : On
DVB State : Forward Link up
Network : 1326, T148 Beam
Frequency : 12.050004 GHz
Symbol Rate : 25.333306 Mbps
C2 ModCod :
- receiving : 14 BPSK-2/4
- current max : 10 16BPSK-2/2
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Null off : 0.28
CNR : 12.0 dB
Input Power : -36 dBm
C
Canais ao host perdidos.
C:\Users\Gustavo>
```

 SatLink VSAT

Status

Satellite Statistics

Device

DHCP

Eventlog

Configuration

Satellite IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:86:8e
DVB MAC Address	00:20:0e:10:86:8e
System Up Time	0 days, 00:19:46
CPU Load	12%
System Name	SESACRE-PORTO_WALTER
System Contact	
System Location	PORTO WALTER/AC

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

```
Prompt de Comando
Resposta de 0.0.0.0: bytes=32 tempo=673ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=686ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=727ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=675ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=546ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=546ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=565ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1402ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1591ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=540ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=654ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=583ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=552ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=607ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=724ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=651ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=572ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=677ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=680ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=705ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=641ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=551ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=565ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=595ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=695ms TTL=44

Estatísticas do Ping para 0.0.0.0:
Pacotes Enviados = 175, Recibidos = 175, Perdidos = 0 GB de
perda.
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 544ms, Máximo = 2007ms, Média = 756ms
Control-C
C:\Users\Gustavo>arp -a

Interface: 10.47.11.99 --- 80b
Endereço IP Endereço físico Tipo
10.47.11.97 00-20-0e-10-86-8e dinâmico
10.47.11.100 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-80-5a-00-00-02 estático
224.0.0.22 01-80-5a-00-00-16 estático
224.0.0.251 01-80-5a-00-00-fb estático
224.0.0.252 01-80-5a-00-00-fc estático
239.255.255.250 01-80-5a-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático

Interface: 10.47.11.90 --- 8015
Endereço IP Endereço físico Tipo
10.47.11.100 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-80-5a-00-00-02 estático
224.0.0.22 01-80-5a-00-00-16 estático
224.0.0.251 01-80-5a-00-00-fb estático
224.0.0.252 01-80-5a-00-00-fc estático
239.255.255.250 01-80-5a-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático
C:\Users\Gustavo>
```

 SatLink VSAT

Status

Satellite Statistics

Device

DHCP

Eventlog

Configuration

Satellite IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:86:8e
DVB MAC Address	00:20:0e:10:86:8e
System Up Time	0 days, 00:05:12
CPU Load	27%
System Name	SESACRE-PORTO_WALTER
System Contact	
System Location	PORTO WALTER/AC

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.