

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-28010027-SE

Link kbps
256k/128k

Plataforma
VSAT

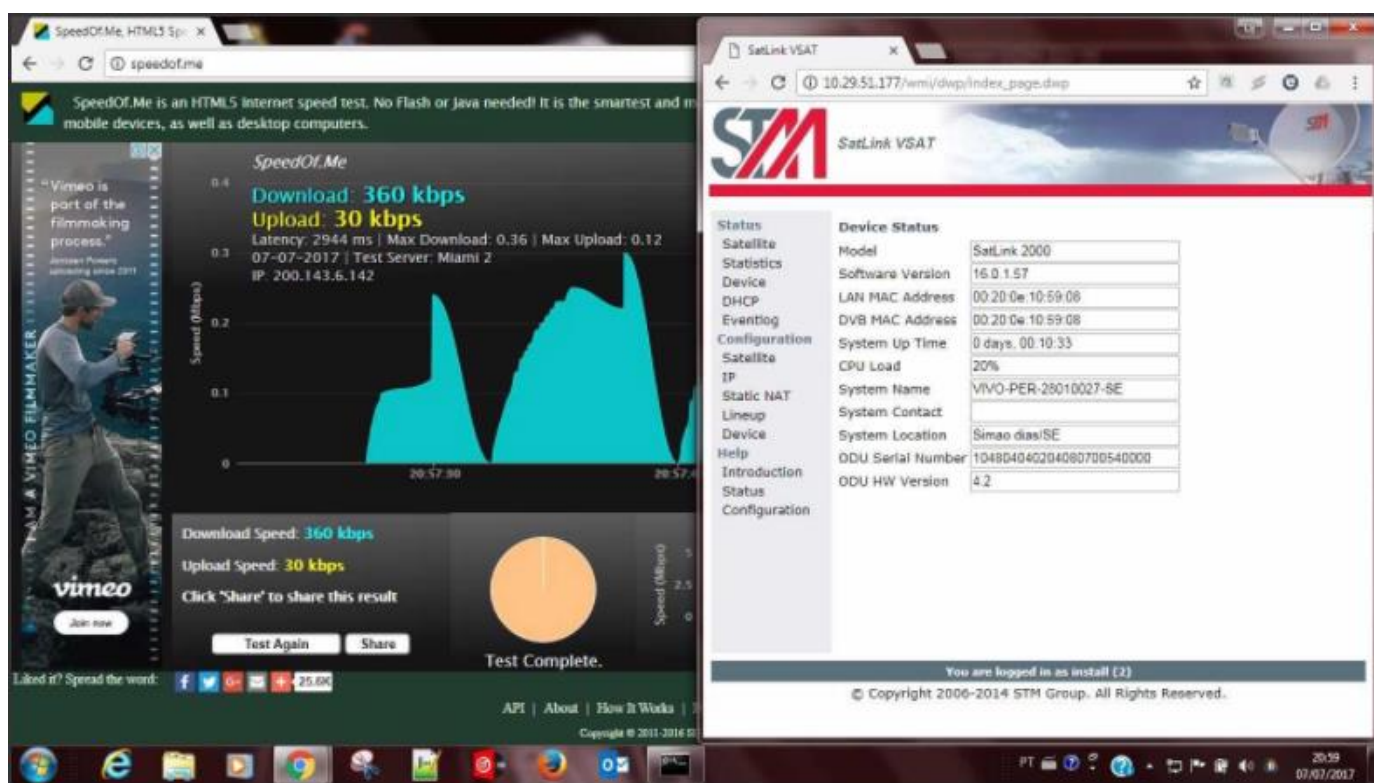

SatLink VSAT

10.29.51.177/wm/dwp/index_page.dwp

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:59:08
DVB MAC Address	00:20:0e:10:59:08
System Up Time	0 days, 00:05:57
CPU Load	18%
System Name	VIVO-PER-28010027-SE
System Contact	
System Location	Simao dias/SE
ODU Serial Number	104804040204090700540000
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Terminet 10.29.51.177

THUNDER

Satellite (DVB) TX Configuration

Auto start	Enabled
LD Output Power	-20 dBm
LD Max Output Power	0.0 dBm
ODU Output Power	32.7 dBm
EIRP	46.0 dBm
Default OF Frequency	0.000000 GHz
STM mode	95-Max
Header Compression	None

Satellite (DVB) Transmitter Status

State	On (DVB-RCS2)
LD Output Power	-23.4 dBm
ODU Output Power	32.7 dBm
EIRP	46.0 dBm
On/No	11.0 dB
Header Compression	Disabled
Frequency correction	-5 us (-255222 us)
Frequency correction	40 Hz

Satellite (DVB) RX Configuration

Auto start	Enabled
Max Traffic MODCOD	23 16QPSK-9/10
RX watchdog	15 minutes

Satellite (DVB) Receiver Status

Rx State	On
ODU State	Forward link up
Network	1325 T14B Bean
Frequency	12.058943 GHz
Symbol Rate	15.000007 Msps
S2 ModCod	- receiving: 14 8PSK-3/4 - current max: 22 16QPSK-8/9
Pilot	On
Frame length	Short
ODU S2 Mode	RCM
ODU S2 Stream type	MPEG-TS
Roll off	0.20
SNR	14.6 dB
Input Power	-21 dBm

SatLink VSAT

10.29.51.177/wm/dwp/index_page.dwp

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:59:08
DVB MAC Address	00:20:0e:10:59:08
System Up Time	0 days, 00:05:57
CPU Load	18%
System Name	VIVO-PER-28010027-SE
System Contact	
System Location	Simao dias/SE
ODU Serial Number	104804040204090700540000
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe

```
Resposta de 0.0.0.0: bytes=32 tempo=627ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=648ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=2093ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=2126ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=779ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1235ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1042ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1073ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=628ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=855ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=2752ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=707ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=791ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1472ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=811ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=883ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1903ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=648ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1070ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1803ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=628ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=894ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=725ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1236ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=669ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=746ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1536ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=727ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1148ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=655ms TTL=44
Resposta de 0.0.0.0: bytes=32 tempo=1763ms TTL=44

Estatísticas de Ping para 0.0.0.0:
Pacotes: Enviados = 76, Recebidos = 76, Perdidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 567ms, Máximo = 2752ms, Média = 1075ms
Control-C
C:\Users\Bjornados>arp -a

Interface: 10.29.51.178 --- Rbcb
Endereço IP Endereço Físico Tipo
10.29.51.177 00-20-0e-10-59-08 estático
10.29.51.183 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.22 01-00-5e-00-00-16 estático
224.0.0.251 01-00-5e-00-00-1b estático
224.0.0.252 01-00-5e-00-00-1c estático
224.0.1.10 01-00-5e-00-01-3c estático
239.255.255.250 01-00-5e-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático
C:\Users\Bjornados>
```