


Multi-Vital Monitor - Wiring

ESP32 (classic, dual core) - every connection in the build

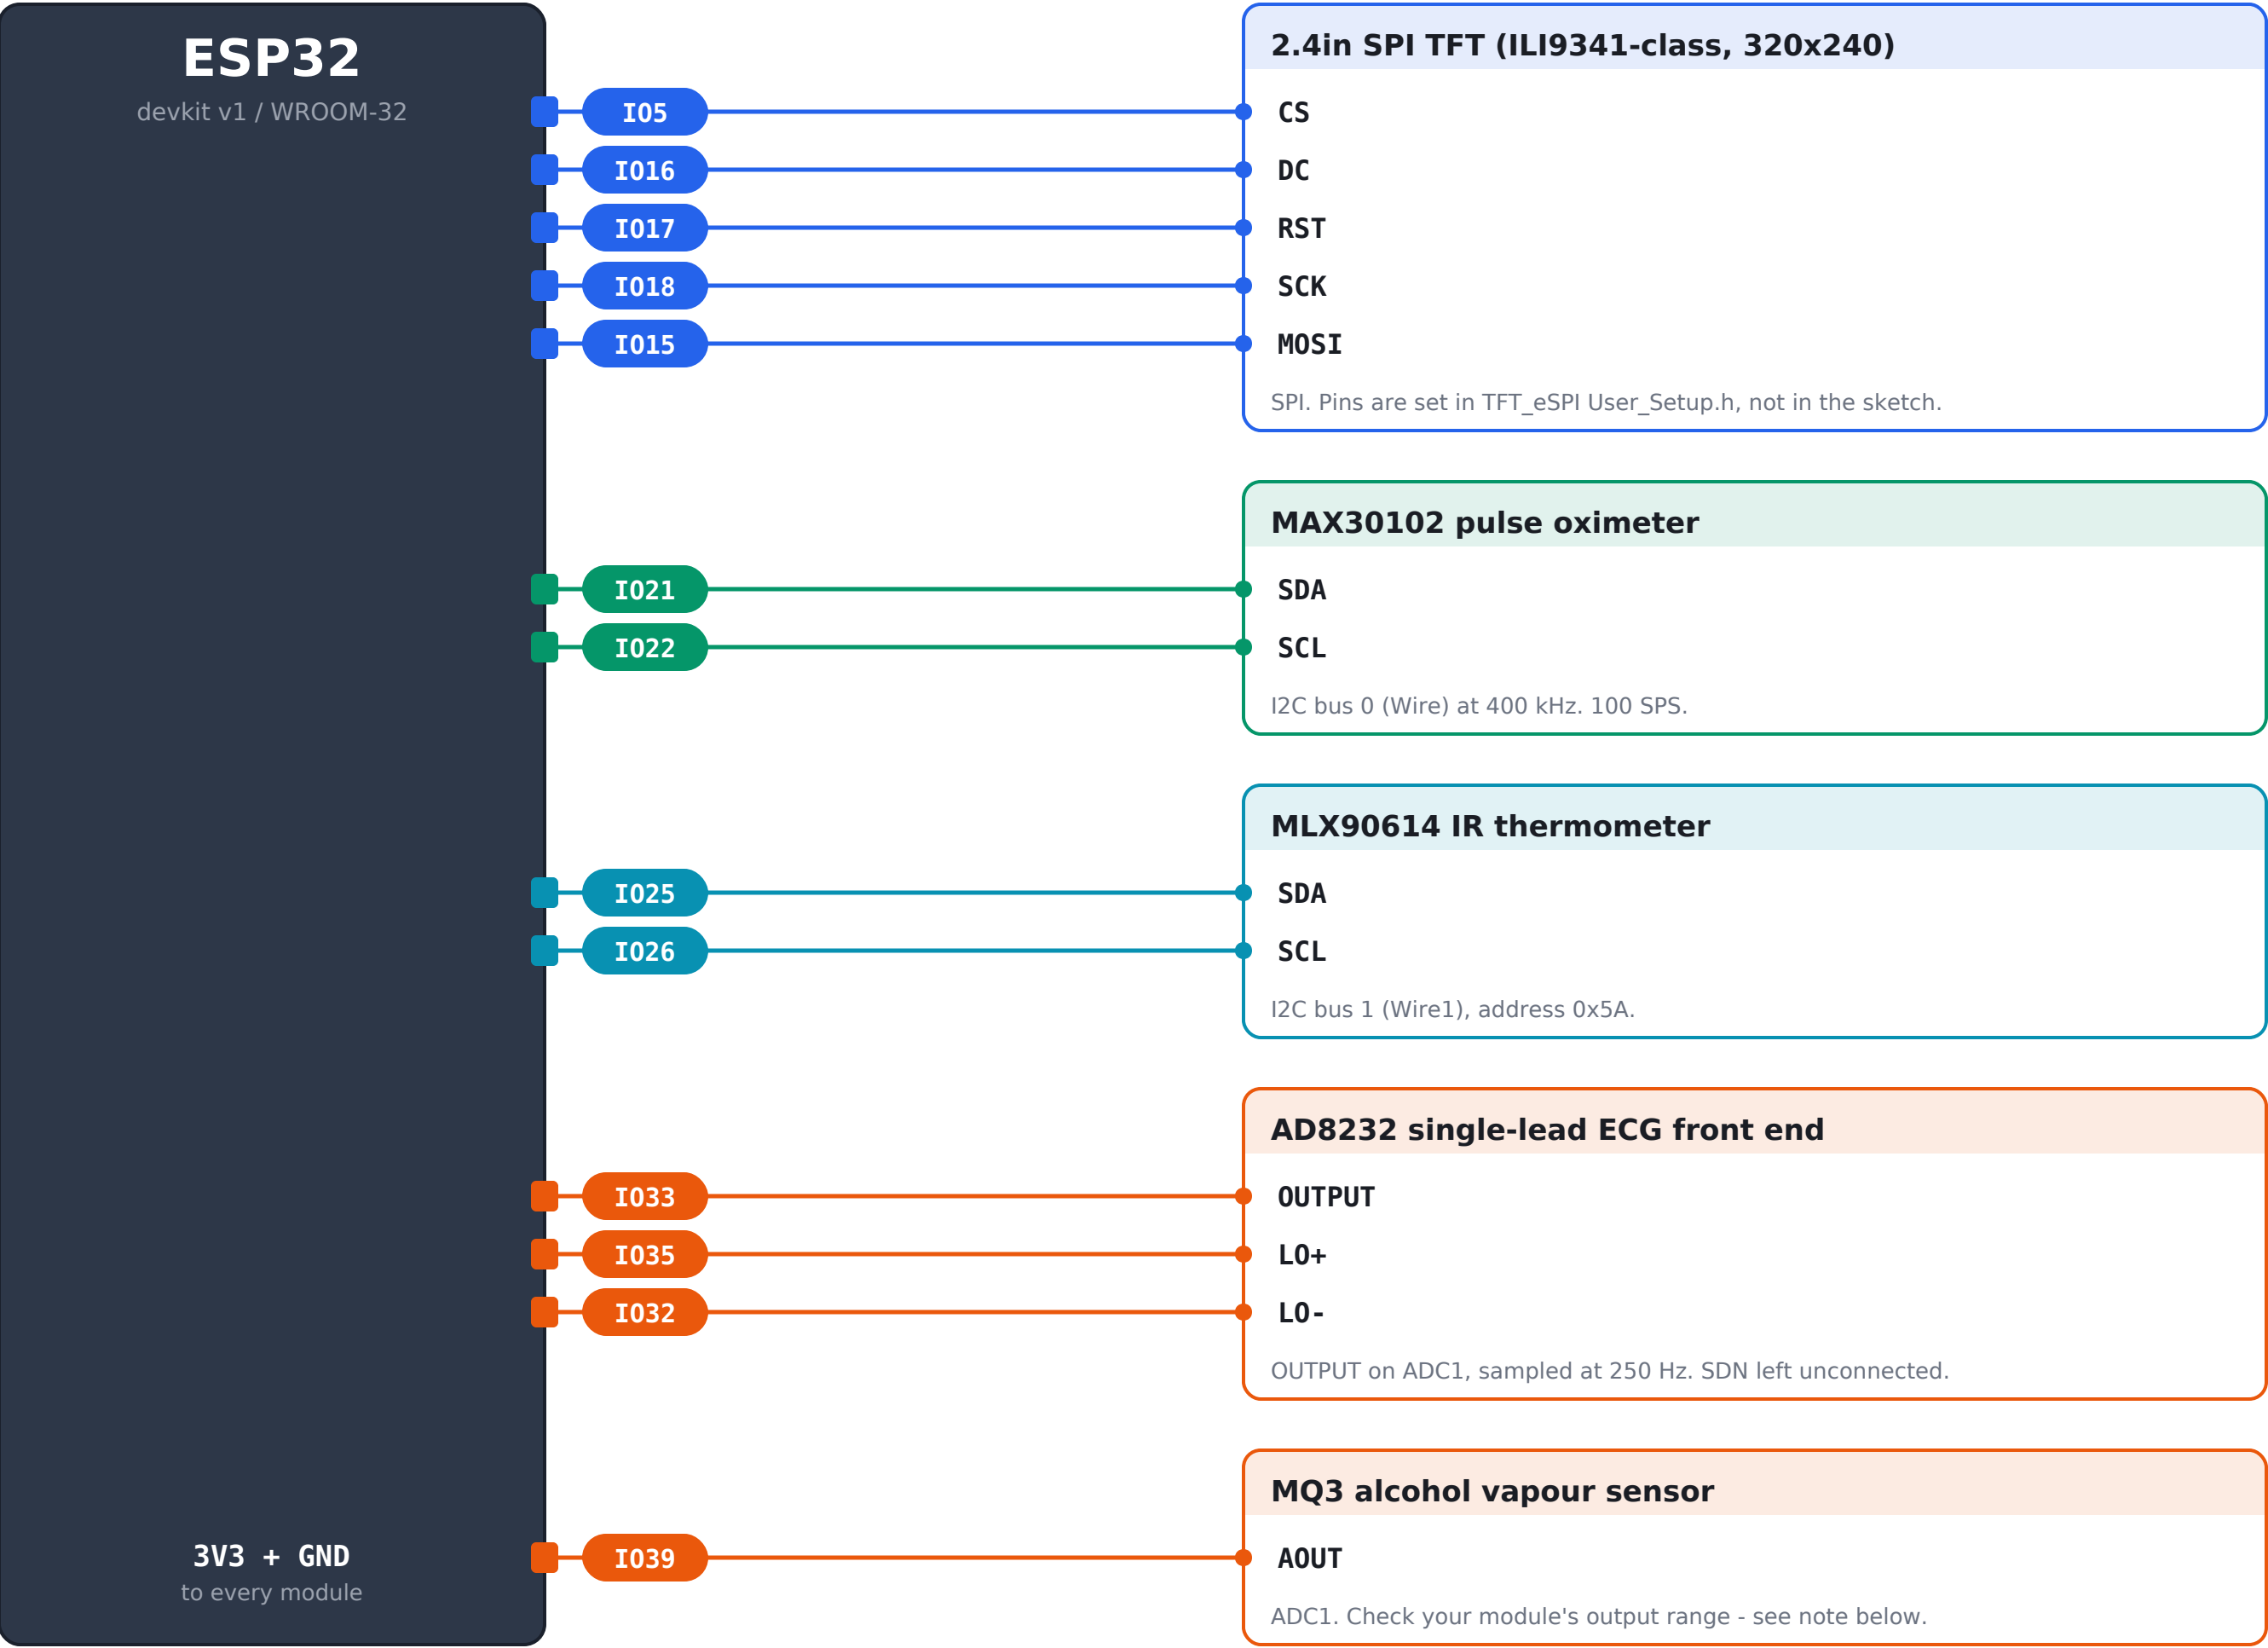

Before you wire it

- GPIO 34/35/36/39 are INPUT ONLY on the classic ESP32 - no output driver, no internal pull-ups.
- GPIO 15 is a strapping pin. It boots high, which is correct here. Never tie it externally low.
- Both analog inputs (33, 39) are on ADC1. ADC2 cannot be read while WiFi is active.
- MQ3 modules often run the heater from 5 V and can swing AOUT above 3.3 V - add a divider if yours does.

All modules: VCC to 3V3, GND to GND. AD8232 SDN is deliberately unconnected - the breakout holds it high.