

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Alexandre Cruz


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31134198-MG

Link kbps
256/128k

Plataforma VSAT

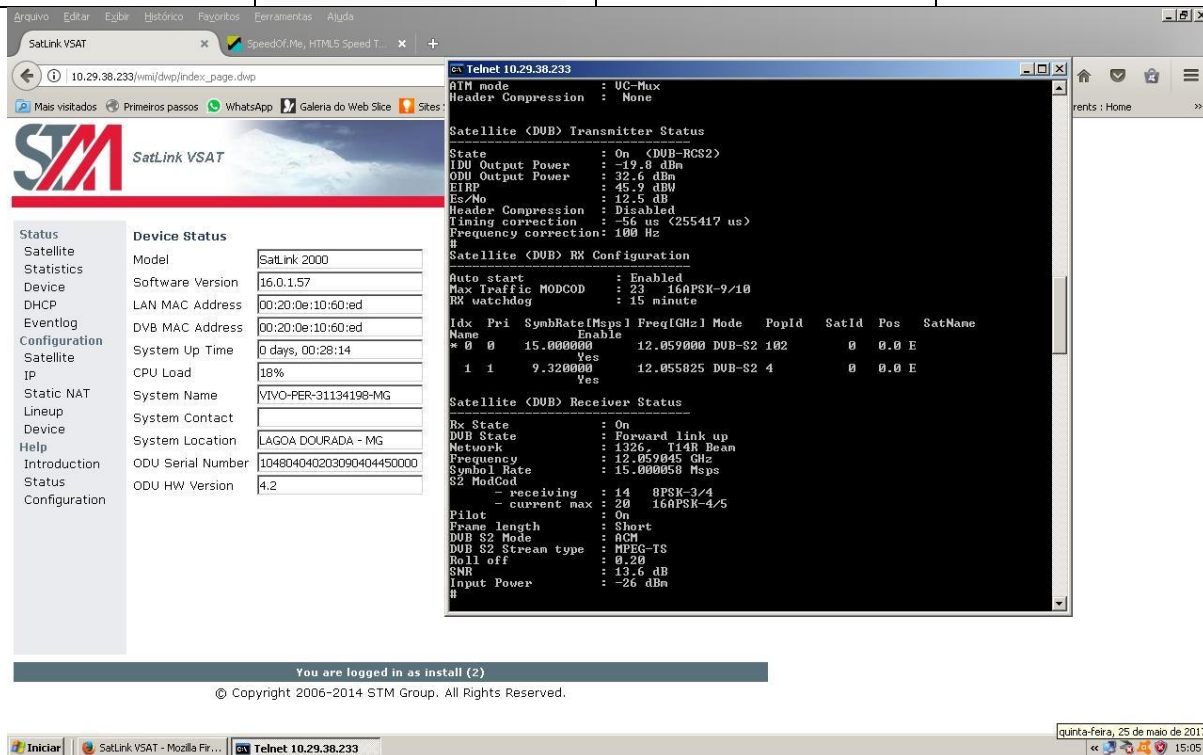

The screenshot displays the SatLink VSAT web interface. On the left, a sidebar menu includes options like Status, Satellite, Statistics, Device, DHCP, Eventlog, Configuration, and Help. The main content area is divided into two sections: 'Device Status' and 'Telnet 10.29.38.233'.

Device Status:

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:60:ed
DVB MAC Address	00:20:0e:10:60:ed
System Up Time	0 days, 00:28:14
CPU Load	18%
System Name	VIVO-PER-31134198-MG
System Contact	
System Location	LAGOA DOURADA - MG
ODU Serial Number	104804040203090404450000
ODU HW Version	4.2

Telnet 10.29.38.233:

```

ATM mode      : UC-Mux
Header Compression : None

Satellite <DVB> Transmitter Status
State          : On <DVB-RCS2>
IDU Output Power : -19.8 dBm
ODU Output Power : 32.6 dBm
EIRP           : 45.9 dBW
Es/No          : 12.5 dB
Header Compression : Disabled
Timing correction : -56 us <255417 us>
Frequency correction : 100 Hz

Satellite <DVB> RX Configuration
Auto start     : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog    : 15 minute

Idx Pri SymbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName
Name Enable
* 0 0 15.000000 12.059000 DVB-S2 102 0 0.0 E
1 1 9.320000 12.055025 DVB-S2 4 0 0.0 E

Satellite <DVB> Receiver Status
Rx State       : On
DVB State      : Forward link up
Network        : 1326 T14R Bean
Frequency       : 12.059045 GHz
Symbol Rate    : 15.000058 Msps
S2 ModCod      :
- receiving    : 14 8PSK-3/4
- current max  : 20 16APSK-4/5
Pilot          : On
Frame length   : Short
DVB S2 Mode    : ACM
DVB S2 Stream type : MPEG-TS
Roll off       : 0.20
SNR            : 13.6 dB
Input Power    : -26 dBm
  
```

At the bottom of the interface, a status bar indicates: "You are logged in as install (2)" and "© Copyright 2006-2014 STM Group. All Rights Reserved." The taskbar shows the system date as "quinta-feira, 25 de maio de 2017" and time as "15:05".

SatLink VSAT

10.47.9.41/wmi/dwp/index_page.dwp

Apps ★ Bookmarks Facebook Itaú - cartões Bradesco | Rede de A eHabilita

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status
Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:88:11
DVB MAC Address: 00:20:0e:10:88:11
System Up Time: 0 days, 00:33:31
CPU Load: 12%
System Name: VIVO-PER-23168951-CE
System Contact:
System Location: ABAIARA - CE
ODU Serial Number: 104804040203090602920000
ODU HW Version: 4.2

Sem título - Bloco de n...
Arquivo Editar Formatar Exibir
Ajuda
VIVO-PER-23168951-CE

as install (2)
Group, All Rights Reser...

```
C:\Users\Arnaldo>TRACERT 8.8.8.8

Rastreamento a rota para google-public-dns-a.google.com [8.8.8.8]
com no máximo 30 saltos:

  1    1 ms    <1 ms    <1 ms    10.47.9.41
  2    *      *      *      Esgotado o tempo limite do pedido.
  3   701 ms   706 ms   725 ms   172.30.3.102
  4   812 ms   600 ms   847 ms   92.39.116.18
  5   724 ms   715 ms   716 ms   static-17.112.39.92.in-addr.arpa [92.39.112.17]
  6   722 ms   598 ms   830 ms   s200-189-162-154.ipb.diveo.net.br [200.189.162.154]
  7   951 ms   706 ms   718 ms   200-147-28-129.static.uol.com.br [200.147.28.129]
  8  1600 ms   701 ms   714 ms   as15169.saopaulo.sp.ix.br [187.16.216.55]
  9   507 ms   709 ms   714 ms   108.170.245.225
 10   792 ms  1427 ms   731 ms   209.85.244.145
 11  1173 ms   672 ms   717 ms   google-public-dns-a.google.com [8.8.8.8]

Rastreamento concluído.

C:\Users\Arnaldo>ARP -A

Interface: 10.47.9.42 --- 0xd

Endereço IP      Endereço físico      Tipo
10.47.9.41       00-20-0e-10-88-11   dinâmico
10.47.9.47       ff-ff-ff-ff-ff-ff   estático
224.0.0.2        01-00-5e-00-00-02   estático
224.0.0.251      01-00-5e-00-00-fb   estático
224.0.0.252      01-00-5e-00-00-fc   estático
224.0.0.253      01-00-5e-00-00-fd   estático
229.255.255.250  01-00-5e-7f-ff-fa   estático
255.255.255.255  ff-ff-ff-ff-ff-ff   estático
```

quinta-feira, 25 de maio de 2017

maio de 2017

quinta-feira, 25 de maio de 2017

13:11:32

Alterar configurações de data e hora...

PT 13:11 25/05/2017

SatLink VSAT

10.29.38.233/wmi/dwp/index_page.dwp

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos

STM SatLink VSAT

Status
Satellite
Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration

Device Status
Model: SatLink 2000
Software Version: 16.0.1.57
LAN MAC Address: 00:20:0e:10:60:ed
DVB MAC Address: 00:20:0e:10:60:ed
System Up Time: 0 days, 00:28:14
CPU Load: 18%
System Name: VIVO-PER-31134198-MG
System Contact:
System Location: LAGOA DOURADA - MG
ODU Serial Number: 104804040203090404450000
ODU HW Version: 4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved

```
C:\Users\Arnaldo>ping 8.8.8.8

Resposta de 8.8.8.8: bytes=32 tempo=1100ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=566ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=587ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=789ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=878ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=662ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1564ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=643ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=789ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=674ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=602ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1294ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=938ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=594ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1465ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1238ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=643ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=564ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=796ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=633ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=836ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=657ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=621ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1344ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1831ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=607ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=560ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=578ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=578ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=702ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=623ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1835ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=659ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=609ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1460ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=580ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1265ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=577ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=580ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=702ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=967ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1443ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=550ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=659ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1476ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=637ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1297ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=921ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=608ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=580ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=594ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=629ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 176, Recebidos = 176, Perdidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 550ms, Máximo = 2414ms, Média = 930ms
Control+C
C:\Documents and Settings\Administrador>
```

quinta-feira, 25 de maio de 2017

15:11

