Beyond Length Matching: Electromagnetic Verification and Optimization of Differential-Pair Meanders

Animesh Chouhan
Copperhead
animesh@copperhead.sh

October 19, 2026

Abstract

A 180-degree U-bend in a differential pair makes the inner trace shorter by πs, and the usual fix is a serpentine that adds the same length back. We test that fix with full-wave simulation instead of assuming it. A controlled four-port fixture ($s = 0.508$ mm, 20 mil) is solved in openEMS (FDTD) for 22 geometries in microstrip and stripline, 140 single-port-excited runs in all, and every result is taken through mixed-mode S-parameters to receiver waveforms. The untuned bend gives 9.27 ps of skew, against 9.45 ps from geometry and the single-line effective permittivity. Tuning that makes the two centrelines exactly equal in length removes only 44–75 % of that skew: 2.29–5.16 ps remain (numerical uncertainty ± 0.31 to ± 0.43 ps), and the shortfall grows with the number of excursions. A transmission-line model built from the same lengths predicts less than 1 ps. A serpentine experiment attributes the gap to the corners of each excursion and to coupling between its folds (delay efficiency 0.84 with folds 1.0 mm apart, 0.68 at 0.15 mm). The same copper in stripline behaves the same way, so the shortfall is not a microstrip effect. The skew barely closes a 16 Gb/s differential eye (92.9 % to 91.1 % of the swing) but turns 13.6 % of it into common mode. Sizing the tuning from its own residual in one more EM iteration brings the skew to 0.15 and 0.56 ps for the broad and sparse tunings, but only to 1.90 ps for the dense accordion, whose added amplitude couples across its folds too. Everything here is simulated; nothing is measured, and a coupon plan for doing so is given.

1 Introduction

Length matching is the standard answer to intra-pair skew. A widely shared illustration [1] shows the inner trace of a U-bend arriving about 9.5 ps early at 20 mil pitch, corrected by a serpentine of about 1.6 mm. The geometry is right, and the delay estimate is reasonable for a common stackup. What the picture does not establish is the step from equal *length* to equal *delay*: a serpentine changes the coupling between the two traces where it leaves its partner, adds corners, and couples to itself across its folds. None of this appears in a CAD length report.

This paper asks one question: when a bent pair is tuned to equal centreline length, how much of the skew is actually removed, and at what cost in reflection, mode conversion and board area? We answer it for one microstrip stackup by full-wave simulation of a controlled fixture, check it in stripline, with a transmission-line model beside it to separate what length explains from what it does not.

Contributions: (i) a fixture and parameter set in which only the tuning changes (Section 3); (ii) four-port full-wave extraction with mesh convergence and an uncertainty in picoseconds (Sections 4, 6); (iii) the simulated delay efficiency of four tuning styles and two serpentines, in both media (Section 7); (iv) an EM-informed sizing step and a Pareto comparison (Section 8); (v) a coupon plan to check the predictions in hardware (Section 9). The scripts and data are released with the report (Section 11).

What is and is not claimed. Every curve and number in Sections 7 and 8 is a simulation result. Section 3 is analytical and is labelled so. No hardware was built and nothing was measured. Mode conversion is reported as S_{cd21} and as common-mode voltage at the receiver; neither is radiated emission, and no emission claim is made.

2 Background

A symmetric coupled pair carries two quasi-TEM modes. The odd mode carries the differential signal; the even mode carries common mode. In microstrip the odd mode has more of its field in air, so its effective permittivity is lower and it travels faster [2]. A length mismatch between the two traces converts part of a differential wave into common mode; the converted energy then travels at the even-mode velocity.

Mixed-mode S-parameters [3, 4] express this directly: S_{dd21} is differential transmission, S_{dd11} differential reflection, and S_{cd21} the common mode that leaves port 2 when differential mode enters port 1. For a pair whose two paths differ only by a delay $\Delta\tau$ and whose modes do not interact,

$$\left|\frac{S_{cd21}}{S_{dd21}}\right| = \left|\tan\frac{\omega\Delta\tau}{2}\right|, \tag{1}$$

which we invert to give a frequency-resolved skew. Earlier work on single-ended serpentines found that coupling between adjacent segments makes a meander electrically shorter than its length [5, 6]. Whether that matters at the scale of a single bend correction, and in a pair, is what we test.

3 Geometry and analytical estimates

The bend. Two concentric arcs that turn through θ with centreline spacing s differ in length by

$$\Delta L = (R + s)\,\theta - R\,\theta = s\,\theta, \tag{2}$$

independent of the radius R (Fig. 1). For a single 180-degree U-turn and $s = 20\,\text{mil} = 0.508\,\text{mm}$, $\Delta L = \pi s = 1.596\,\text{mm} = 62.8\,\text{mil}$. Two 180-degree turns in the same direction double this ($2\pi s$); two in opposite directions cancel in length, but the pair carries the skew, and its common mode, between them. The nominal delay difference is

$$\Delta t = \Delta L \sqrt{\varepsilon_{\text{eff}}}/c. \tag{3}$$

With $\varepsilon_{\text{eff}} = 3.8$, Eq. (3) gives 10.4 ps; the illustrated 9.5 ps corresponds to $\varepsilon_{\text{eff}} = 3.18$, a faster line. For our stackup the closed form of Hammerstad and Jensen [7] gives a single (uncoupled) line $\varepsilon_{\text{eff}} = 3.154$ and $Z_0 = 64.2\,\Omega$, so $\Delta t = 9.45$ ps. The odd- and even-mode values we extract below ($\varepsilon_{\text{eff}} = 2.97$ and 3.50) bracket this at 9.17 and 9.95 ps. Eq. (3) uses one velocity; a coupled pair has two, which is the first thing it omits.

The tuning rule. N rectangular excursions of amplitude A add

$$\Delta L_{\text{add}} \approx 2NA \tag{4}$$

of centreline. Eq. (4) omits: the length each corner treatment removes (a 45-degree chamfer of leg c removes $(2 - \sqrt{2})c$ per corner, $4(2 - \sqrt{2})c$ per excursion, which we correct for exactly); the change of mode where the tuned trace leaves its partner; the change in differential impedance over that stretch; the corner as a discontinuity whose electrical length differs from its centreline; and coupling between the folds of the excursion. Only the first is geometry. In our fixtures the amplitude is solved so that the two centrelines are equal to well under a micrometre after the chamfers are cut; the 2NA rule alone would leave the dense accordion 0.70 mm short.

The fixture. One microstrip layer over a return plane (Fig. 3, Table 1): $h = 0.2\,\text{mm}$, $\varepsilon_r = 4.3$, $w = 0.25\,\text{mm}$, $s = 0.508\,\text{mm}$. Every bent variant uses the same U-bend ($R = 1.5\,\text{mm}$ for P), the same 12 mm legs and the same launch plane, so only the tuning differs (Fig. 2): A, a straight pair of the U-bend's mean length; B, the untuned bend; C, two sparse excursions next to the bend; C far, the same two excursions next to the launch; D, a dense accordion of four; F, one broad trombone; and E, a pair-level raised-cosine excursion of both traces together,

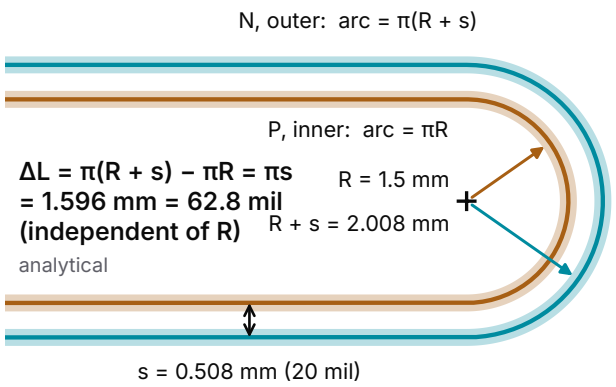


Figure 1: Analytical. Centrelines of P (inner) and N (outer) around the 180-degree bend of fixture B. The arc lengths differ by πs whatever the radius.

Table 1: Parameters. All values are **proposed** for this study; none is calibrated to a laminate or a fabricator.

Parameter	Unit	Value	Range or note
Dielectric height h	mm	0.2	fixed
Relative permittivity ε_r	–	4.3	fixed
Loss tangent at 5 GHz	–	0.02	fixed, $\propto 1/f$
Copper thickness / σ	mm / MS/m	0.035 / 58	sheet model
Trace width w	mm	0.25	fixed
Pair pitch s (centre to centre)	mm	0.508	fixed, 20 mil
Bend radius of P, R	mm	1.5	0.75, 1.5, 3.0
Leg length (launch to bend)	mm	12.0	fixed
Excursions N	–	1, 2, 4	F, C, D
Amplitude A	mm	solved	0.29–1.08
Excursion top / gap	mm	0.45–3.0	per family
Corner chamfer	mm	0.075	fixed
Stripline plane spacing	mm	0.7	trace midway
Distance to bend D	mm	0.5	0.5 or at launch
Serpentine added length	mm	6.0	fold gap 1.0, 0.15
Edge (10–90 %)	ps	35–300	post-processing
Bandwidth	GHz	0–30	Gaussian pulse
Finest cell (coarse/medium/fine)	µm	60/40/27	convergence

a control whose net turning angle is zero and which therefore leaves the length difference unchanged. Each single-trace tuning is cut into P on the leg leading into the bend and turns away from N. Every route length change is intentional and listed in Table 2. Clearance between P and N copper is checked by our generator and by KiCad 10's DRC (`kicad-cli pcb drc`, 0.15 mm rule): no clearance or short violation in any variant. KiCad does not check spacing within one net, so the fold spacing is set by the parameters: 0.20 mm edge to edge in D.

4 Numerical model

4.1 Stage II: a two-conductor line model

For the pair, the coupled telegrapher equations are

$$\frac{\mathrm{d}\mathbf{V}}{\mathrm{d}x} = -(\mathbf{R} + j\omega\mathbf{L})\,\mathbf{I}, \qquad \frac{\mathrm{d}\mathbf{I}}{\mathrm{d}x} = -(\mathbf{G} + j\omega\mathbf{C})\,\mathbf{V}, \tag{5}$$

with 2×2 per-unit-length matrices whose off-diagonal terms are the coupling [2]. For a symmetric pair the even and odd modes diagonalise them. Rather than assume a cross-section, we calibrate the modes on the full-wave straight fixture A: its S_{dd} (100 Ω) and S_{cc} (25 Ω) are each the two-port of a uniform line, from which the extraction of Eisenstadt and Eo [8] gives $Z_{\text{odd}} = 53.4\,\Omega$ ($Z_{\text{diff}} = 106.7\,\Omega$), $Z_{\text{even}} = 67.7\,\Omega$ ($Z_{\text{comm}} = 33.8\,\Omega$),

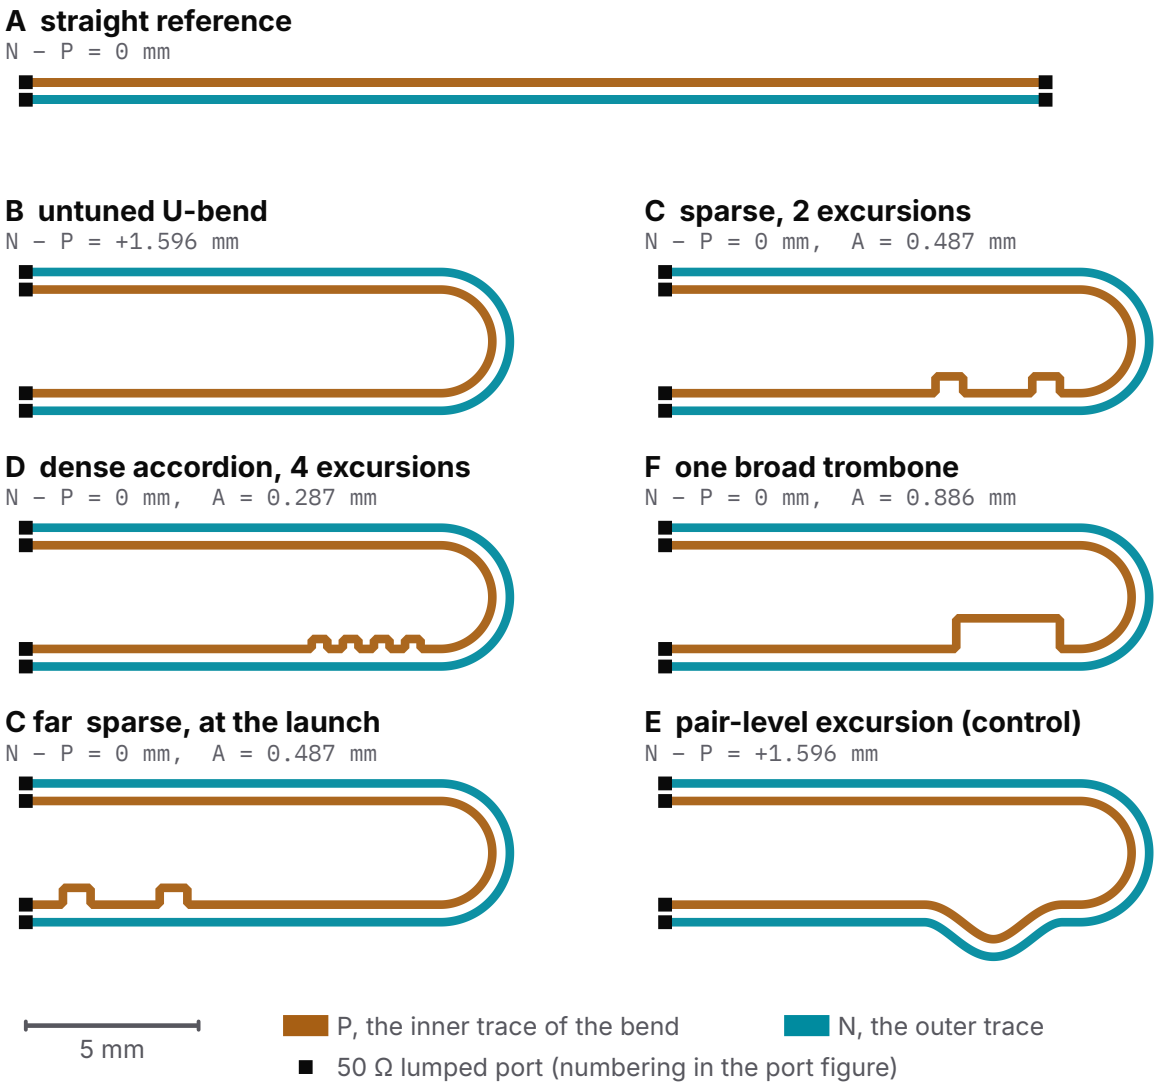


Figure 2: The variants, drawn from the copper polygons that go into the EM model, at one scale. Every tuned variant (C, C far, D, F) has P and N exactly equal in centreline length; A is the solved excursion amplitude.

$\varepsilon_{\text{eff}} = 2.97$ (odd) and 3.50 (even), with loss and dispersion, from 0.5 to 10 GHz. Each variant is then a cascade of chain matrices: coupled sections where the traces run together, and uncoupled single lines (Hammerstad–Jensen parameters) where P leaves N or where N's excess lies in the bend, spread over 18 slices. The model knows every length. It does not know corners, coupling between the folds of a meander, coupling across the U, or the bend as a discontinuity, which is exactly what makes it useful as a reference: where it disagrees with full wave, length is not the explanation.

4.2 Stage III: full-wave extraction

The solver is openEMS [9, 10], an equivalent-circuit FDTD code, version `v0.37.0-rc3-31-g6761a36`. Its Python bindings were not installed on the host, so the model is written directly in the XML vocabulary those bindings produce, which we had checked against this openEMS version before. The signal copper is a conducting sheet (35 μm, 58 MS/m) drawn from the generator's polygons; the return plane is the PEC floor of the domain; the dielectric is a lossy box (Table 1; openEMS models the loss as a fixed conductivity, so $\tan\delta$ falls as $1/f$). The other five faces are first-order Mur absorbing boundaries [11], at least 2 mm ($10h$) from any copper laterally and 2.5 mm above it.

Each trace end has a 50 Ω lumped port from the plane to the copper, on the launch plane $x = 0$ (Fig. 3). Ports are numbered in scikit-rf's mixed-mode order [12]: 1 = P near, 2 = N near, 3 = P far, 4 = N far. Each variant takes four runs, each exciting one port with the other three passive [13], with a Gaussian pulse covering 0 to 30 GHz. From each port's voltage u_k and current i_k (into the structure), the power waves [14] $a_k = (u_k + Z_0 i_k)/(2\sqrt{Z_0})$ and

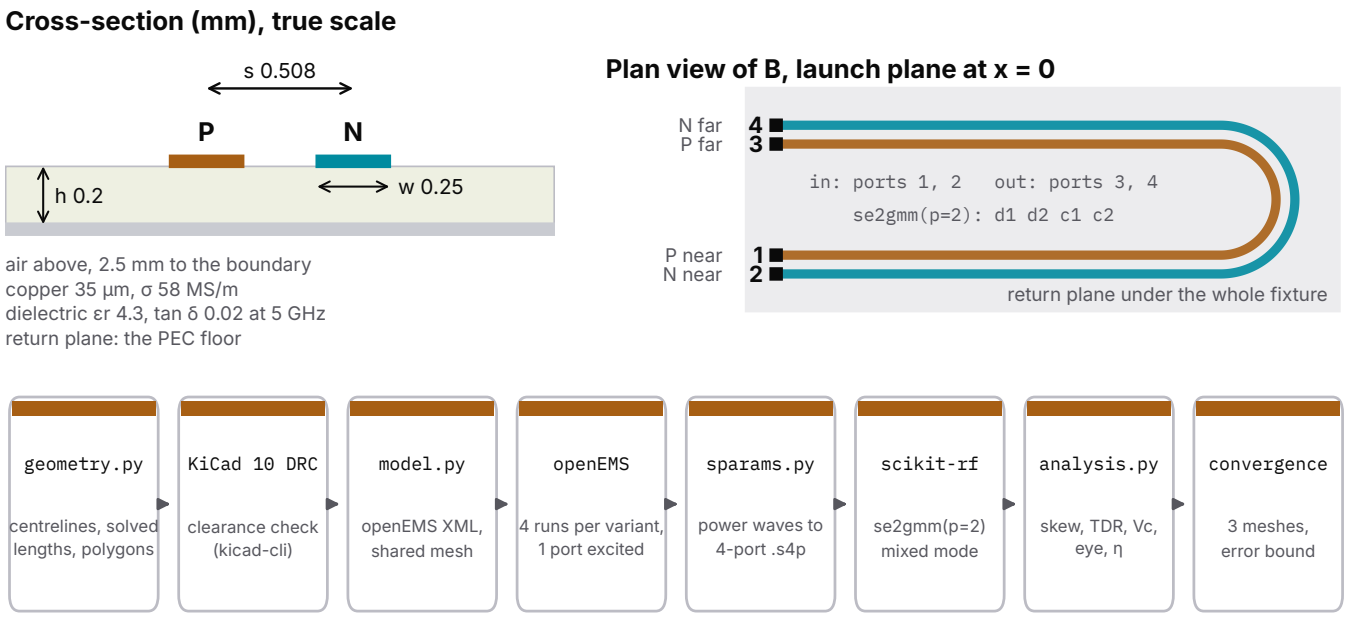


Figure 3: Top: cross-section, true scale, and fixture B with its four lumped ports on the launch plane and their mixed-mode mapping. Bottom: the pipeline. Each run keeps its model, its solver log and a provenance record (solver version, model hash, wall time, timesteps); each variant keeps its `.s4p` and its checks.

$b_k = (u_k - Z_0 i_k)/(2\sqrt{Z_0})$ give $S_{kj} = b_k/a_j$; the result is written as a Touchstone `.s4p` from DC to 30 GHz in 10 MHz steps.

The mesh is rectilinear and graded: finest cells over the copper regions (60, 40 and 27 μm for the coarse, medium and fine levels, with every straight trace edge on a grid line), growing by at most 1.3 per cell to 0.15 mm laterally and 0.3 mm in the air. All bent variants share one mesh per level, built over the union of their copper, so discretisation error in the copper they share is common to them. The medium mesh of the bent fixtures has 1.24 M cells; the fine one 2.96 M. The arcs and chamfers are staircased.

One behaviour of the solver needed care. The pulse's DC content leaves a static field in the domain whose energy settles near −38 dB, so no run reaches an energy end criterion; a pulse without DC content does, but it measures nothing useful below about 2 GHz. Every run therefore stops at a fixed 2 ns of simulated time, by which the port voltages have fallen at least 98 dB below their peak (Table 3); on fixture B (coarse mesh, port 1 excited) a 7 ns record changes the low-frequency S-parameters by about 10^{-3}.

5 Analysis metrics

Mixed mode. `se2gmm(p=2)` on the order above gives $d_{\text{near}}, d_{\text{far}}, c_{\text{near}}, c_{\text{far}}$, so $S_{dd11} = S_{00}$, $S_{dd21} = S_{10}$, $S_{cd21} = S_{30}$ (zero-based), with reference impedances of 100 Ω differential and 25 Ω common, in scikit-rf [15]. We checked this convention against the scikit-rf 2.2.0 source rather than its rendered documentation.

Waveforms. A differential step of 1 V open circuit (+1 V and −1 V, each behind 50 Ω) with a Gaussian edge of 10–90 % rise time t_r drives ports 1 and 2; ports 3 and 4 are 50 Ω to the plane (100 Ω differential, 25 Ω common). Far-end voltages follow by superposition from the four-port in the frequency domain and an inverse FFT; nothing is fitted. $V_d = V_P - V_N$, $V_c = (V_P + V_N)/2$.

Skew is $t_{50}(N \text{ falling}) - t_{50}(P \text{ rising})$ at the far end, each at half its own final value; positive means P, the inner trace, arrives first. We report 50 ps edges unless stated, and 35 to 300 ps in Section 7. Edges faster than 35 ps are not evaluated, because the simulated band ends at 30 GHz.

Delay efficiency.

$$\eta = \frac{t_{\text{skew,ref}} - t_{\text{skew}}}{\Delta L_{\text{add}} \sqrt{\varepsilon_{\text{eff}}^{\text{single}}}/c}, \tag{6}$$

where the reference is the identical untuned fixture (B, or the straight serpentine reference), ΔL_{add} is the centreline the tuning adds to P, and $\varepsilon_{\text{eff}}^{\text{single}} = 3.154$ (5.924 ps/mm) is the velocity a designer's length-to-delay conversion would use. $\eta = 1$ means the delay is what the length predicts. On the same basis the untuned bend has $\eta = 0.981$.

Other metrics, each over 0.1–20 GHz unless stated: worst $|S_{dd11}|$; RMS $|S_{cd21}|$; differential TDR impedance from the step response of S_{dd11} with a 35 ps edge; the frequency-resolved skew of Eq. (1); a PRBS7 eye at 10 Gb/s (50 ps edges) and 16 Gb/s (35 ps edges), with height at the best phase and width where the eye is open by more than 10 % of the swing; and the board area of the tuning, its length times its amplitude. No interface specification is assumed: wherever a pass or fail would need one, the target is illustrative and is to be selected for the intended interface.

Table 2: Metrics, medium mesh, 50 ps edge. ΔL_{add} is the centreline the tuning adds to P; η is Eq. (6); MTL is the line model's skew; $|S_{dd11}|$ and $|S_{cd21}|$ over 0.1–20 GHz; Z_{diff} from TDR. Skew bounds: each variant's own GCI where it was solved on three meshes, else that of the converged variant whose smallest features it shares (Section 6).

Variant	ΔL_{add} (mm)	Skew (ps)	η	MTL (ps)	V_c p-p (%)	$\lvert S_{dd11}\rvert$ max (dB)	$\lvert S_{cd21}\rvert$ RMS (dB)	Z_{diff} max (Ω)	Area (mm^2)
A straight	–	0.00 ± 0.05	–	0.00	0.00	-23.4	–	106.0	0.00
B untuned	–	9.27 ± 0.05	–	8.83	4.87	-20.7	-10.2	107.1	0.00
E pair exc.	–	9.39 ± 0.05	–	8.83	4.92	-21.4	-10.1	108.1	4.00
C sparse	1.596	3.59 ± 0.31	0.60	0.31	1.83	-21.6	-18.0	106.9	1.83
C far	1.596	4.36 ± 0.31	0.52	0.96	2.19	-19.6	-15.4	106.9	1.83
D dense	1.596	5.16 ± 0.43	0.44	0.27	2.67	-19.8	-14.9	106.9	0.95
F trombone	1.596	2.29 ± 0.31	0.74	0.23	1.16	-16.8	-22.0	114.4	2.79
C, EM-sized	2.213	0.56 ± 0.31	0.66	-2.98	0.52	-21.7	-25.2	106.7	2.40
D, EM-sized	2.484	1.90 ± 0.43	0.50	-4.50	0.98	-19.9	-22.6	106.7	1.31
F, EM-sized	1.991	0.15 ± 0.31	0.77	-1.89	0.40	-16.7	-27.8	115.0	3.41

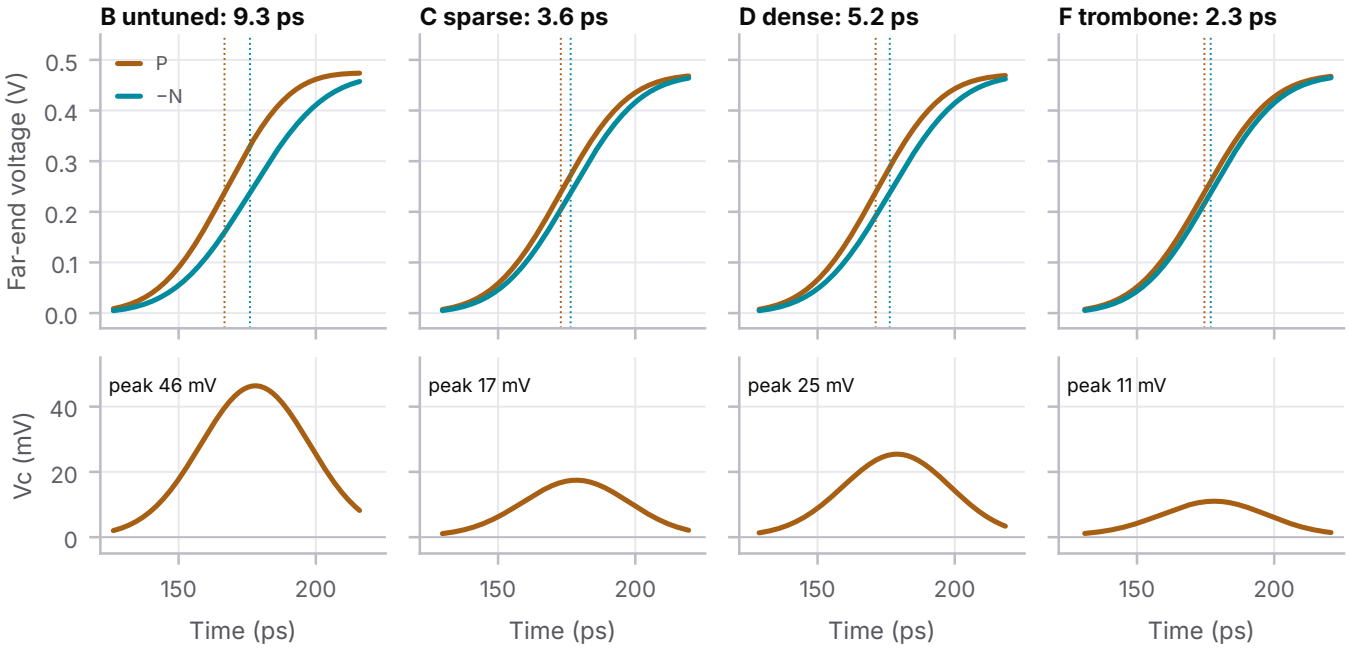


Figure 4: Far-end P and −N for a differential step (50 ps edge), and the common-mode voltage. Dotted lines mark each 50 % crossing.

6 Verification of the numerics

Table 3 lists the checks for every variant. Reciprocity holds to $|S_{ij} - S_{ji}| \leq 4.5 \times 10^{-3}$ (the straight fixture, symmetric by construction, to 3.3×10^{-7}). Every four-port is passive: the largest singular value of S over the band is 0.989 for B and no more than 0.990 for any variant. Every record ends with its port voltages at least 98 dB below their peak.

Convergence. B, C, D and the serpentine set were solved on three meshes, and D on a fourth (Table 4, Fig. 5). We report Roache's grid convergence index [16] over the three finest meshes, with safety factor 1.25 and an observed order capped at the scheme's formal order of 2; where those meshes do not converge monotonically we use three times their spread. B converges monotonically, to within 0.02 ps on the finest mesh. D's 75 μm chamfers span barely one cell on the coarse mesh, and its coarse value is the outlier; over the three finest meshes it converges monotonically, to 4.82 ps. The tight serpentine's 0.15 mm folds still oscillate across meshes. The comparison tables quote the medium mesh throughout, so each medium value carries its own bound: 1.25 times its distance from the extrapolated value, or three times the spread where the meshes oscillate (Table 4): ±0.05 ps for B, ±0.31 ps for C and ±0.43 ps for D, whose medium value runs high by about that much. A variant solved on the medium mesh only carries the bound of the converged variant whose smallest features it shares: C's for C far, F and the EM-sized C and F; D's for the EM-sized D; B's for E and the other bend radii. Because a wide bound can hide a trend or invent one, we also judge every conclusion mesh by mesh: Table 5 gives η on each mesh, each against its untuned reference on the same mesh.

Table 3: Numerical checks (medium mesh). Truncation is how far every port voltage had fallen, relative to its peak, over the last 5 % of the record.

Variant	Reciprocity $\max \lvert S_{ij} - S_{ji} \rvert$	Passivity $\max \sigma(S)$	Truncation (dB)
A straight	3.3×10^{-7}	0.989	-110
B untuned	2.4×10^{-3}	0.989	-110
C sparse	4.5×10^{-3}	0.988	-110
C far	2.8×10^{-3}	0.988	-109
D dense	3.4×10^{-3}	0.988	-110
E pair exc.	2.9×10^{-3}	0.988	-110
F trombone	2.8×10^{-3}	0.988	-110
C, EM-sized	3.7×10^{-3}	0.988	-110
D, EM-sized	3.0×10^{-3}	0.988	-110
F, EM-sized	2.0×10^{-3}	0.988	-110
Serp. ref.	6.0×10^{-5}	0.989	-110
Serp. 1.0 mm	1.8×10^{-3}	0.988	-109
Serp. 0.15 mm	2.1×10^{-3}	0.988	-109
B, R 0.75	3.5×10^{-3}	0.990	-110
B, R 3.0	2.4×10^{-3}	0.987	-108
B stripline	1.8×10^{-3}	0.989	-109
C stripline	1.4×10^{-3}	0.988	-109
D stripline	1.8×10^{-3}	0.988	-110
F stripline	2.2×10^{-3}	0.988	-109
Serp. ref. SL	2.9×10^{-5}	0.988	-99
Serp. 1.0 mm SL	1.5×10^{-3}	0.987	-98
Serp. 0.15 mm SL	1.5×10^{-3}	0.987	-98

Table 4: Mesh convergence of the skew (50 ps edge).

Variant	60 µm (ps)	40 µm (ps)	27 µm (ps)	18 µm (ps)	GCI finest	40 µm bound	Convergence
B untuned	9.54	9.27	9.25	–	±0.02	±0.05	monotonic
C sparse	3.69	3.59	3.61	–	±0.31	±0.31	oscillatory
D dense	4.45	5.16	4.88	4.84	±0.03	±0.43	monotonic
Serp. ref.	0.03	0.03	0.03	–	±0.00	±0.00	monotonic
Serp. 1.0 mm	-32.41	-29.99	-29.69	–	±0.31	±0.68	monotonic
Serp. 0.15 mm	-23.63	-24.12	-22.98	–	±3.40	±3.40	oscillatory

Table 5: Delay efficiency η (Eq. 6) on each mesh, against the untuned reference on the same mesh.

η on each mesh	60 µm	40 µm	27 µm	18 µm
C sparse	0.62	0.60	0.60	–
D dense	0.54	0.44	0.46	0.47
Serp. 1.0 mm	0.91	0.84	0.84	–
Serp. 0.15 mm	0.67	0.68	0.65	–

7 Results

All values in this section are simulated; Table 2 collects them.

7.1 The untuned bend

B shows 9.27 ps of skew at 50 ps edges, against 9.45 ps from Eq. (3) with the single-line ε_{eff}. Geometry predicts the bend well. The skew does depend on the edge: 8.92 ps at 35 ps and 10.03 ps at 300 ps (Fig. 14), moving from near the odd-mode prediction (9.17 ps) toward the even-mode one (9.95 ps) as the edge slows. The bend radius matters a little where Eq. (2) says it should not: 9.60 ps at $R = 0.75$ mm, 9.27 ps at 1.5 mm and 9.07 ps at 3 mm (Fig. 15). The pair-level excursion E leaves the skew where B has it (9.39 ps) and adds 4.3 ps of pair delay; as designed, it is not an intra-pair fix.

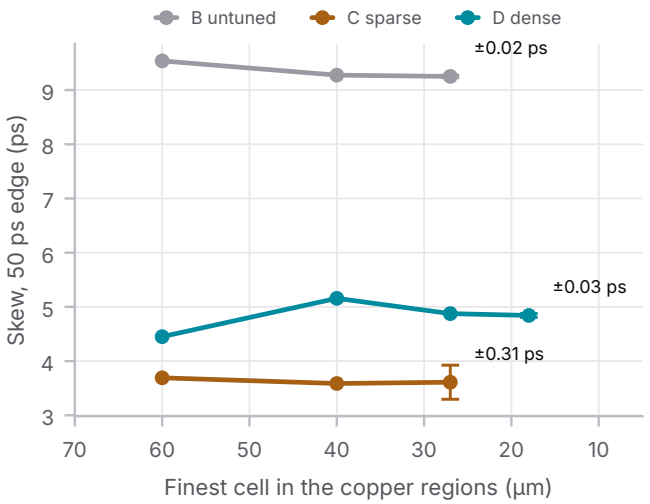


Figure 5: Skew against the finest cell size. The bar on each variant's finest point is its GCI bound.

7.2 Equal length is not equal delay

Fig. 6 is the central result. Every single-trace tuning makes P and N exactly equal in centreline length, and every one leaves skew: 2.29 ps for the broad trombone F, 3.59 ps for the two sparse excursions C (±0.31 on each), and 5.16 ps for the dense accordion D (±0.43; 4.82 ps converged). In efficiency terms (Eq. (6)), $\eta = 0.74$, 0.60 and 0.44: one, two and four excursions. The transmission-line model, given the same lengths, predicts 0.23, 0.31 and 0.27 ps. The waveforms (Fig. 4) show the same thing at the receiver: P still leads N, and the common-mode pulse falls from 4.87 % of the step for B to 1.16–2.67 %, not to zero.

7.3 Where the delay goes

The gap is consistent with two effects that the line model leaves out. The serpentine experiment isolates them: a straight pair with 6 mm added to P in three excursions, once with folds 1.0 mm apart ($5h$) and once 0.15 mm apart, the clearance rule. The two have the same corners and the same added length. With loose folds $\eta = 0.84$ (0.84–0.91 across the meshes); with tight folds $\eta = 0.68$ (0.65–0.68), 17 to 25 points lower on every mesh (Fig. 8, Table 5). Coupling between the folds is the difference between them; the loose serpentine's own shortfall, which the line model also misses, we attribute to its twelve corners. In the bend corrections the shortfall per excursion, full wave less the line model, is 1.2 to 2.1 ps for this trace width, and it does not scale with the length added, so a correction made of more, smaller excursions under-delivers more. The dense accordion D has the most corners and the closest folds, and the lowest η.

7.4 Stripline

Everything above is microstrip, where the odd and even modes travel at different velocities. To see whether that

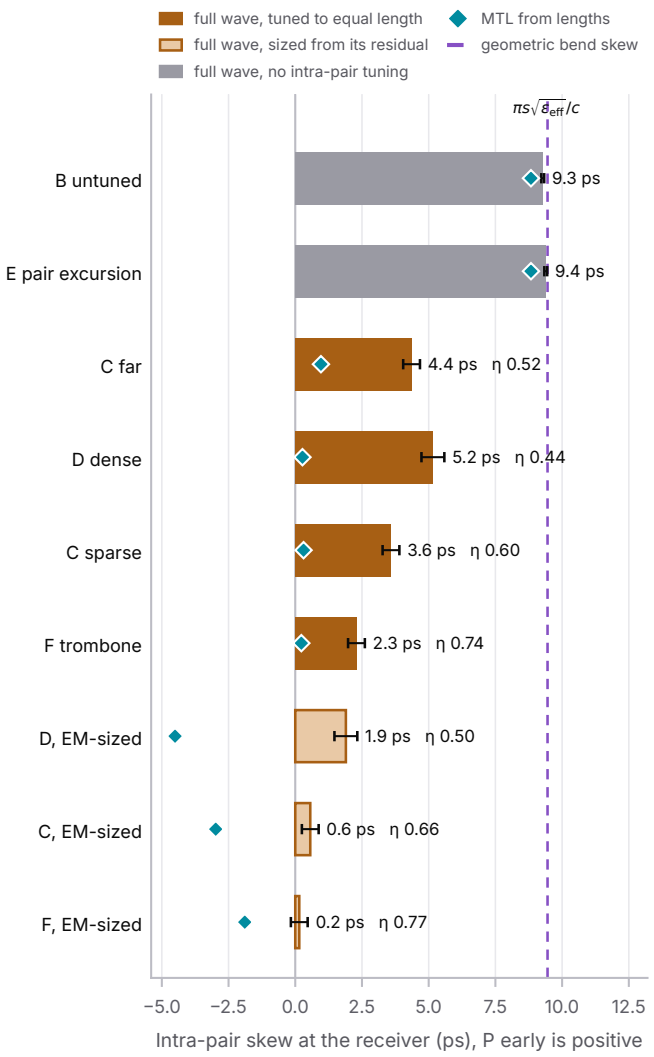


Figure 6: Skew at the receiver, 50 ps edge. Copper: tuned to exactly equal length. Grey: no intra-pair tuning. Diamonds: the transmission-line model with the same lengths. Bars: numerical uncertainty.

matters, we solved B, C, D, F and the serpentine set again in stripline: the same copper midway between two planes 0.7 mm apart, with the ports to the lower plane. Stripline is homogeneous, so its nominal velocity is $c/\sqrt{\varepsilon_r}$ (6.917 ps/mm) and Eq. (6) uses that. Geometry predicts the bend to 0.6 % (10.97 ps against 11.04 ps). The length-matched tunings remove 81, 64 and 42 % of it for F, C and D, against 75, 61 and 44 % in microstrip, and the serpentines give $\eta = 0.84$ and 0.64, a fold penalty of 20 points against 17 in microstrip (Fig. 10). We had expected less: in a homogeneous medium the far-end coupling between parallel lines vanishes. But the folds of a meander carry current in opposite directions, so what couples them acts backward along the route, and that coupling is present in both media. These stripline runs are on the medium mesh only.

7.5 Placement

C far is the same tuning as C, next to the launch instead of the bend. Its arrival skew is close (4.36 against 3.59 ps), but its mode conversion is not. Between the tuning and the bend the pair carries a skew in the other direction, and the two conversions drift apart in phase with frequency: the frequency-resolved skew of C far climbs from 4.08 ps at 5 GHz to 6.49 ps at 25 GHz, while C stays near 3.55 ps (Fig. 11). Its peak $|S_{cd21}|$ to 20 GHz is -9.9 dB against -12.9 dB for C. Compensation belongs next to the mismatch.

7.6 Reflection, impedance and mode conversion

Where a trace leaves its partner, the differential impedance rises. The broad trombone F, whose P moves 0.886 mm further from N for 3 mm, lifts Z_{diff} to 114.4 Ω against 107.1 Ω for the untuned bend (Fig. 12), and has the worst return loss of the set (-16.8 dB against -20.7 dB, Fig. 13). So the variant with the least residual skew pays for it in reflection. The dense accordion barely moves Z_{diff}. Mode conversion follows the residual skew (Fig. 7); E's is on top of B's.

7.7 What the skew does to a signal

At 16 Gb/s with 35 ps edges, the untuned bend closes the differential eye from 92.9 % to 91.1 % of the swing and leaves its width at 0.936 UI (Fig. 9). The larger effect is common mode: 13.6 % of the swing peak to peak at the receiver, against 3.3 % for F. For a receiver with good common-mode rejection the skew of a single bend is a common-mode problem more than a timing one. Whether that common mode radiates depends on the structure beyond the pair, which this study does not model.

8 Optimization

EM-informed sizing. If each excursion loses a fixed amount of delay to its corners and folds, more amplitude on the same excursions should recover it. We lengthened C, D and F by their own medium-mesh residual, converted to length at the bend's rate ($\Delta L_{\mathrm{add}} = \pi s\,(1 + t_{\mathrm{skew}}/t_{\mathrm{skew,B}})$), so that by CAD measure P is now longer than N, by 2.213, 2.484 and 1.991 mm in total added. By length alone these variants now overshoot: the line model, which sees only lengths, predicts -1.89, -2.98 and -4.50 ps. Full wave gives 0.15 ps for F and 0.56 ps for C, within or close to their numerical bound, but 1.90 ps for D. The fixed-shortfall model is the reason: the extra millimetres delivered 92 % of their expected delay in F and 83 % in C, but only 62 % in D, whose lengthened verticals couple more strongly to one another. A broad or sparse tuning is calibrated by one field solution or one

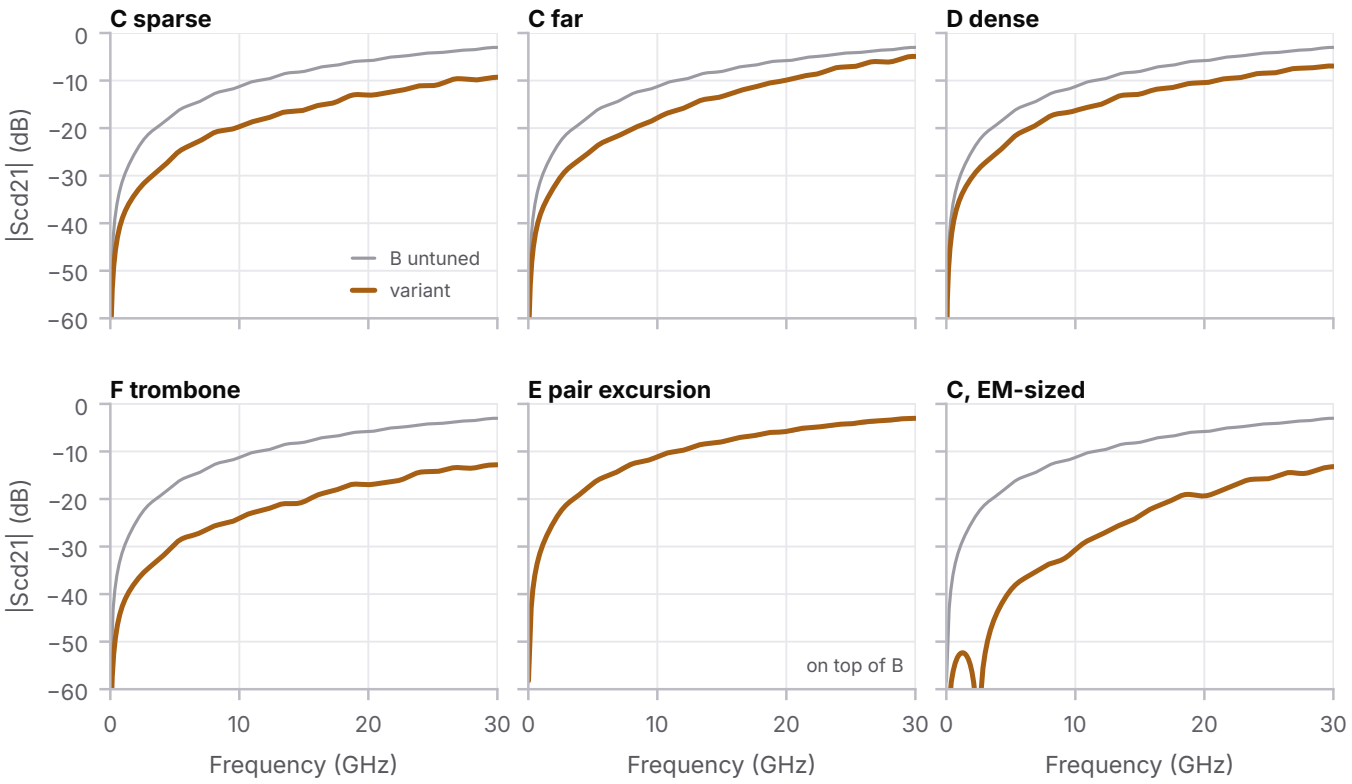


Figure 7: $|S_{cd21}|$ of each variant (copper) against the untuned bend B (grey).

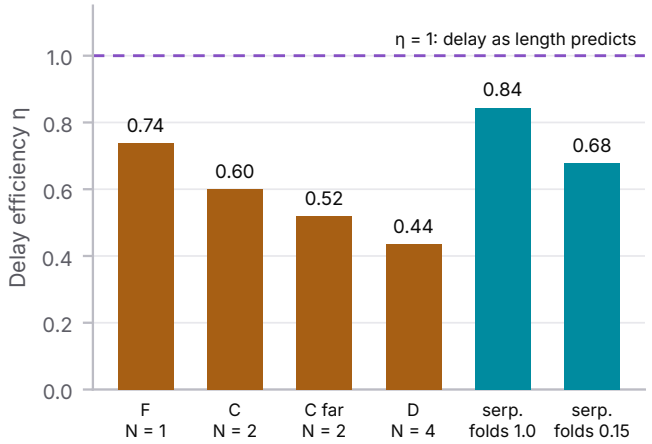


Figure 8: Delay efficiency η (Eq. 6) of the bend corrections (copper, N excursions) and of the 6 mm serpentines (teal) with loose and tight folds.

set of coupons per stackup, and a tuner could carry the per-excursion correction; a dense accordion needs iteration, which is one more reason to avoid it.

Pareto comparison. Over the bent candidates we minimise four objectives, each defined above: $|t_{\text{skew}}|$ (50 ps edge), RMS $|S_{cd21}|$, worst $|S_{dd11}|$, and tuning area. No weighted score is used. The non-dominated set is {B, C, D, C (EM-sized), D (EM-sized), F (EM-sized)}. Fig. 16 shows two projections: against area, the dense accordion is cheap and weak; against return loss, the trombone trades reflection for skew.

9 Physical validation plan

Not executed. A coupon panel with one coupon per variant (A–F, the EM-sized variants and the serpentines), each in three copies, on one laminate and stackup, with identical launches: edge-mount connectors or GSSG probe pads with ground vias, and a 2x-thru of the launch alone on the same panel for fixture de-embedding as in IEEE Std 370 [17]. Measure four-port S-parameters to 30 GHz on a calibrated VNA, de-embed to the launch plane, and microsection one coupon per panel to measure w, s, h and the copper. Extract ε_{eff} of the odd and even modes from coupon A and rerun the EM with the measured dimensions before comparing. The comparison is skew, η (Eq. 6, against B on the same panel), $|S_{dd11}|$, $|S_{cd21}|$ and TDR, with error bars from the spread of the three copies, the VNA's stated uncertainty and the GCI here. The predictions to test are that equal-length tuning leaves 2.29 to 5.16 ps at this pitch, that the shortfall grows with the excursion count, and that the same holds on a stripline panel. Near- or far-field scanning would be needed only if emission is the claim, which it is not here.

10 Recommendations

For edge-coupled pairs at this pitch and coupling, in microstrip and in stripline, and with the caveat that the numbers are simulated:

- Expect geometry to predict a bend's skew well (here within 1.9 %), and expect it to over-predict what a

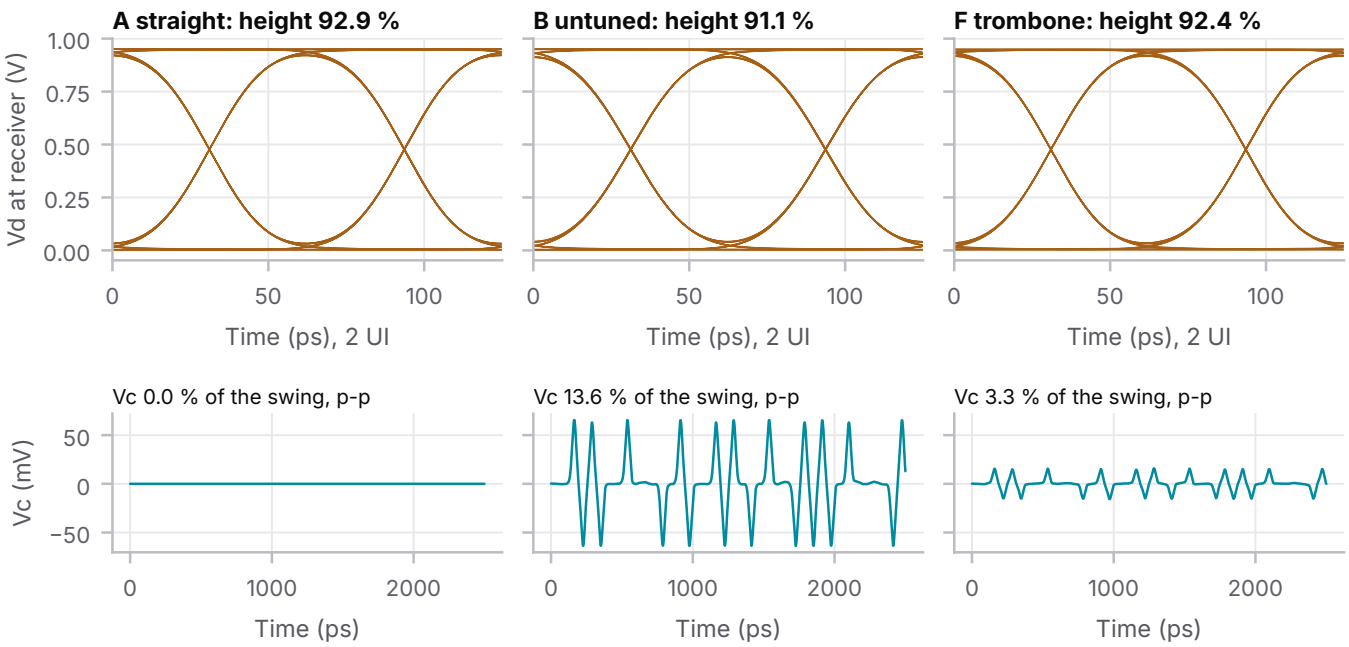


Figure 9: 16 Gb/s PRBS7 eyes (35 ps edges) and the common-mode voltage at the receiver.

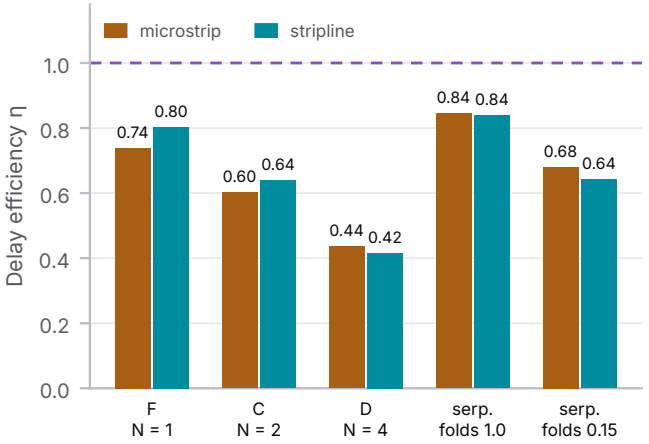


Figure 10: Delay efficiency of the same copper in microstrip and in stripline, each against its own nominal velocity.

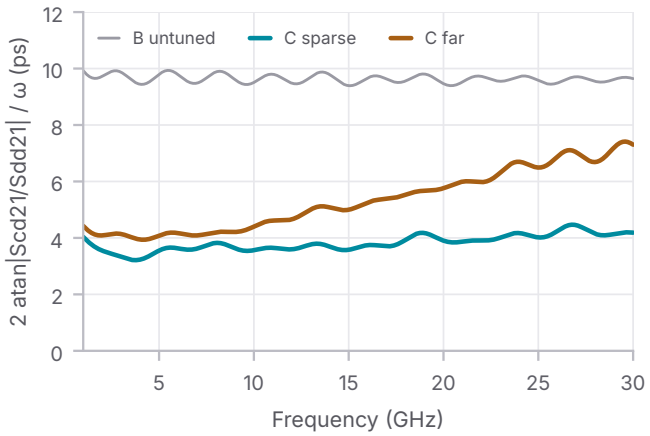


Figure 11: Frequency-resolved skew from Eq. (1). Compensation far from the bend (C far) holds at low frequency and fails as frequency rises.

length-matched tuning removes. Budget a residual, or size the tuning from a field solution or a coupon.

- Prefer few excursions. Each one costs delay in its corners regardless of its amplitude; a single excursion removed 75 % of the skew, four removed 44 %.
- Keep folds apart. Here folds at the clearance rule lost 17–25 points of efficiency against folds $5h$ apart.
- Tune next to the mismatch. The same correction at the launch matches arrival time but not phase at high frequency.
- Watch the impedance of a broad excursion: the uncoupled stretch lifts Z_{diff}, here to 114.4 Ω. Keep its amplitude small relative to the pitch or keep it short.
- A pair-level excursion does not fix intra-pair skew.
- None of this is special to microstrip. In stripline the bend's skew matched geometry to 0.6 %, the length-matched tunings removed a similar share, and tight folds cost 20 points. The edge rate and the interface decide whether a few picoseconds matter; at 16 Gb/s here they matter more as common mode than as eye closure.

11 Reproducibility

The repository holds `parameters.yaml`; `scripts/` with the geometry generator (and its KiCad export and DRC), the openEMS model writer, the run orchestrator with provenance, the S-parameter extraction, the line model, the analysis, the convergence study and the figure and table generators; and `figures/`. Every number in this report is a macro generated from `build/results/results.json`. Runs were made on one Linux host, 140 runs in all, 27.7 h of wall time in total

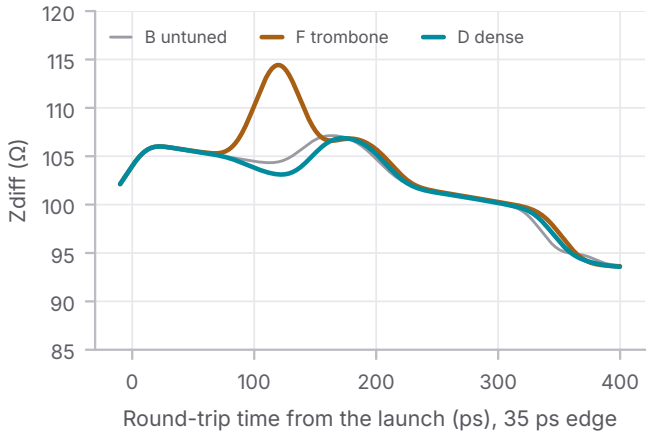


Figure 12: Differential TDR (35 ps edge). F's uncoupled stretch shows as the peak near 120 ps.

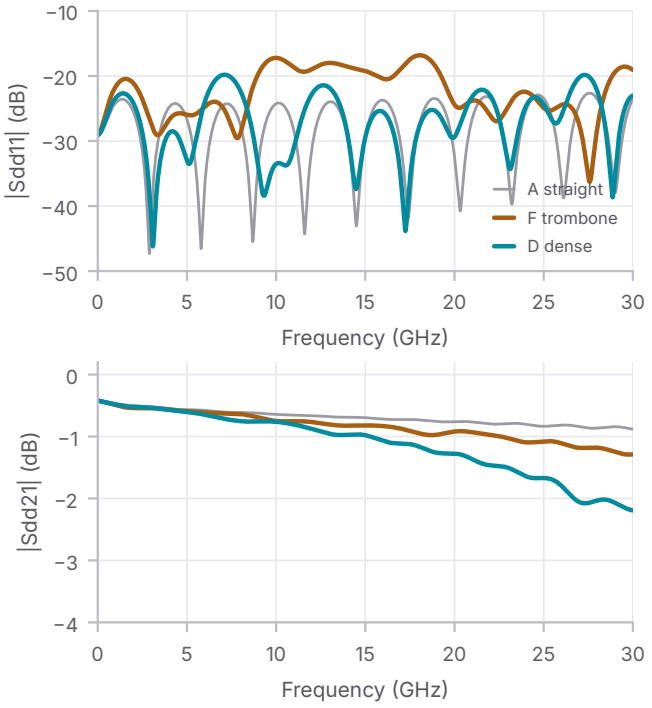


Figure 13: Differential return and insertion loss of the straight reference A, the trombone F and the dense accordion D.

on single-threaded solver processes. The `README.md` lists the commands; regenerating every figure and table from the stored S-parameters takes a few minutes.

12 Limitations

One width and one pitch, in one microstrip and one stripline stackup. The stripline ports run to the lower plane only, and its plane spacing came from a closed-form estimate; its Z_{diff} is about 95.6 Ω by TDR, so its absolute return loss is worse than microstrip's, which does not affect the skew comparisons. The return plane is a perfect conductor and the copper a conducting sheet, so conductor loss is approximate and roughness is absent. The

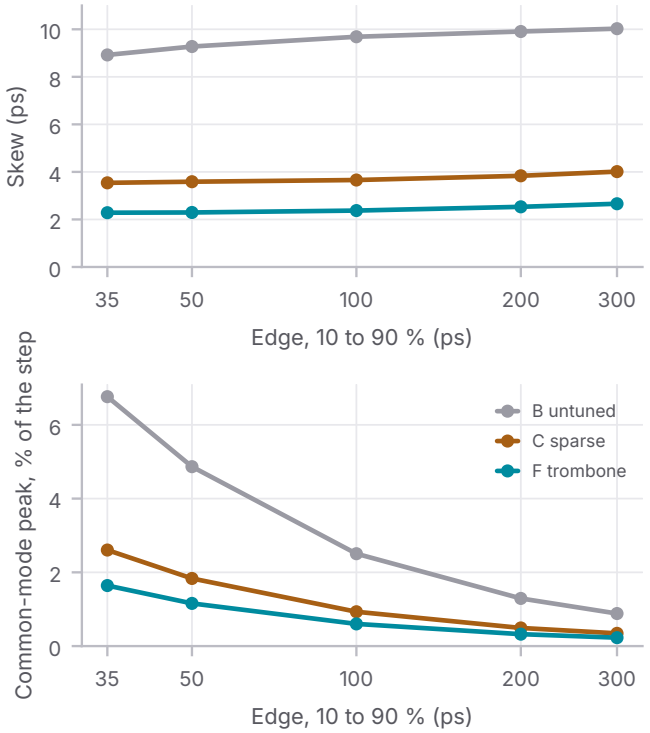


Figure 14: Skew and peak common-mode voltage against the edge rate.

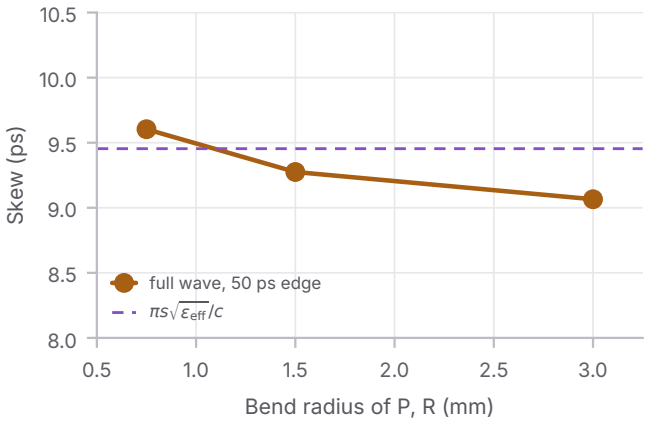


Figure 15: Skew of the untuned bend against its radius.

dielectric loss model has $\tan\delta \propto 1/f$. Lumped ports at the launch are not a connector or a probe; their reflection is common to every variant and cancels in the comparisons, but not in absolute return loss. The staircased mesh resolves the smallest features (the 75 μm chamfers) with two to three cells at the medium level; the convergence study bounds the effect for B, C, D and the serpentines only, and the stripline set was solved on one mesh. Edges faster than 35 ps and frequencies above 30 GHz are outside the simulated band. Common-mode voltage and S_{cd21} are not emissions. Nothing was measured.

13 Conclusions

At a 20 mil pitch a U-bend's skew is what geometry says, about 9 ps here. Matching the lengths does not remove

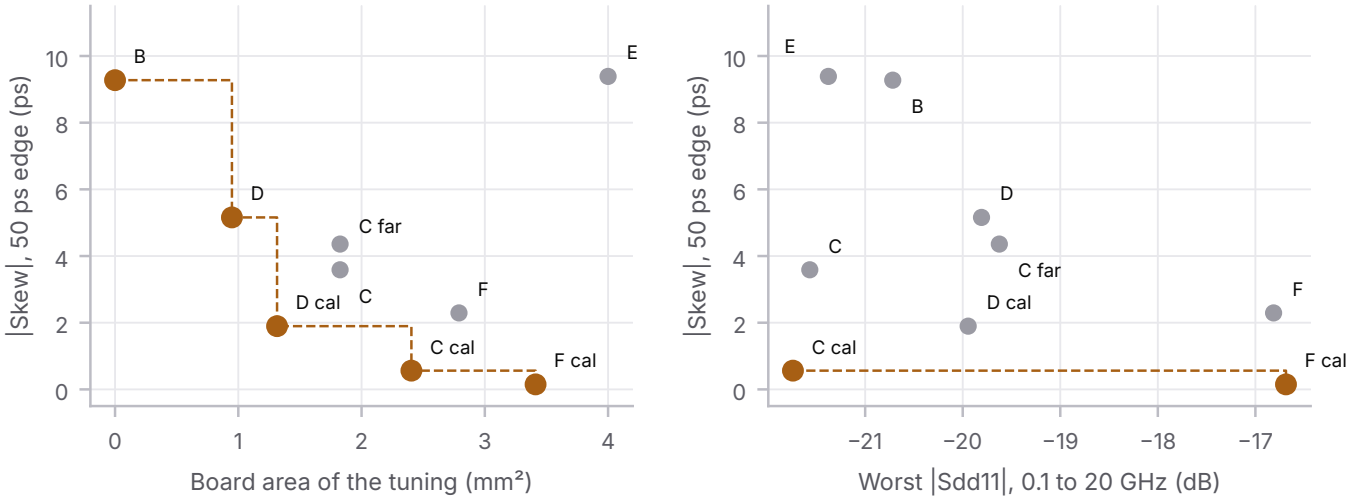


Figure 16: Two projections of the four-objective comparison. Copper points are non-dominated in that projection; the dashed line joins them.

it: a length-matched serpentine removed between 44 and 75 % of the skew in full-wave simulation, and the remainder grew with the number of excursions and the closeness of the folds. A line model with the same lengths missed nearly all of it, and the same copper in stripline behaved the same way. One field-solver iteration sized the broad and sparse tunings to within 0.15 and 0.56 ps; the dense accordion needed more. The fix is not more length matching; it is to size the tuning by its electrical effect, keep it next to the mismatch, and use few, well-separated excursions.

References

[1] @CorneliusWrites, "Post on X illustrating intra-pair skew at a U-bend and its serpentine correction," https://x.com/CorneliusWrites/status/2110776676795953595, motivation only; its content was not retrievable for verification. Accessed 19 October 2026.

[2] C. R. Paul, *Analysis of Multiconductor Transmission Lines*. Wiley-IEEE Press, 2007. [Online]. Available: https://doi.org/10.1109/9780470547212

[3] D. E. Bockelman and W. R. Eisenstadt, "Combined differential and common-mode scattering parameters: theory and simulation," *IEEE Transactions on Microwave Theory and Techniques*, vol. 43, no. 7, pp. 1530–1539, 1995. [Online]. Available: https://doi.org/10.1109/22.392911

[4] A. Ferrero and M. Pirola, "Generalized mixed-mode S-parameters," *IEEE Transactions on Microwave Theory and Techniques*, vol. 54, no. 1, pp. 458–463, 2006. [Online]. Available: https://doi.org/10.1109/TMTT.2005.860497

[5] R.-B. Wu and F.-L. Chao, "Laddering wave in serpentine delay line," *IEEE Transactions on Components, Packaging, and Manufacturing Technology: Part B*, vol. 18, no. 4, pp. 644–650, 1995. [Online]. Available: https://doi.org/10.1109/96.475270

[6] B. J. Rubin and B. Singh, "Study of meander line delay in circuit boards," *IEEE Transactions on Microwave Theory and Techniques*, vol. 48, no. 9, pp. 1452–1460, 2000. [Online]. Available: https://doi.org/10.1109/22.868994

[7] E. Hammerstad and O. Jensen, "Accurate models for microstrip computer-aided design," in *1980 IEEE MTT-S International Microwave Symposium Digest*, 1980, pp. 407–409. [Online]. Available: https://doi.org/10.1109/MWSYM.1980.1124303

[8] W. R. Eisenstadt and Y. Eo, "S-parameter-based IC interconnect transmission line characterization," *IEEE Transactions on Components, Hybrids, and Manufacturing Technology*, vol. 15, no. 4, pp. 483–490, 1992. [Online]. Available: https://doi.org/10.1109/33.159877

[9] openEMS Project, "Introduction," https://docs.openems.de/en/latest/intro.html, accessed 19 October 2026.

[10] T. Liebig, A. Rennings, S. Held, and D. Erni, "openEMS – a free and open source equivalent-circuit (EC) FDTD simulation platform supporting cylindrical coordinates suitable for the analysis of traveling wave MRI applications," *International Journal of Numerical Modelling: Electronic Networks, Devices and Fields*, vol. 26, no. 6, pp. 680–696, 2013. [Online]. Available: https://doi.org/10.1002/jnm.1875

[11] G. Mur, "Absorbing boundary conditions for the finite-difference approximation of the time-domain electromagnetic-field equations," *IEEE Transactions on Electromagnetic Compatibility*, vol. EMC-23, no. 4, pp. 377–382, 1981. [Online]. Available: https://doi.org/10.1109/TEMC.1981.303970

[12] scikit-rf, "skrf.network.Network.se2gmm," https://scikit-rf.readthedocs.io/en/latest/api/generated/skrf.network.Network.se2gmm.html, port convention checked against the source of scikit-rf 2.2.0. Accessed 19 October 2026.

[13] openEMS Project, "Ports," https://docs.openems.de/en/latest/concepts/ports.html, accessed 19 October 2026.

[14] K. Kurokawa, "Power waves and the scattering matrix," *IEEE Transactions on Microwave Theory and Techniques*, vol. 13, no. 2, pp. 194–202, 1965. [Online]. Available: https://doi.org/10.1109/TMTT.1965.1125964

[15] A. Arsenovic, J. Hillairet, J. Anderson, H. Forsten, V. Ries, M. Eller, N. Sauber, R. Weikle, W. Barnhart, and F. Forstmayr, "scikit-rf: An open source Python package for microwave network creation, analysis, and calibration," *IEEE Microwave Magazine*, vol. 23, no. 1, pp. 98–105, 2022. [Online]. Available: https://doi.org/10.1109/MMM.2021.3117139

[16] P. J. Roache, "Perspective: A method for uniform reporting of grid refinement studies," *Journal of Fluids Engineering*, vol. 116, no. 3, pp. 405–413, 1994. [Online]. Available: https://doi.org/10.1115/1.2910291

[17] IEEE, "IEEE standard for electrical characterization of printed circuit board and related interconnects at frequencies up to 50 GHz," IEEE, Standard IEEE Std 370-2020, 2021. [Online]. Available: https://doi.org/10.1109/IEEESTD.2021.9316329