

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Felipe Freire


Cliente: VIVO

Empresa EMC
Brasil

VSAT-ID
VIVO-PER-23259507-CE

Link kbps
1024k/256k

Plataforma VSAT

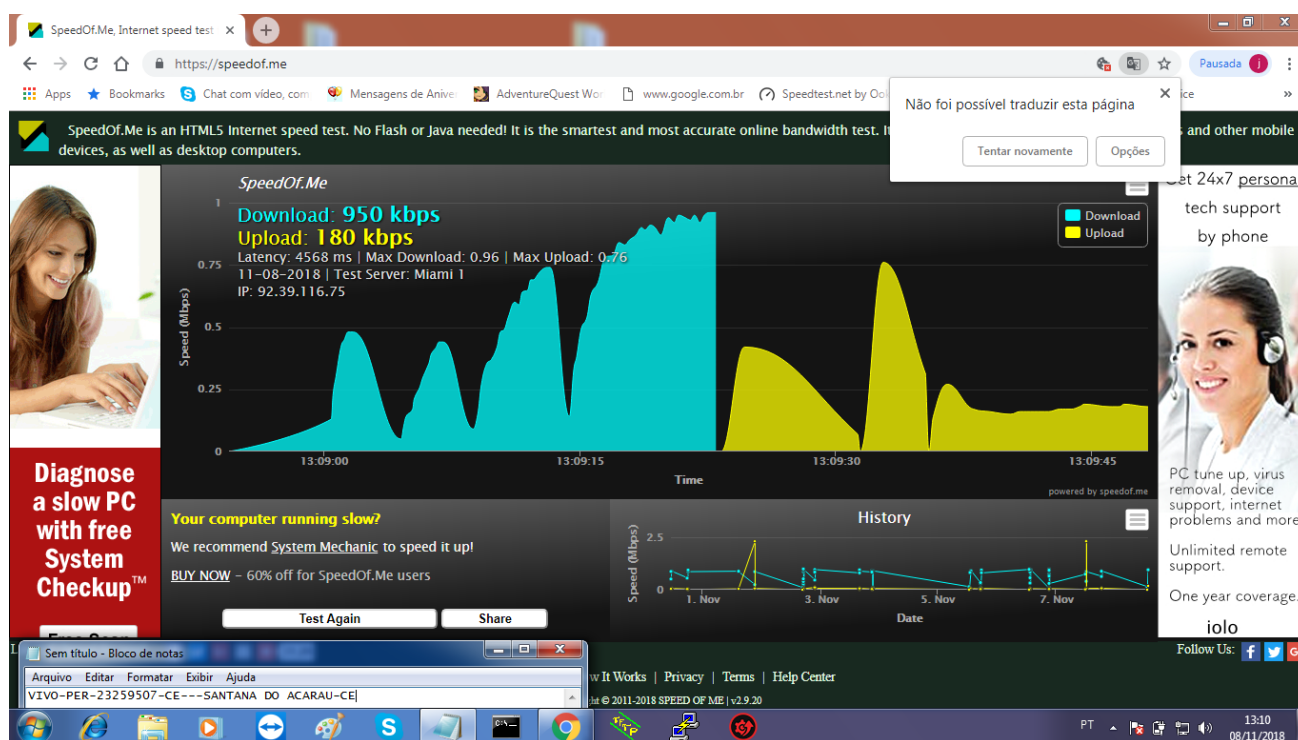

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>ping 8.8.8.8 -t

Disparando 8.8.8.8 com 32 bytes de dados:
Resposta de 8.8.8.8: bytes=32 tempo=907ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=668ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=714ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=780ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=808ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=530ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=624ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=657ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=726ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=818ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=557ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=602ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=614ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=793ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=826ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=540ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=614ms TTL=118

Estatísticas do Ping para 8.8.8.8:
    Pacotes: Enviados = 17, Recebidos = 17, Perdidos = 0 (0% de
    perda),
Aproximar um número redondo de vezes em milissegundos:
    Mínimo = 530ms, Máximo = 907ms, Média = 692ms
Control-C
^C
C:\Users\Asus>arp -a

Interface: 10.29.42.218 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.42.217      00-20-0e-10-5b-36    dinâmico
10.29.42.223      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIU0-PER-23259507-CE---SANTANA DO ACARAU-CE_
```

```
Telnet 10.29.42.217
Satellite <DUB> TX Configuration
Auto start : Enabled
BUFC status : Disabled
IDU Output Power : -18 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power : 33.0 dBm
EIRP : 46.0 dBW
Default CW Frequency : 0.000000 GHz
MIM mode : UC-Mux
Header Compression : None

Satellite <DUB> Transmitter Status
State : On <DUB-RCS2>
IDU Output Power : -16.2 dBm
ODU Output Power : 32.5 dBm
EIRP : 45.5 dBW
Es/No : 13.0 dB
Header Compression : Disabled
Timing correction : -79 us <248167 us>
Frequency correction : 780 Hz

Satellite <DUB> RX Configuration
Auto start : Enabled
Max Signalling MODCOD : 23 16APSK-9/10
Max Traffic MODCOD : 28 32APSK-9/10
RX watchdog : 15 minute

Idx Pri SymhRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName
Name Enable
* 0 0 30.000000 11.592000 DUB-S2 102 0 0.0 E
1 1 9.320000 12.055025 DUB-S2 4 0 0.0 E

Satellite <DUB> Receiver Status
Rx State : On
DUB State : Forward link up
Network : 1326 114R Beam
Frequency : 11.592158 GHz
Symbol Rate : 30.000012 Msps
S2 ModCod
- receiving : 12 8PSK-3/5
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DUB S2 Mode : QCH
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 16.0 dB
Input Power : -24 dBm
```

SatLink VSAT

Não seguro | 10.29.42.217/wmi/dwp/index_page... Pausada

Apps Bookmarks Chat com vídeo, com Mensagens de Aniver

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:0e:10:5b:36
DVB MAC Address	00:20:0e:10:5b:36
System Up Time	0 days, 00:43:55
CPU Load	26%
System Name	VIVO-PER-23259507-CE
System Contact	
System Location	SANTANA DO ACARAU-CE
ODU Serial Number	104804040203090605100000
ODU HW Version	4.2

You are logged in as install (2) on VIVO-PER-23259507-CE

© Copyright 2006-2018 NSSGlobal Technologies AS @. All Rights Reserved.

PT 13:14 08/11/2018

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>tracert 8.8.8.8

Rastreando a rota para google-public-dns-a.google.com [8.8.8.8]
com no máximo 30 saltos:

  1      1 ms      1 ms      3 ms      10.29.42.217
  2      *          *          *          Esgotado o tempo limite do pedido.
  3     996 ms    1061 ms    984 ms    172.30.3.102
  4     933 ms    1093 ms    947 ms    92.39.116.18
  5    1099 ms    1062 ms    1067 ms    static-1.112.39.92.in-addr.arpa [92.39.112.1]
  6    1179 ms    1063 ms    1087 ms    s200-189-162-154.ipb.diveo.net.br [200.189.162.1
54]
  7     983 ms    1097 ms    1061 ms    200-147-28-129.static.uol.com.br [200.147.28.129
]
  8    1175 ms    1078 ms    1079 ms    as15169.saopaulo.sp.ix.br [187.16.216.55]
  9     987 ms    1063 ms    1061 ms    108.170.245.161
 10     932 ms    1109 ms    1035 ms    216.239.56.45
 11     869 ms    1082 ms    1091 ms    google-public-dns-a.google.com [8.8.8.8]

Rastreamento concluído.

C:\Users\Asus>arp -a

Interface: 10.29.42.218 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.42.217      00-20-0e-10-5b-36    dinâmico
10.29.42.223      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIU0-PER-23259507-CE---SANTANA DO ACARAU_
```