

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Cunha


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31171026-MG

Link kbps
256k/128k

Plataforma
VSAT

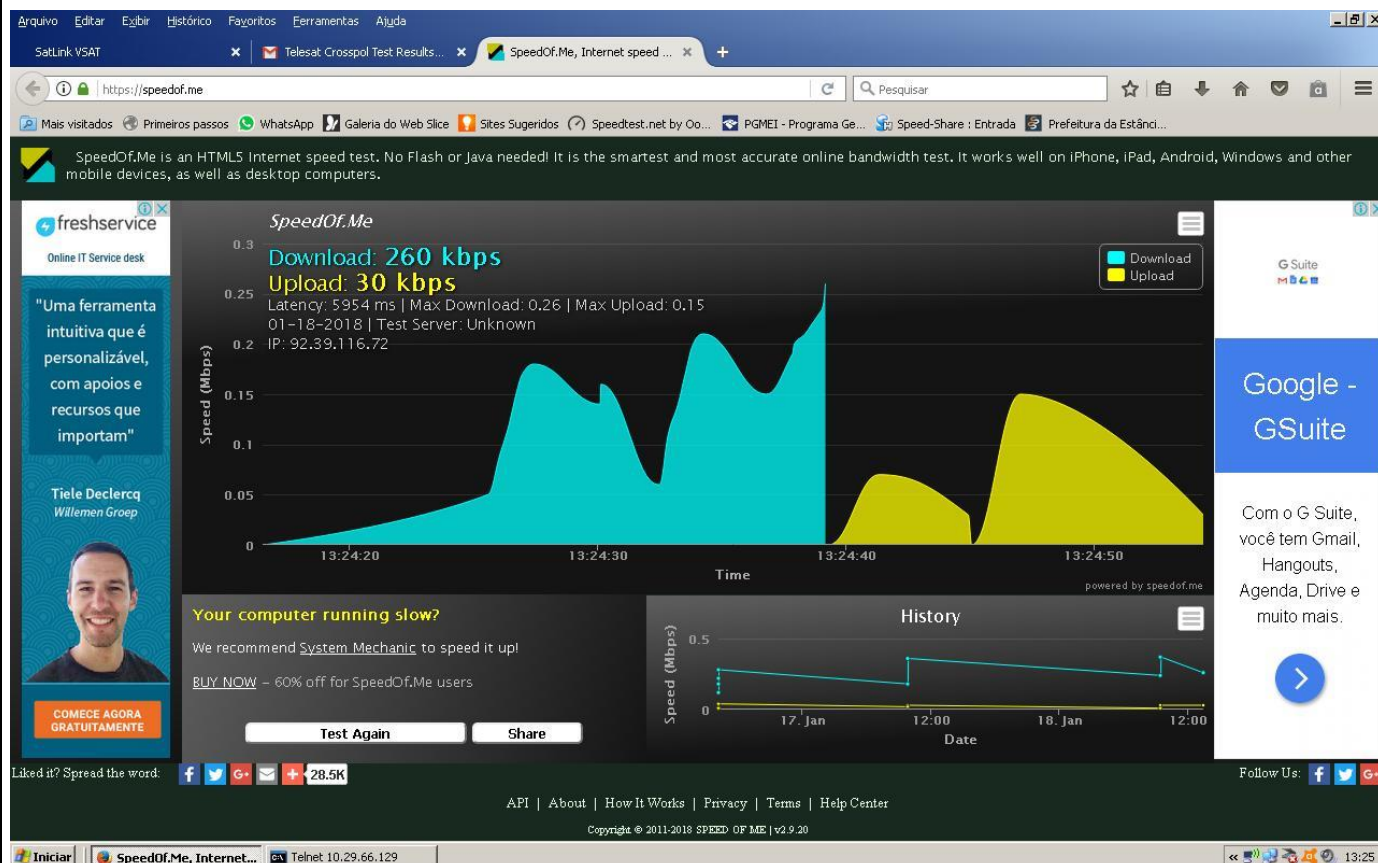

Arquivo

Editar

Exibir

Histórico

Favoritos

Ferramentas

Ajuda

SatLink VSAT

10.29.66.129/vmi/dwp/index_page.dwp

Mais visitados

Primeiros passos

WhatsApp

Galeria do Web Slice

Sites Sugeridos

Speedtest

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:57:59

00:20:0e:10:57:59

0 days, 00:03:05

23%

VIVO-PER-31171026-MG

Baependi - MG

104804040203090207790000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Prompt de comando

Resposta de 8.8.8.8: bytes=32 tempo=1039ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1064ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1115ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1070ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2031ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=835ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=921ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=986ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=859ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1140ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1120ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1029ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1107ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1081ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=923ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1129ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1073ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1083ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1083ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1078ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1085ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1080ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1067ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1085ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1080ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1077ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1078ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1070ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1079ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1082ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1070ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1084ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1067ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1082ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1091ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1069ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1077ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1085ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=831ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=794ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=879ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=950ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1027ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1081ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1095ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1066ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1106ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1049ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1076ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2163ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2135ms TTL=49

Estadísticas do Ping para 8.8.8.8:

Pacotes: Enviados = 60, Recebidos = 60, Perdidos = 0 (0% de perda),

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 794ms, Máximo = 2163ms, Média = 1112ms

Control-C

C:\Documents and Settings\Administrador>

09:16

Arquivo

Editar

Exibir

Histórico

Favoritos

Ferramentas

Ajuda

SatLink VSAT

10.29.66.129/vmi/dwp/index_page.dwp

Mais visitados

Primeiros passos

WhatsApp

Galeria do Web Slice

Sites Sugeridos

Speedtest

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

SatLink 2000

16.0.1.57

00:20:0e:10:57:59

00:20:0e:10:57:59

0 days, 00:05:33

21%

VIVO-PER-31171026-MG

Baependi - MG

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Telnet 10.29.66.129

Es/No : 7.0 dB

Header Compression : Disabled

Timing correction : -163 us (250106 us)

Frequency correction: 70 Hz

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -20 dBm

IDU Max Output Power: 0.0 dBm

Default CW Frequency: 0.000000 GHz

ATM mode : UC-Mux

Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS2)

IDU Output Power : -20.0 dBm

Es/No : 13.0 dB

Header Compression : Disabled

Timing correction : -163 us (250106 us)

Frequency correction: 60 Hz

Satellite (DVB) RX Configuration

Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

Idx Pri SymbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName

Name Enable

* 0 0 30.000000 Yes 12.050000 DVB-S2 102 0 0.0 E

1 1 25.333333 Yes 12.050000 DVB-S2 4 0 0.0 E

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, T14R Bean

Frequency : 12.050002 GHz

Symbol Rate : 30.000317 Msps

S2 ModCod

- receiving : 12 8PSK-3/5

- current max : 22 16APSK-8/9

Pilot : On

Frame length : Short

DVB S2 Mode : ACM

DVB S2 Stream type : MPEG-TS

Roll off : 0.20

SNR : 15.3 dB

Input Power : -35 dBm

13:21