


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Bruno Carvalho de Sá Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-26078384-PE256/128VSAT

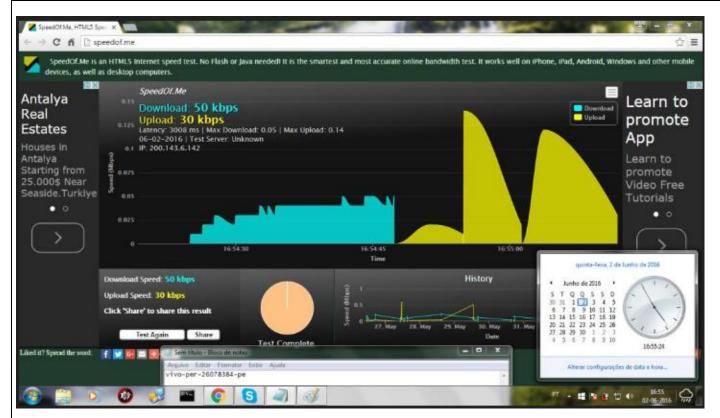

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled
IDU Output Power : -30 dBm
IDU Max Output Power: 0.0 dBm

ODU Output Power : 34.5 dBm EIRP : 47.5 dBW Default CW Frequency: 14.125850 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS)
IDU Output Power : -20.8 dBm
ODU Output Power : 34.6 dBm
EIRP : 47.6 dBW
Es/No : 14.0 dB
Header Compression : Disabled

Timing correction : -130 us (262184 us)

Frequency correction: 0 Hz

dvb rx show

Satellite (DVB) RX Configuration -----Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName Name Enable * 0 0 9.320000 12.055825 DVB-S2 102 0 0.0 E Yes Satellite (DVB) Receiver Status _____ : On : Forward link up Rx State DVB State Network : 1326, GlobalIP@Telstar-14R Frequency : 12.056185 GHz Symbol Rate : 9.319954 Msps S2 ModCod QPSK-1/4 - receiving : 1 - current max : 16 8PSK-8/9 : On Pilot Frame length DVB S2 Mode : Short : ACM DVB S2 Stream type : MPEG-TS Roll off : 0.20 : 13.7 dB SNR Input Power : -28 dBm # ping 8.8.8.8 64 bytes from 8.8.8.8: time=880 ms 64 bytes from 8.8.8.8: time=610 ms 64 bytes from 8.8.8.8: time=530 ms 64 bytes from 8.8.8.8: time=550 ms 64 bytes from 8.8.8.8: time=700 ms --- ping statistics ---5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 530/730/1280 ms

