


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogério Momi Frias Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-31075540-MG
 256/128
 VSAT

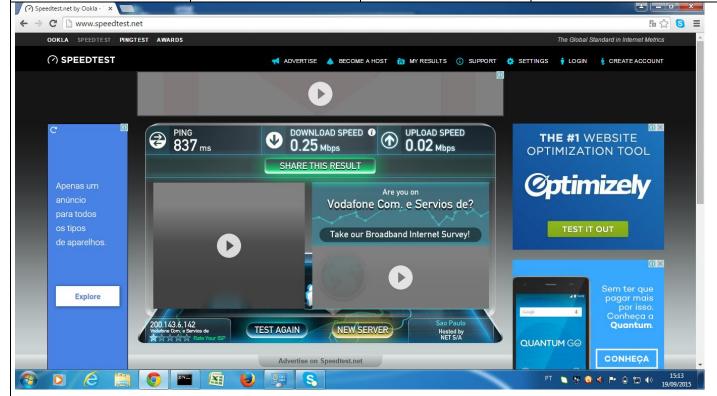

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode Popld Enable * 0 0 9.320000 12.055825 DVB-S2 102 Yes 4 4 9.320000 12.055825 DVB-S2 4 No

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency : 12.055688 GHz Symbol Rate : 9.320016 Msps

S2 ModCod

- receiving : 13 8PSK-2/3 - current max : 23 16APSK-9/10

Pilot : On

Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.20
SNR : 15.5 dB
Input Power : -28 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -30 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 34.7 dBm

EIRP : 48.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (TDMA)
IDU Output Power : -15.2 dBm
ODU Output Power : 34.6 dBm

EIRP : 47.9 dBW Es/No : 14.1 dB

Header Compression: Disabled

Timing correction : -233 us (260903 us)

Frequency correction: -30 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=680 ms 64 bytes from 8.8.8.8: time=670 ms 64 bytes from 8.8.8.8: time=1160 ms 64 bytes from 8.8.8.8: time=550 ms 64 bytes from 8.8.8.8: time=570 ms

--- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 550/720/1160 ms