


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Allan Santos Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-31298280-MG
 256k/128k
 VSAT

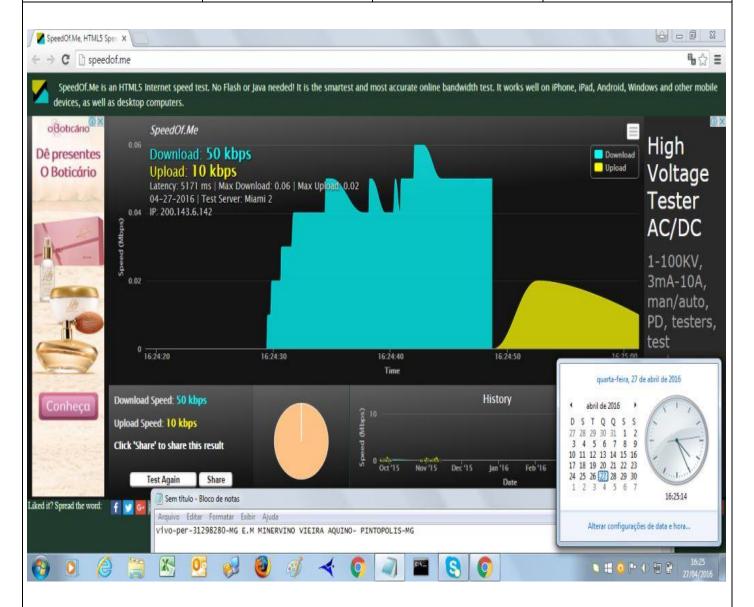

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -20 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power : 34.2 dBm

EIRP : 47.5 dBW

Default CW Frequency: 14.125750 GHz

ATM mode : VC-Mux Header Compression : None

```
Satellite (DVB) Transmitter Status
_____
                   : On (DVB-RCS)
State
IDU Output Power : -20.3 dBm
ODU Output Power : 34.1 dBm
                   : 47.4 dBW
EIRP
                   : 13.0 dB
Es/No
Header Compression : Disabled
Timing correction : -192 us (260620 us)
Frequency correction: 210 Hz
# dvb rx show
Satellite (DVB) RX Configuration
_____
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute
Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName
                                                                               Name
Enable
         9.320000 12.055825 DVB-S2 102 0 0.0 E
* 0 0
Yes
Satellite (DVB) Receiver Status
            : On
: Forward link up
: 1326. Globalto
Rx State
DVB State
                  : 1326, GlobalIP@Telstar-14R
Network
Frequency : 12.055508 GHz
Symbol Rate : 9.319880 Msps
Frequency
S2 ModCod
   - receiving : 16 8PSK-8/9
     - current max : 16 8PSK-8/9
Pilot
          : On
Frame length : Short DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR
                  : 14.7 dB
Input Power : -23 dBm
IP DVB 10.50.1.89/32
Ping desde o MGMT- Server ao IP de trafego e para o DVB.
Ping desde dentro da VSAT 8.8.8.8
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=820 ms
64 bytes from 8.8.8.8: time=730 ms
64 bytes from 8.8.8.8: time=720 ms
64 bytes from 8.8.8.8: time=700 ms
64 bytes from 8.8.8.8: time=710 ms
--- ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 700/740/820 ms
```