
JACK BOARD (3 x NJ6FD-V ~24 mm under the panel; 10-way IDC ribbon to CN3 on the main board)



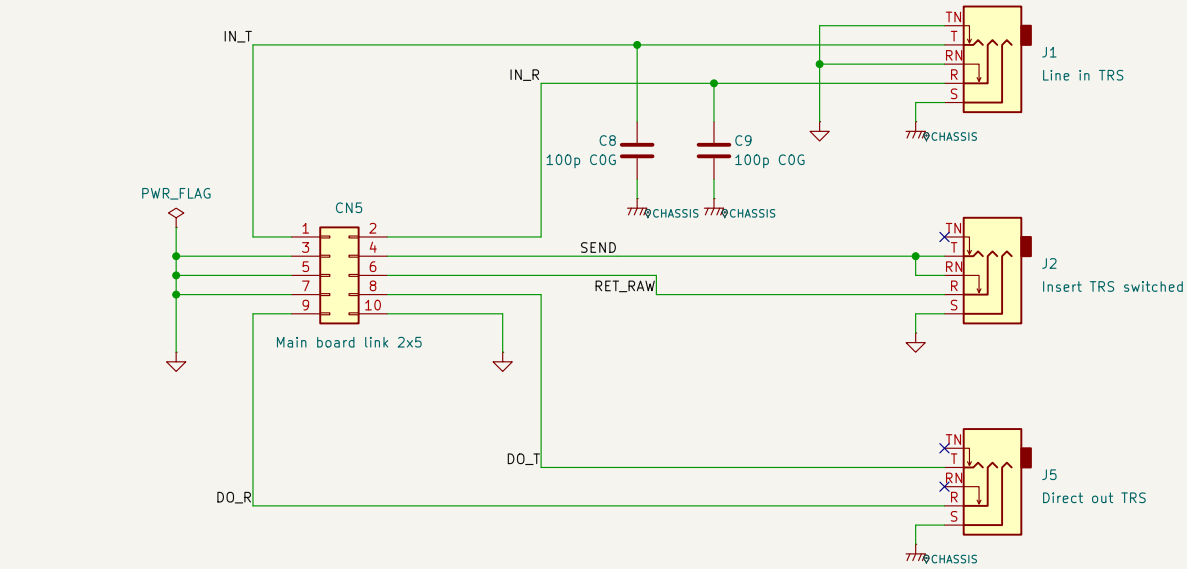

J1 line in: its normals put tip and ring on GNDA when nothing is plugged in (the 1M bias would hiss otherwise); C8 / C9 are the RF shunts at the jack.
J2 insert: tip = send, ring = return; unplugged, the ring normal puts the send on the return.
Sleeves: the balanced jacks (J1, J5) on CHASSIS, bonded to the panel through the plated standoffs H1 / H2, so cable-shield currents stay out of GNDA; the insert (single-ended) keeps GNDA.

Spec: channel_strip_schematic_spec.md 16.4
Generated by tools/gen.py together with channel_strip.kicad_sch (link pinout: LINK)

Sheet: /
File: jack_board.kicad_sch

Title: Jack board — goa console channel strip (line in, insert, direct out)

Size: A4	Date: 2026-10-19	**Rev: 5.7**
KiCad E.D.A. 10.0.7		Id: 1/1